

SHAKE LAP SIDING

Cedar Texture

Products:

- LP® SmartSide® 38 Series Shakes
 - LP® SmartSide® ExpertFinish® 38 Series Shakes
- DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Reversible design allows for staggered or straight edge



Staggered




Straight

Application Instructions:

LPCorp.com/Literature




38 SERIES CEDAR TEXTURE SHAKES

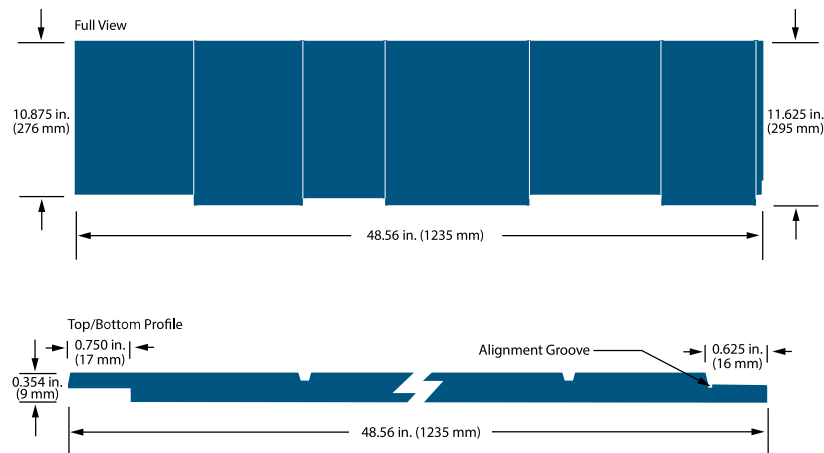

Shake Lap Siding - Cedar Texture

3/8" Nominal Thickness
Primed & Prefinished: 12" x 48"

Primed Specifications and PIDs:



PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PID
38 Series Cedar Texture Shake Lap Siding	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	42092

ExpertFinish® Color Specifications and PIDs:



COLOR	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PID
Snowscape White	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46524
Sand Dunes	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46522
Desert Stone	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46506
Quarry Gray	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46516
Prairie Clay	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46514
Terra Brown	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46528
Harvest Honey	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46510
Timberland Suede	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46530
Garden Sage	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46508
Redwood Red	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46520
Tundra Gray	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46532
Summit Blue	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46526
Rapids Blue	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46518
Cavern Steel	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46504
Midnight Shadow	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46512
Abyss Black	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	46502

SHAKE LAP SIDING

Brushed Smooth

Product:

LP® SmartSide® 38 Series Shakes

DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Application Instructions:

LPCorp.com/Literature



NEW! Brushed Smooth Shake Lap Siding

Reversible design allows for staggered or straight edge



Staggered



Straight



Shake Lap Siding - Brushed Smooth

3/8" Nominal Thickness
Primed: 12" x 48"

Primed Specifications and PIDs:



Brushed Smooth

Primed

PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PID
38 Series Brushed Smooth Shake Lap Siding	4ft. (48.56 in.) (1.2 m)	11.625 in. (295 mm)	0.354 in. (9 mm)	16 in. o.c.	1.5 PSF	48026

38 SERIES BRUSHED SMOOTH SHAKES

