

VENTED SOFFIT

Cedar Texture

Products:

- LP® SmartSide® 38 Series Vented Soffit
- LP® SmartSide® ExpertFinish® 38 Series Vented Soffit

DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Application Instructions:


LPCorp.com/Literature



38 Series Vented Soffit - Cedar Texture

3/8" Nominal Thickness
Primed: 12" | 16" | 24"
Prefinished: Varies by color

Primed Specifications and PIDs:



PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PID
38 Series Cedar Texture Vented Soffit Cut-to-Width	16 ft. (192 in.) (4.9 m)	11.94 in. (303 mm)	0.354 in. (9 mm)	24 in. o.c.	25822
	16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	24 in. o.c.	25823
	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	25824


ExpertFinish® Color Specifications and PIDs:



COLOR	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PID
Snowscape White Cut-to-Width	16 ft. (192 in.) (4.9 m)	11.94 in. (303 mm)	0.354 in. (9 mm)	24 in. o.c.	46433
	16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	24 in. o.c.	46435
	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	46540
Sand Dunes Cut-to-Width	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	46539
Quarry Gray Cut-to-Width	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	46538
Abyss Black Cut-to-Width	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	46537



38 SERIES CEDAR TEXTURE VENTED SOFFIT – CUT-TO-WIDTH

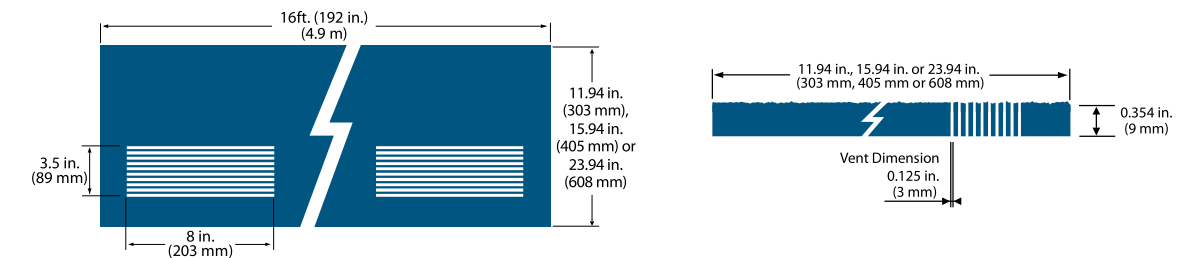

VENTED SOFFIT

Brushed Smooth

Products:

- LP® SmartSide® 38 Series Cut-to-Width Vented Soffit
- LP® SmartSide® ExpertFinish® 38 Series Vented Soffit

DESIGNED & RATED FOR EXTERIOR USE

Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Application Instructions:


LPCorp.com/Literature



38 Series Vented Soffit - Brushed Smooth


3/8" Nominal Thickness
Primed: 12" | 16" | 24"
Prefinished: Varies by color

Primed Specifications and PIDs:



PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PID
38 Series Brushed Smooth Vented Soffit Cut-to-Width	16 ft. (192 in.) (4.9 m)	11.94 in. (303 mm)	0.354 in. (9 mm)	24 in. o.c.	46964
	16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	24 in. o.c.	46043
	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	46044

ExpertFinish® Color Specifications and PIDs:



COLOR	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	PID
Snowscape White Cut-to-Width	16 ft. (192 in.) (4.9 m)	11.94 in. (303 mm)	0.354 in. (9 mm)	24 in. o.c.	47030
	16 ft. (192 in.) (4.9 m)	15.94 in. (405 mm)	0.354 in. (9 mm)	24 in. o.c.	47031
	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	47035
Sand Dunes Cut-to-Width	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	47034
Quarry Gray Cut-to-Width	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	47033
Abyss Black Cut-to-Width	16 ft. (192 in.) (4.9 m)	23.94 in. (608 mm)	0.354 in. (9 mm)	24 in. o.c.	47032



38 SERIES BRUSHED SMOOTH VENTED SOFFIT – CUT-TO-WIDTH

