



Mapelastastic™ HPG

Flexible Waterproofing and Crack-Isolation Membrane



DESCRIPTION

Mapelastastic HPG is a ready-to-use, highly flexible, liquid acrylic waterproofing membrane for installation under ceramic tile or stone on residential and light commercial interior floors and walls. Applied with a roller, trowel or brush, Mapelastastic HPG has excellent compatibility with cement-based mortars. When installed with MAPEI's Fiberglass Mesh, Mapelastastic HPG can also be used as a crack-isolation membrane and meets ANSI A118.10 standards for waterproofing. In addition, Mapelastastic HPG is IAPMO-listed for use as a shower-pan liner.

FEATURES AND BENEFITS

- Dual protection: Provides waterproofing and crack isolation
- Prevents in-plane floor cracks from transmitting through tile or stone
- Compatible with MAPEI's Fiberglass Mesh and Mapeband™ accessories
- Compatible with MAPEI mortars and grouts for complete system protection
- Durable and flexible; bonds to a wide range of surfaces
- Ready to use; easy to apply with roller, trowel or brush
- Install tile or stone after curing for 16 to 24 hours.
- Flood-test after 72-hour cure.

INDUSTRY STANDARDS AND APPROVALS

ANSI A118.10: Exceeds

ASTM C627 (Robinson): Extra heavy service rating

LEED (Version 3.0) Points Contribution

LEED Points

| | |
|--|----------------|
| MR Credit 5, Regional Materials* | Up to 2 points |
| IEQ Credit 4.2, Low-Emitting Materials – Paints & Coatings | 1 point |

* Using this MAPEI product may help contribute to LEED certification of projects in the categories shown above. Points are awarded based on contributions of all project materials.

WHERE TO USE




- For interior waterproofing vertically and horizontally behind tile and stone installations in residential to light commercial bathrooms, restrooms, kitchens and laundry rooms
- As a crack-isolation membrane over existing in-plane cracks up to 1/8" (3 mm) (see "One-Coat System" instructions) and for handling up to an additional 1/8" (3 mm) in-plane movement (see "Two-Coat System" instructions) when applied at the appropriate application thickness and system (see section "Pre-treat existing in-plane cracks" below)

LIMITATIONS

- Do not use over any substrates containing asbestos.
- Do not apply directly over gypsum-based patching or leveling compounds (see "Suitable Substrates" section below), sheet vinyl, vinyl composition tile (VCT), self-stick tile, laminate surfaces, metal or fiberglass surfaces, or poured epoxy floors.
- Do not apply directly over substrates consisting of plank wood flooring, presswood, particleboard, chipboard, oriented strand board (OSB), pressure-treated plywood, oil-treated plywood, Luaun plywood, Masonite



Mapelastic[™] HPG



- or other dimensionally unstable materials.
- Do not use over cracks or control joints subject to out-of-plane movement, or in-plane movement greater than 1/8" (3 mm).
- Do not use where excessive substrate moisture and/or where negative hydrostatic pressure exists. The maximum amount of acceptable moisture in a concrete substrate for *Mapelastic HPG* is 3 lbs. per 1,000 sq. ft. (1,36 kg per 92,9 m²) per 24 hours as determined by a calcium chloride test kit. When the moisture vapor emission rate (MVER) is in excess of 3 lbs. per 1,000 sq. ft. (1,36 kg per 92,9 m²) per 24 hours, contact MAPEI's Technical Services for recommendations.
- Do not use for constant immersion, on plywood in exterior applications, as a roof deck membrane, or as a wear surface.
- Do not use with solvent-based materials.
- Do not use premixed mastics to set tile over *Mapelastic HPG*.
- Use only a MAPEI epoxy or urethane setting material when installing moisture-sensitive natural stone or manmade tiles, such as agglomerates, over *Mapelastic HPG*.

Note: On occasion, dimensionally weak natural stone tile that normally would not be categorized as moisture-sensitive (such as travertine, limestone, marble and agglomerates) can exhibit doming, cupping or curling when using wet-set or medium-bed mortar methods of installation over impervious sheet membranes such as *Mapelastic HPG*. For this reason, areas requiring more than 3/8" (10 mm) buildup require the use of a self-leveling underlayment or cured mud-bed application before installation of *Mapelastic HPG*. When installing natural stone, always do a mockup area of the proposed installation and allow materials to reach full cure to ensure achieving the desired effect. For more information regarding these methods or materials, contact MAPEI's Technical Services before installation or design.

SUITABLE SUBSTRATES (interior only; properly prepared)

- Fully cured concrete at least 28 days old (see "Limitations")
- Masonry walls of cement block or brick
- Cured cement mortar beds and leveling coats
- Cement backer units (CBUs)
- Well-bonded, unglazed ceramic and porcelain tile, quarry tile and cement terrazzo floors.

Note: Existing unglazed ceramic tile must be abraded, and existing cement terrazzo must be mechanically profiled. Both must be skimcoated with an appropriate MAPEI latex or polymer-modified mortar.

- Well-bonded, unglazed ceramic, porcelain and quarry tile
- Gypsum wallboard (walls only, primed, in approved application areas only)
- Properly prepared radiant-heated, cement-based substrates
- Exterior-grade plywood for interior residential floors and countertops in dry areas only. Plywood must be Group 1, CC-type, conforming to APA classification and U.S. Product Standard PS 1-95 or COFI exterior plywood "Select" or "Select Tight Face" conforming to CSA-0121 standard for Douglas fir. (See TCA Handbook for additional information and following statement regarding deflection.)
- PVC, copper, brass, stainless steel penetrations (abraded)

Consult MAPEI's Technical Services Department for installation recommendations regarding substrates and conditions not listed.

Tile Council of North America (TCNA) Statement on Deflection Criteria

Floor systems, including the framing system and subfloor panels, over which tile will be installed should be in conformance with the IRC [International Residential Code] for residential applications, the IBC [International Building Code] for commercial applications, or applicable building codes.

Note: The owner should communicate in writing to the project design professional and general contractor the "intended use" of the tile installation, in order to enable the project design professional and general contractor to make necessary allowances for the expected live load, concentrated loads, impact loads, and dead loads including the weight of the tile and setting bed. The tile installer shall not be responsible for any floor framing or subfloor installation not compliant with applicable building codes, unless the tile installer or tile contractor designs and installs the floor framing or subfloor.

SURFACE PREPARATION

- Apply when substrate and ambient temperatures are between 50°F and 95°F (10°C and 35°C).
- All suitable substrates must be smooth, structurally sound and free of any substance that could prevent adhesion.
- Do not use chemical means (acid etching or stripping) to prepare approved substrates. Use mechanical methods only.
- To remove any bond-inhibiting materials, concrete substrates should be mechanically cleaned and prepared by diamond-cup grinding or other engineer-approved

methods to obtain the International Concrete Repair Institute (ICRI) concrete surface profile #2. When concrete requires more mechanical preparation, the profile will typically increase. In such cases, the surface can be made smooth by applying coats of MAPEI's *Planipatch*®.

- For details, see MAPEI's "Surface Preparation Requirements" document for tile and stone installations at www.mapei.com, or contact MAPEI's Technical Services Department.

MIXING

Mapelastc HPG is ready to use. No additional mixing is required.

PRODUCT APPLICATION

A. One-Coat System – For General Waterproofing and 1/8" (3 mm) In-Plane Crack Isolation

Pre-treat existing in-plane cracks, up to 1/8" (3 mm) wide

1. For expansion and control joints, see "Expansion and Control Joints" section.
2. Use a 1/8" (3 mm) V-notched trowel, short-nap (3/8" [10 mm]) roller or paintbrush to apply *Mapelastc HPG* at 40 mils (1 mm) in thickness and about 13" (33 cm) in width, centered over the cracks.
3. Embed a 12" (30 cm) wide piece of MAPEI's *Fiberglass Mesh*, with a roller or the trowel's flat side, into the fresh *Mapelastc HPG*. Overlap all mesh seams by 2" (5 cm).
4. Immediately top-coat the mesh with additional *Mapelastc HPG* to create a uniform, void-free surface.

Pre-treat coves and corners (within area being waterproofed)

1. Cut a 12" (30 cm) wide piece of MAPEI's *Fiberglass Mesh* to length. Fold in half (to enable tight fit on inside or outside corner). Set aside.
Note: The *Mapeband* cove roll (measuring 4.75" x 163 ft. [12 cm x 49,7 m]) may be used instead of MAPEI's *Fiberglass Mesh* to provide a durable, flexible transition at problems areas such as coves (floor/wall intersections) and corners.
2. Use 1/8" (3 mm) V-notched trowel, short-nap (3/8" [10 mm]) roller or paintbrush to apply *Mapelastc HPG* at 40 mils (1 mm) thick at least 8" to each side of the cove or corner.
3. Embed MAPEI's *Fiberglass Mesh* (or *Mapeband*) with the roller or the trowel's flat side into fresh *Mapelastc HPG*. Overlap all seams by 2" (5 cm).
4. Immediately top-coat the mesh (or *Mapeband*) with additional *Mapelastc HPG* to create a uniform, void-free surface.

Pre-treat drains

1. Drains must have a locking (bolt-down) collar.
2. If the locking collar is covered with concrete, remove concrete to a radius of 10" to 12" (25 to 30 cm) around the drain and angling down toward drain flange.
3. After the drain flange is exposed, loosen bolts on the locking collar and remove the collar from the flange.
4. Using *Planipatch*, smooth the area around the drain where concrete was removed.
5. Sand the flange top and clean.

6. Allow for a 16" x 16" (41 x 41 cm) square piece of MAPEI's *Fiberglass Mesh* around drain. Note: *Mapeband* drain flashing (available in convenient 16" x 16" [41 x 41 cm] size) may be used instead of MAPEI's *Fiberglass Mesh* to provide a durable, flexible transition at problems areas like drain/floor intersections.
7. Use a 1/8" (3 mm) V-notched trowel, short-nap (3/8" [10 mm]) roller or paintbrush, to apply *Mapelastc HPG* at 40 mils (1 mm) thick to an area larger than the pre-cut MAPEI's *Fiberglass Mesh* (or *Mapeband* drain flashing).
8. Embed the pre-cut MAPEI's *Fiberglass Mesh* (or *Mapeband* drain flashing) with the roller or a trowel's flat side into fresh *Mapelastc HPG*.
9. Immediately top-coat MAPEI's *Fiberglass Mesh* (or *Mapeband* drain flashing) with *Mapelastc HPG* to create a uniform, void-free surface.

Complete the waterproofing system

1. Wait until all pre-treated areas are dry to touch (after about 4 to 6 hours).
2. Use 1/8" (3 mm) V-notched trowel, short-nap (3/8" [10 mm]) roller or paintbrush to apply *Mapelastc HPG* over area to be waterproofed at 40 mils (1 mm) thick.
3. Let *Mapelastc HPG* dry for 4 to 6 hours.
4. Check for pinholes. Recoat as needed.
5. Let *Mapelastc HPG* dry for 16 to 24 hours at an ambient temperature of 73°F (23°C). It is then ready to receive tile, stone or bonded mortar toppings. Cure times depend on ambient temperature, substrate temperature, substrate porosity and jobsite humidity. Expect shorter drying times in warmer jobsite conditions, and longer drying times in cooler jobsite conditions.
6. With a knife, cut out the mesh (or drain flashing) that covers the drain throat. Cut out bolt holes.
7. Lift up the membrane from the flange at the throat. Apply a bead of commercial-grade silicone caulk around the top outer edge of the drain flange, and then set and bolt down the drain collar.
8. Fill the depressed area around the drain with *Mapecem*® *Quickpatch* or *Planitop*® X to the desired height.
9. Let *Mapelastc HPG* cure for 16 to 24 hours.
10. Install ceramic tile or stone with a polymer-modified or epoxy mortar. See the section "Install Ceramic Tile or Stone" below.

B. Two-Coat System – For IAPMO-Listed Shower Pan Liner Installation and 1/8" (3 mm) Additional In-Plane Movement

Pre-treat cracks, coves corners and drains

1. Pre-treat existing cracks, coves, corners, drains per the pre-treating sections above.
2. Wait until all pre-treated areas are dry to touch (after about 4 to 6 hours).

Complete the waterproofing system

1. Pre-cut pieces of MAPEI's *Fiberglass Mesh* to cover the entire area that will be waterproofed. Set aside.
2. Use a 1/8" (3 mm) V-notched trowel, short-nap (3/8" [10 mm]) roller or paintbrush to apply *Mapelastc HPG* at 40 mils (1 mm) thick, to create a uniform, void-free surface.
3. Embed pre-cut pieces of MAPEI's *Fiberglass Mesh* with a roller or a trowel's flat side into the fresh *Mapelastc HPG*. Overlap all seams by 2" (5 cm).

4. Wait until all pre-treated areas are dry to touch (after about 4 to 6 hours).
5. Apply a topcoat of *Mapelastic HPG* at 10 mils (0,25 mm) thick over entire area that is to be waterproofed.
6. With a knife, cut out MAPEI's *Fiberglass Mesh* (or *Mapeband* drain flashing) that covers the drain throat. Cut out bolt holes.
7. Lift up the membrane from the flange at the throat. Apply a bead of commercial-grade silicone caulk around the top outer edge of the drain flange, and then set and bolt down the drain collar.
8. Fill the depressed area around the drain with *Mapecem Quickpatch* or *Planitop X* to the desired height.
9. Let the application dry for 72 hours before flood-testing per the ASTM standard.
10. Plug the drain and flood-test.
11. Install ceramic tile or stone per the section "Install Ceramic Tile or Stone" below.

INSTALL CERAMIC TILE OR STONE

Use an appropriate MAPEI latex polymer-modified mortar that meets ANSI A118.4 or ANSI A118.11 industry standards, or an epoxy adhesive that meets ANSI A118.3 standards.

Note: When installing tile larger than 18" x 18" (46 x 46 cm), longer mortar-cure times may be required before tile can be grouted or walked on. For shorter turnaround times when installing larger tile, use a MAPEI rapid-set mortar such as *Ultracontact™ RS* or *Granirapid®*.


GROUTING

Select an appropriate MAPEI Portland-cement grout that meets ANSI A118.6 or ANSI A118.7 industry standards, or an epoxy grout that meets ANSI A118.3 standards. For additional information, instructions and recommended protection, see the respective Technical Data Sheet for the grout selected.

CLEANUP

1. Fresh material can be cleaned with mild, soapy, warm water.
2. Cured material must be mechanically removed.

EXPANSION AND CONTROL JOINTS

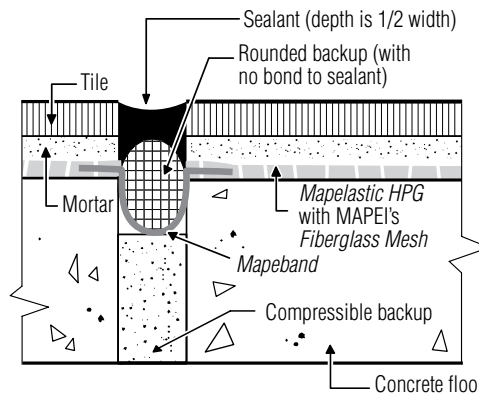

1. Do not cover any substrate expansion joint or control joints with mortar or tiles.
Provide for expansion and control joints where specified per the most current TCA handbook for ceramic tile installation, Detail EJ-171 or TTMAC Tile Installation Manual, Detail 301MJ.
2. If waterproofing integrity is required in expansion and control joints, provide per the accompanying diagram. *Mapeband* cove roll can be bonded to both sides of the joint and filled with appropriate joint sealant or an expansion molding system.
3. Protect tilework with metal strips (edge metal) along both edges of structural building expansion joints.
4. When necessary, cut tiles along both edges of the expansion joints. Do not allow tile or mortar to overlap the joints.
5. Install the specified compressible bead and sealant into all expansion and control joints.

Contact MAPEI's Technical Services for more information.

Product Performance Properties at 73°F (23°C) and 50% relative humidity

| | |
|---|----------------------|
| Elongation (ASTM D412) | 150% |
| Viscosity | About 250,000 cps |
| Direct tensile bond strength (ASTM D4541) | > 175 psi (1,21 MPa) |
| VOCs | 9 g/L |

Shelf Life and Application Properties

| | |
|---|---|
| Color (cured <i>Mapelastich HPG</i>) | Light blue |
| Color (MAPEI's <i>Fiberglass Mesh</i>) | White |
| Shelf life | 2 years (when stored in original, unopened container) |
| Storage | Store in cool, dry place. Protect from freezing. |
| Drying time between coats | 4 to 6 hours |
| Cure time before installing ceramic tile or stone | 16 to 24 hours |
| Cure time before flood-testing | 72 hours |
| Application temperature range | 50°F to 95°F (10°C to 35°C) |
| Crack-isolation protection (one-coat system, with no mesh in field) | Existing in-plane cracks up to 1/8" (3 mm) |
| Crack-isolation protection (two-coat system with mesh) | 1/8" (3 mm) of additional in-plane movement |

Final Performance Per ANSI A118.10 – Waterproofing Membranes for Thin-Set Ceramic Tile

| | |
|---|------------------------------------|
| 4.1, Fungus and microorganism resistance | Complies |
| 4.2, Seam strength | Exceeds |
| 4.3, Breaking strength | Exceeds |
| 4.4, Dimensional stability | Exceeds |
| 4.5, Waterproofness | Complies (no moisture penetration) |
| 5.3, Shear strength at 7 days | Exceeds |
| 5.4, Water immersion shear strength at 7 days | Exceeds |
| 5.5, Shear strength at 4 weeks | Exceeds |
| 5.6, Shear strength at 12 weeks | Exceeds |
| 5.7, Water immersion shear strength at 100 days | Exceeds |

Final Performance Per ANSI A118.12 – Crack-Isolation Membranes for Thin-Set Ceramic Tile

| | |
|--|-------------|
| 4.1, Fungus and microorganism resistance | Complies |
| 5.1.3, Shear strength at 7 days | Exceeds |
| 5.1.4, Water immersion shear strength at 7 days | Exceeds |
| 5.1.5, Shear strength at 4 weeks | Exceeds |
| 5.1.6, Shear strength after accelerated aging | Exceeds |
| 5.2.3, Point load resistance after 28 days' cure | Exceeds |
| 5.3, Robinson floor test (service rating) | Extra heavy |

Type of Installation And Coverage

| Method | Minimum Thickness | MAPEI's <i>Fiberglass Mesh</i> Required | Approximate Coverage* |
|---|--|---|---|
| 1-coat system (general waterproofing and crack isolation) | 40 mils (1 mm) | Over cracks, coves/corners, around drains | 40 sq. ft. per U.S. gal. (0,98 m ² per L) |
| 2-coat system (for IAPMO shower pan liner installation) | 50 mils (1,2 mm) = 1st coat at 40 mils (1 mm), 2nd coat at 10 mils (0,25 mm) | Over cracks, coves/corners, around drains, entire floor | 32 sq. ft. per U.S. gal. (0,78 m ² per L) |

* Depending on concrete profile and porosity

Mapelastic[™] HPG



Packaging (Mapelastic HPG)

| Product Code | Size | Approximate Product Coverage* |
|--------------|-----------------------------|---|
| 35553000 | Pail: 1 U.S. gal. (3,79 L) | At 1 coat: 40 sq. ft. (3,72 m ²) At 2 coats: 32 sq. ft. (2,97 m ²) |
| 35568000 | Pail: 5 U.S. gals. (18,9 L) | At 1 coat: 200 sq. ft. (18,6 m ²) At 2 coats: 160 sq. ft. (14,9 m ²) |

* Coverages shown are for estimating purposes only. Actual jobsite coverage depends on substrate conditions, and type of roller or brush used.

Packaging (MAPEI's Fiberglass Mesh)

| Product Code | Size | Approximate Product Coverage |
|--------------|--|-------------------------------------|
| 8040003 | Roll: 1 ft. x 150 ft. (0,30 x 45,7 m) | 150 sq. ft. (13,9 m ²) |
| 03201000 | Roll: 39.4 inches x 15 ft. (1 x 4,57 m) | 49.2 sq. ft. (4,57 m ²) |
| 03101000 | Roll: 39.4 inches x 75 ft. (1 x 22,9 m) | 246 sq. ft. (22,9 m ²) |
| 8040002 | Roll: 39.4 inches x 328 ft. (1 x 49,7 m) | 1075 sq. ft. (99,9 m ²) |

Packaging (MAPEI's Mapeband)

| Product Code | Size |
|--------------|--|
| 02101000 | Drain flashing (blue): 16.5" x 16.5" (42 x 42 cm) |
| 02401000 | Cove roll (blue): 4.75" x 163 ft. (12 cm x 49,7 m) |

Refer to the MSDS for specific data related to VOCs, health and safety, and handling of product.

STATEMENT OF RESPONSIBILITY

Before using, user shall determine the suitability of the product for its intended use and user alone assumes all risks and liability whatsoever in connection therewith. **ANY CLAIM SHALL BE DEEMED WAIVED UNLESS MADE IN WRITING TO US WITHIN FIFTEEN (15) DAYS FROM DATE IT WAS, OR REASONABLY SHOULD HAVE BEEN, DISCOVERED.**

We proudly support the following industry organizations:



MAPEI Headquarters of the Americas
1144 East Newport Center Drive
Deerfield Beach, Florida 33442
Phone: 1-888-US-MAPEI
(1-888-876-2734)

Technical Services
1-800-992-6273 (U.S. and Puerto Rico)
1-800-361-9309 (Canada)

Customer Service
1-800-42-MAPEI (1-800-426-2734)

For the most current **BEST-BACKED™** product data and warranty information, visit www.mapei.com.

Edition Date: March 11, 2010
PR4639 HPGD_C10Evp © 2010 MAPEI Corporation.
All Rights Reserved. Printed in the USA.