


FAS-093X-V FIRE RATED CONTROL JOINT

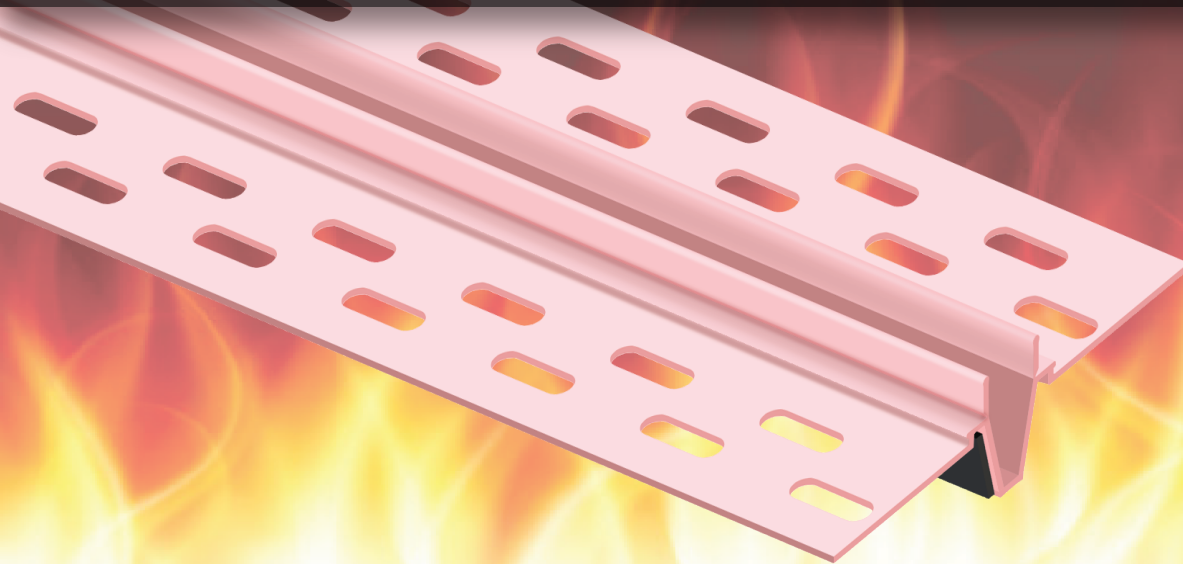

FAS-093X-V Vinyl Fire Rated Control Joint, is a composite control joint with intumescent tape factory applied to the back side of the control joint. The FAS-093X-V has been tested according to UL-2079 "Test for Fire Resistance of Building Joint Systems" and is used to relieve stresses of expansion and contraction of drywall INTERIOR and EXTERIOR partitions or ceilings running in a horizontal or vertical direction in both metal or wood framing on one side or both sides of the wall. The **FAS-093X-V** is pink in color and features a co-extruded flexible PVC center that is designed to provide a full 1/2" of protection against the stresses of expansion and contraction.

US Patent 8,671,632

Installation


FAS-093X-V can be installed with spray adhesive, drywall fasteners, or staples.

- **NO** Drywall Rips Required
- **NO** Fire Sealant Required
- **NO** Mineral Wool Required

Applicable Standards

Rigid PVC products meet ASTM specifications D3678-97 Class 2, D1784-03, C1047-99 and achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84-10.

UL-2079 Standard for Tests for Fire Resistance of Building Joint Systems.



MARINO WARE

Contact us - 800.627.4667

www.marinoware.com | © WARE Industries, Inc. 2020

