




# **INNOVATIVE** Fire-Stopping Solutions for Building Joints

**MarinoWARE FIRE BEAD** is a composite fire rated wall mount deflection bead that provides 1 & 2 hour fire-ratings in lieu of fire sealant for both dynamic and static joints according to UL-2079 5th Edition (for both standard walls and shaft walls) and is sound tested according to ASTM E90.

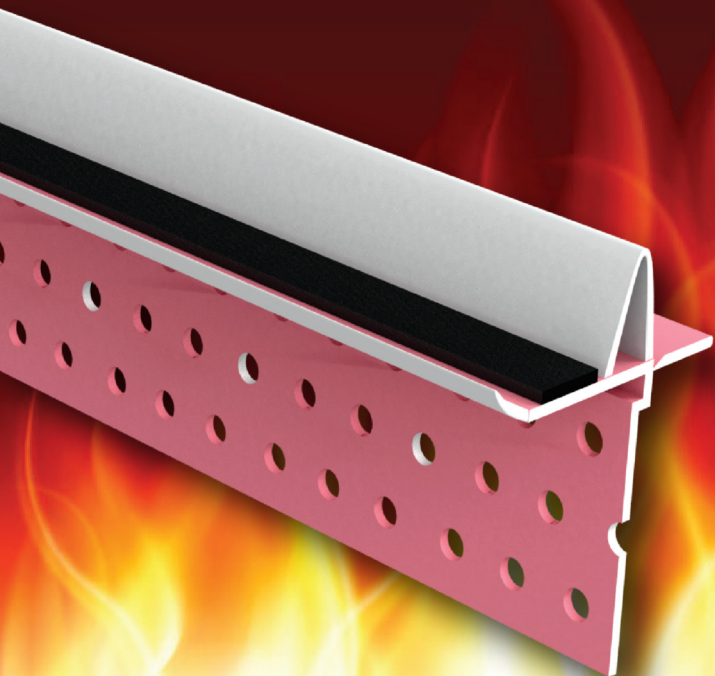

- Provides BOTH 1 & 2 hour fire ratings.

The 1-hour profile has a 1/2" gasket with a 5/8" flexible horizontal return leg.

The 2-hour profile has a 1/2" gasket with a 1-1/4" flexible horizontal return leg.

Provides an L-rating less than 1 CFM/Lin Ft for ambient and 400 degrees F.

- Installed fully cured, is not affected by water or moisture and has no temperature restrictions for installation.
- Two separate compressible sealing points, one against the concrete deck and one against the framing member to prevent sound flanking.
- Pink perforated mud leg to indicate to the installer and inspector that the vinyl accessory is fire rated.
- Stays flexible for the life of the assembly.
- Comes in 10' lengths with a 5/16" tear off leg that acts as a guide to apply joint compound without masking off adjoining surfaces.
- UL listings/approvals: HW-D-0624; HW-D-0625; HW-D-0554; HW-D-0550; BW-S-0024; WW-D-0104.
- Patent pending

**MARINOWARE®**

800.627.4661 | [www.marinoware.com](http://www.marinoware.com)



NJ | IN | GA ©WARE Industries, Inc. 2020

