




INNOVATIVE Fire-Stopping Solutions for Building Joints

MarinoWARE HOTROD XL is a fire rated wall mount deflection bead that provides 1 and 2-hour fire-ratings for both dynamic and static joints for fluted deck and concrete assemblies according to UL-2079 5th Edition (for both standard walls and shaft walls) and is sound tested according to ASTM E90. Sound Reports available upon request. No spray required over mineral wool.

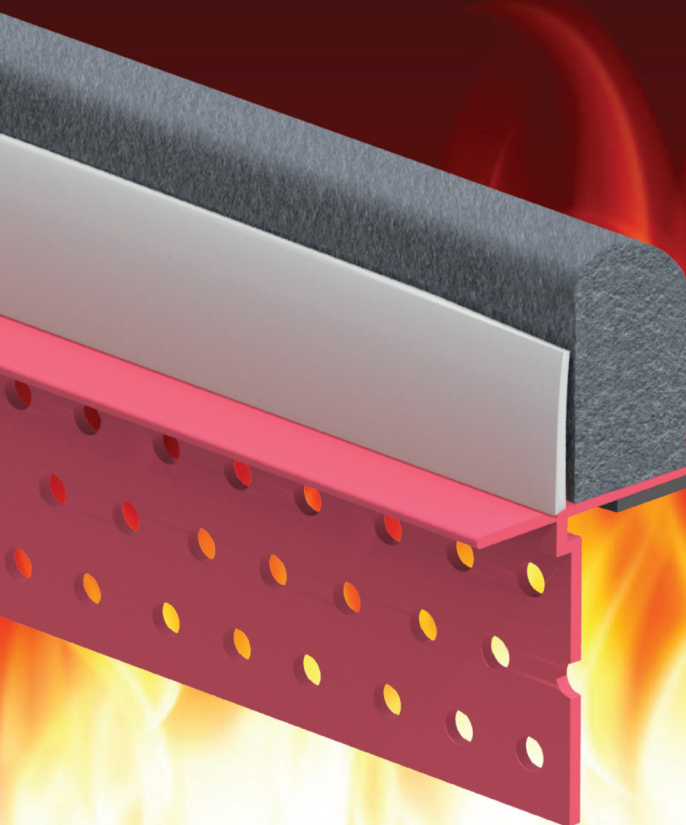

- One profile for 1HR or 2HR fire rating, L-rating less than 1 CFM/Ln Ft. for ambient and 400° F.
- Combines HOTROD compressible firestop foam with an easy to finish vinyl drywall accessory, for a 1-step application.
- Pink perforated attachment flange (mud leg) that is easily identified by an inspector that this is a UL certified firestopping accessory.
- White vinyl flexible leg conceals compressible firestopping foam and can be painted.
- Installation is not restricted by temperature or humidity.
- Pre-attached to the drywall, eliminates any post firestop installation work after the drywall is installed.
- Proper installation will provide 1/2" compression and 3/16" extension without cracking in head-of-wall, bottom-of-wall or wall-to-wall joints.
- Use with both fluted deck and concrete assemblies. Fire Spray is NOT required
- UL listings/approvals – HW-D-0624; HW-D-0625; HW-D-0554; HW-D-0550; BW-S-0024; WW-D-0104; HW-D-0514; HW-D-0518; HW-D-0524; HW-D-0652; HW-D-0620; HW-D-0573; HW-D-0525; HW-D-0553; HW-D-0621; WW-S-0061
- U.S. Patent No. US 9,683,364 and US 10,184,246

MARINO WARE®

800.627.4661 | www.marinoware.com

