

Marino\WARE® Product Submittal Data

PRODUCT NAME: 800JR250-54

05.42.00 Cold-Formed Metal Joist Framing

MARINO\WARE PART # 800RE16

PROPERTIES:

A. Web (in)	8"	Yield Strength Fy (KSI)	50
B. Flange (in)	2.5"	Tensile Strength Fu (KSI)	65
C. Lip (in)	0.75"	Design Thickness (in)	0.0566
Mils	54	Minimum Thickness (in)	0.0538
Available Finish	G60, G90	Gauge	16

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	2.14
Cross Sectional Area: A (in ²)	0.528
Moment of Inertia: I_x (in ⁴)	7.16
Section Modulus: S_x (in ³)	1.79
Radius of Gyration: R_x (in)	3.68
Gross Moment of Inertia: I_y (in ⁴)	0.444
Gross Radius of Gyration: R_y (in)	0.918

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: I_{xe} (in ⁴)	7.07
Section Modulus: S_{xe} (in ³)	1.54
Allowable Bending Moment: Ma (in-k)	46.20
Allowable Shear Force: Va (K)	1.67

TORSIONAL SECTION PROPERTIES

St. Venant Torsional Constant: Jx1000 (in ⁴)	0.563
Torsional Warping Constant: C_w (in ⁶)	7.69
Radius of Gyration on the Centroid Principal axis: Ro (in)	4.41

CODES & STANDARDS

- Framing meets ASTM A 1003, A 653, & C 955
- Tested to ASTM E 119, & E 492/E 989
- UL Fire Test Data: G563, G577, L567, & L580
- Intertek (Warnock Hersey) Fire Data: WHI 3099463, WHI 3101528



GREEN INFO LEED® v3

Available LEED® points in the following categories:

- MR Credit 2 - Construction Waste Management (1-2 points)
- MR Credit 4 - Recycled Content (1-2 points)
- MR Credit 5 - Regional Materials (1-2 points)

- Total Recycled Content: 34.9%
- Post Consumer Content: 24.3%
- Pre Consumer (Post Industrial) Content: 9.4%

- Also available in 9-1/4" and 11-1/4" Depths

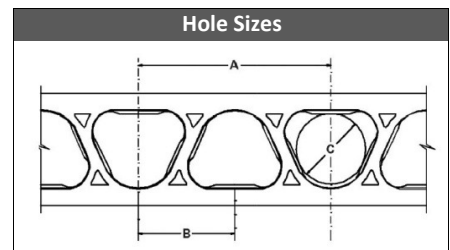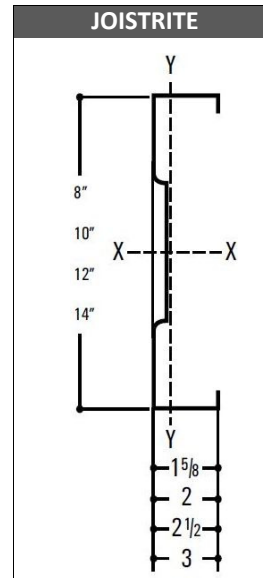

Section	A (in)	B (in)	C
8"	14	7	5.5
10"	28	14	7.2
12"	35	17.5	9.2
14"	35	17.5	9.2



www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 12/1/2011
©Copyright 2011 by Ware Industries, Inc. All rights reserved

Marino\WARE® Product Submittal Data

SPAN TABLES	15 psf Dead Load plus 40 psf Live Load						40 psf Dead Load plus 40 psf Live Load						15 psf Dead Load plus 60 psf Live Load					
	L/360			L/480			L/360			L/480			L/360			L/480		
	Single Span			Single Span			Single Span			Single Span			Single Span			Single Span		
SECTION ID	Joist Spacing (in.) o.c.			Joist Spacing (in.) o.c.			Joist Spacing (in.) o.c.			Joist Spacing (in.) o.c.			Joist Spacing (in.) o.c.			Joist Spacing (in.) o.c.		
	12	16	24	12	16	24	12	16	24	12	16	24	12	16	24	12	16	24
800JR200-43	17.0	14.8	12.0	16.1	14.6	12.0	14.1	12.3	10.0	14.1	12.3	10.0	14.6	12.6	10.3	14.0	12.6	10.3
800JR200-54	19.0	17.3	15.1	17.3	15.7	13.7	17.3	15.7	13.7	17.3	15.7	13.7	16.6	15.1	13.2	15.1	13.7	12.0
800JR200-68	20.4	18.5	16.2	18.5	16.8	14.7	18.5	16.8	14.7	18.5	16.8	14.7	17.8	16.2	14.1	16.2	14.7	12.8
800JR200-97	22.6	20.5	17.9	20.6	18.7	16.3	20.6	18.7	16.3	20.6	18.7	16.3	19.7	17.9	15.7	17.9	16.3	14.2
800JR250-43	17.7	15.3	12.5	16.7	15.2	12.5	14.7	12.7	10.4	14.7	12.7	10.4	15.1	13.1	10.7	14.6	13.1	10.7
800JR250-54	19.8	18.0	14.3	18.0	16.3	14.3	18.0	16.3	13.9	18.0	16.3	13.9	17.3	15.7	13.7	15.7	14.3	12.5
800JR250-68	21.3	19.4	15.4	19.4	17.6	15.4	19.4	17.6	15.4	19.4	17.6	15.4	18.6	16.9	14.8	16.9	15.4	13.4
800JR250-97	23.7	21.5	17.1	21.5	19.5	17.1	21.5	19.6	17.1	21.5	19.6	17.1	20.7	18.8	16.4	18.8	17.1	14.9
800JR300-43	18.1	15.7	12.8	17.2	15.6	12.8	15.0	13.0	10.5	15.0	13.0	10.5	15.5	13.4	11.0	15.0	13.4	11.0
800JR300-54	20.2	18.4	16.1	18.4	16.7	14.6	18.4	16.7	14.0	18.4	16.7	14.0	17.7	16.1	14.0	16.1	14.6	12.7
800JR300-68	21.9	19.9	17.4	19.9	18.1	15.8	19.9	18.1	15.8	19.9	18.1	15.8	19.1	17.4	15.2	17.4	15.8	13.8
800JR300-97	24.7	22.4	19.6	22.4	20.4	17.8	22.4	20.4	17.8	22.4	20.4	17.8	21.5	19.6	17.1	19.6	17.8	15.5
100JR200-54	22.4	20.3	17.8	20.3	18.5	16.2	20.4	18.5	15.7	20.4	18.5	15.7	19.6	17.8	15.5	17.8	16.2	14.1
100JR200-68	24.0	21.8	19.1	21.8	19.8	17.3	21.9	19.9	17.3	21.9	19.9	17.3	21.0	19.1	16.7	19.1	17.3	15.1
100JR200-97	26.7	24.2	21.2	24.2	22.0	19.2	24.3	22.0	19.3	24.3	22.0	19.3	23.3	21.2	18.5	21.2	19.2	16.8
100JR250-54	23.3	21.1	18.5	21.1	19.2	16.8	21.2	19.2	15.9	21.2	19.2	15.9	20.3	18.5	16.1	18.5	16.8	14.7
100JR250-68	25.1	22.8	19.9	22.8	20.7	18.1	22.8	20.7	17.9	22.8	20.7	17.9	21.9	19.9	17.4	19.9	18.1	15.8
100JR250-97	27.9	25.4	22.1	25.4	23.30	20.1	25.4	23.1	20.1	25.4	23.1	20.1	24.4	22.1	19.3	22.1	20.1	17.6
100JR300-54	23.8	21.6	18.9	21.6	19.6	17.2	21.6	19.6	13.0	21.6	19.6	16.00	20.8	18.9	16.5	18.9	17.2	15.0
100JR300-68	25.8	23.4	20.5	23.4	21.3	18.6	23.4	21.3	18.2	23.4	21.3	18.2	22.5	20.5	17.9	20.5	18.6	16.2
100JR300-97	29.0	26.4	23.0	26.4	24.0	20.9	26.4	24.0	20.9	26.4	24.0	20.9	25.4	23.0	20.1	23.0	20.9	18.3
120JR200-54	25.7	23.3	20.0	23.3	21.2	18.5	23.3	20.7	13.8	23.3	20.7	13.8	22.4	20.4	14.7	20.4	18.5	14.7
120JR200-68	27.6	25.0	21.9	25.0	22.8	19.9	25.1	22.8	19.9	25.1	22.8	19.9	24.1	21.9	19.1	21.9	19.9	17.4
120JR200-97	30.6	27.8	24.3	27.8	25.3	22.1	27.8	25.3	22.1	27.8	25.3	22.1	26.8	24.3	21.2	24.3	22.1	19.3
120JR250-54	26.7	24.2	20.0	24.2	22.0	19.2	24.2	20.7	13.8	24.2	20.7	13.8	23.3	21.2	14.7	21.2	19.2	14.7
120JR250-68	28.7	26.1	22.8	26.1	23.7	20.7	26.1	23.7	20.1	26.1	23.7	20.1	25.1	22.8	19.9	22.8	20.7	18.1
120JR250-97	32.0	29.0	25.4	29.0	26.4	23.0	29.1	26.4	23.1	29.1	26.4	23.1	27.9	25.4	22.2	25.4	23.0	20.1
120JR300-54	27.2	24.7	20.0	24.7	22.5	19.6	24.7	20.7	13.8	24.7	20.7	13.8	23.8	21.6	14.7	21.6	19.6	14.7
120JR300-68	29.5	26.8	23.4	26.8	24.3	21.3	26.8	24.3	20.3	26.8	24.3	20.3	25.7	23.4	20.4	23.4	21.3	18.6
120JR300-97	33.2	30.2	26.3	30.2	27.4	23.9	30.2	27.4	24.0	30.2	27.4	24.0	29.0	26.3	23.0	26.3	23.9	20.9
140JR200-68	31.9	29.0	25.3	29.0	26.3	23.0	29.0	26.3	23.0	29.0	26.3	23.0	27.9	25.3	22.1	25.3	23.0	20.1
140JR200-97	35.5	32.3	28.2	32.3	29.3	25.6	32.3	29.3	25.6	32.3	29.3	25.6	31.0	28.2	24.6	28.2	25.6	22.4
140JR250-68	33.1	30.1	26.3	30.1	27.3	23.9	30.1	27.3	23.1	30.1	27.3	23.1	28.9	26.3	22.9	26.3	23.9	20.8
140JR250-97	36.9	33.5	29.3	33.5	30.4	26.6	33.5	30.5	26.6	33.5	30.5	26.6	32.2	29.3	25.6	29.3	26.6	23.2
140JR300-68	33.8	30.8	26.9	30.8	27.9	24.4	30.8	27.9	23.4	30.8	27.9	23.4	29.6	26.9	23.5	26.9	24.4	21.3
140JR300-97	38.2	34.7	30.3	34.7	31.5	27.5	34.7	31.5	27.5	27.9	31.5	27.5	33.3	30.3	26.5	30.3	27.5	24.0

Notes:

1. Applications involving multiple spans, cantilevers, concentrated loads, impact loading should be reviewed separately.
2. Web stiffeners are required at all support support and concentrated load locations.
3. Joists shall be restrained against rotation at each end and attached to track components or restrained by the installation of continuous solid blocking.
4. Minimum end bearing shall be 1-1/2".
5. Deflections and stress were calculated w/o regard to composite contribution of facing materials.
6. The compression flange of the section should be braced by the attachment of continuous diaphragm-rated sheathing or decking. Mechanical bridging shall be installed at intervals no to exceed 7' on center. Bridging shall be installed before loading the roof/floor system
7. Calculations were based on the use of the net effective structural properties on page 3 of the JoistRite Technical Guide.
8. Contact Marino\WARE for uniform load capacities of framing components not shown in these tables.
9. Full load capacity used in conjunction with WHI Report 3101528 fire rated assembly.
10. A 30% reduction in load capacity when used with UL 580 is necessary.



For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 12/1/2011
©Copyright 2011 by Ware Industries, Inc. All rights reserved

Marino\WARE® Product Submittal Data

SPAN TABLES	40 PSF Dead Load plus 60 psf Live Load						15 psf Dead Load plus 125 psf Live Load						40 psf dead Load plus 125 psf Live Load					
	L/360			L/480			L/360			L/480			L/360			L/480		
	Single Span			Single Span			Single Span			Single Span			Single Span			Single Span		
	Joist Spacing (in.)o.c.			Joist Spacing (in.)o.c.			Joist Spacing (in.)o.c.			Joist Spacing (in.)o.c.			Joist Spacing (in.)o.c.			Joist Spacing (in.)o.c.		
SECTION ID	12	16	24	12	16	24	12	16	24	12	16	24	12	16	24	12	16	24
800JR200-43	12.7	11.0	8.4	12.7	11.0	8.4	10.7	9.0	6.0	10.7	9.0	6.0	9.8	7.6	5.1	9.8	7.6	5.1
800JR200-54	16.0	14.6	12.3	15.1	13.7	12.0	13.0	11.8	9.4	11.8	10.7	9.4	13.0	11.7	9.5	11.8	10.7	9.4
800JR200-68	17.2	15.6	13.6	16.2	14.7	12.8	13.9	12.7	10.0	12.7	11.5	10.0	13.9	12.7	10.8	12.7	11.5	10.0
800JR200-97	19.1	17.3	15.1	18.0	16.3	14.2	15.5	14.0	11.1	14.0	12.8	11.1	15.5	14.0	12.3	14.0	12.8	11.1
800JR250-43	13.1	11.4	8.4	13.1	11.4	8.4	11.1	9.0	6.0	11.1	9.0	6.0	10.2	7.6	5.1	10.2	7.6	5.1
800JR250-54	16.7	15.2	12.4	15.7	14.3	12.4	13.5	12.3	10.5	12.3	11.2	9.8	13.5	11.8	9.7	12.3	11.2	9.7
800JR250-68	18.0	16.3	14.0	16.9	15.4	13.4	14.6	13.2	11.6	13.2	12.0	10.5	14.6	13.2	10.9	13.2	12.0	10.5
800JR250-97	20.0	18.2	15.9	18.8	17.1	14.9	16.2	14.7	12.9	14.7	13.4	11.7	16.2	14.7	12.9	14.7	13.4	11.7
800JR300-43	13.4	11.6	8.4	13.4	11.6	8.4	11.3	9.0	6.0	11.3	9.0	6.0	10.2	7.6	5.1	10.2	7.6	5.1
800JR300-54	17.1	15.4	12.6	16.1	14.6	12.6	13.8	12.6	10.6	12.6	11.4	10.0	13.8	12.0	9.8	12.6	11.4	9.8
800JR300-68	18.5	16.8	14.2	17.4	15.8	13.8	15.0	13.6	11.9	13.6	12.4	10.8	15.0	13.6	11.1	13.6	12.4	10.8
800JR300-97	20.8	18.9	16.5	19.6	17.8	15.5	16.9	15.3	13.4	15.3	13.9	12.2	16.9	15.3	13.4	15.3	13.9	12.2
100JR200-54	18.9	17.2	13.3	17.8	16.2	13.3	15.3	13.9	9.5	13.9	12.6	9.5	15.3	12.1	8.1	13.9	12.1	8.1
100JR200-68	20.3	18.4	15.9	19.1	17.3	15.2	16.4	14.9	13.0	14.9	13.6	11.9	16.4	14.9	12.4	14.9	13.6	11.9
100JR200-97	22.5	20.5	17.9	21.2	19.3	16.8	18.3	16.6	14.5	16.6	15.1	13.2	18.3	16.6	14.5	16.6	15.1	13.2
100JR250-54	19.6	17.4	13.3	18.5	16.8	13.3	15.9	14.2	9.5	14.5	13.1	9.5	15.6	12.1	8.1	14.5	12.1	8.1
100JR250-68	21.2	19.2	16.0	19.9	18.1	15.8	17.2	15.6	13.5	15.6	14.2	12.4	17.2	15.3	12.5	15.6	14.2	12.4
100JR250-97	23.6	21.4	18.7	22.2	20.1	17.6	19.1	17.3	15.1	17.3	15.8	13.8	19.1	17.3	15.1	17.3	15.8	13.8
100JR300-54	20.1	17.6	13.3	18.9	17.2	13.3	16.3	14.2	9.5	14.8	13.4	9.5	15.8	12.1	8.1	14.8	12.1	8.1
100JR300-68	21.7	19.8	16.3	20.5	18.6	16.2	17.6	16.0	13.7	16.0	14.6	12.7	17.6	15.5	12.7	16.0	14.6	12.7
100JR300-97	24.5	22.3	19.4	23.1	20.9	18.3	19.9	18.0	15.8	18.0	16.4	14.3	19.9	18.0	15.8	18.0	16.4	14.3
120JR200-54	21.7	16.5	11.0	20.4	16.5	11.0	15.7	11.8	7.9	15.7	11.8	7.9	13.4	10.0	6.7	13.4	10.0	6.7
120JR200-68	23.3	21.1	17.9	21.9	19.9	17.4	18.9	17.1	15.0	17.1	15.6	13.6	18.9	17.0	13.4	17.1	15.6	13.4
120JR200-97	25.8	23.5	20.5	24.3	22.1	19.3	20.9	19.0	16.6	19.0	17.3	15.1	20.9	19.0	16.3	19.0	17.3	15.1
120JR250-54	22.0	16.5	11.0	21.2	16.5	11.0	15.7	11.8	7.9	15.7	11.8	7.9	13.4	10.0	6.7	13.4	10.0	6.7
120JR250-68	24.2	22.0	17.9	22.8	20.7	17.9	19.7	17.9	15.2	17.9	16.2	14.2	19.7	17.1	13.4	17.9	16.2	13.4
120JR250-97	27.0	24.5	21.4	25.4	23.1	20.1	21.9	19.9	17.4	19.9	18.0	15.8	21.9	19.9	17.2	19.9	18.0	15.8
120JR300-54	22.0	16.5	11.0	21.6	16.5	11.0	15.7	11.8	7.9	15.7	11.8	7.9	13.4	10.0	6.7	13.4	10.0	6.7
120JR300-68	24.9	22.3	18.2	23.4	21.3	18.2	20.2	18.3	15.4	18.3	16.6	14.5	20.0	17.3	13.4	18.3	16.6	13.4
120JR300-97	28.0	25.5	22.2	26.4	24.0	20.9	22.7	20.6	18.0	20.6	18.7	16.4	22.7	20.6	17.7	20.6	18.7	16.4
140JR200-68	26.9	24.5	18.9	25.3	23.0	18.9	21.8	19.8	13.5	19.8	18.0	13.5	21.8	17.2	11.5	19.8	17.2	11.5
140JR200-97	30.0	27.2	23.8	28.2	25.6	22.4	24.3	22.1	19.3	22.1	20.1	17.5	24.3	22.1	18.8	22.1	20.1	17.5
140JR250-68	27.9	25.3	18.9	26.3	23.9	18.9	22.6	20.3	13.5	20.6	18.7	13.5	22.6	17.2	11.5	20.6	17.2	11.5
140JR250-97	31.1	28.3	24.7	29.3	26.6	23.2	25.2	22.9	20.0	22.9	20.8	18.2	25.2	22.9	19.8	22.9	20.8	18.2
140JR300-68	28.6	25.7	18.9	26.9	24.4	18.9	23.2	20.3	13.5	21.0	19.1	13.5	22.9	17.2	11.5	21.0	17.2	11.5
140JR300-97	32.2	29.2	25.6	30.3	27.5	24.0	26.1	23.7	20.7	23.7	21.5	18.8	26.1	23.7	20.2	23.7	21.5	18.8

Notes:

1. Applications involving multiple spans, cantilevers, concentrated loads, impact loading should be reviewed separately.
2. Web stiffeners are required at all support and concentrated load locations.
3. Joists shall be restrained against rotation at each end and attached to track components or restrained by the installation of continuous solid blocking.
4. Minimum end bearing shall be 1-1/2".
5. Deflections and stress were calculated w/o regard to composite contribution of facing materials.
6. The compression flange of the section should be braced by the attachment of continuous diaphragm-rated sheathing or decking. Mechanical bridging shall be installed at intervals no to exceed 7' on center. Bridging shall be installed before loading the roof/floor system.
7. Calculations were based on the use of the net effective structural properties on page 3 of the JoistRite Technical Guide.
8. Contact Marino\WARE for uniform load capacities of framing components not shown in these tables.
9. Full load capacity used in conjunction with WHI Report 3101528 fire rated assembly.
10. A 30% reduction in load capacity when used with UL 580 is necessary.



www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 12/1/2011
©Copyright 2011 by Ware Industries, Inc. All rights reserved