

Marino\WARE® Product Submittal Data

PRODUCT NAME: 600S137-97

MARINO\WARE PART # 600SC12

05.40.00 Cold-Formed Metal Framing

PROPERTIES:

A. Web (in)	6"	Yield Strength Fy (KSI)	50
B. Flange (in)	1-3/8"	Tensile Strength Fu (KSI)	65
C. Lip (in)	3/8"	Design Thickness (in)	0.1017
Mils	97	Minimum Thickness (in)	0.0966"
Available Finish	G90	Gauge	12

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Cross Sectional Area: A (in ²)	0.889
Weight of Member: (lb/ft)	3.03
Moment of Inertia: Ix (in ⁴)	4.188
Section Modulus: Sx (in ³)	1.396
Radius of Gyration: Rx (in)	2.170
Gross Moment of Inertia: Iy (in ⁴)	0.159
Gross Radius of Gyration: Ry (in)	0.422

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ixe (in ⁴)	4.19
Section Modulus: Sxe (in ³)	1.40
Allowable Bending Moment: Ma (in-k)	50.80*
Allowable strong axis shear away from punch: Vag (lb)	10472
Allowable strong axis shear at punch: Vanet (lb)	3805

* Allowable Bending Moment includes cold work of forming

TORSIONAL SECTION PROPERTIES



St. Venant Torsional Constant: Jx1000 (in ⁴)	3.066
Torsional Warping Constant: Cw (in ⁶)	1.216
Shear Center to Centroid on Principal X-axis: Xo (in)	-0.734
Shear Center to Mid-Plane of the Web: m (in)	0.480
Radius of Gyration on the Centroid Principal axis: Ro (in)	2.330
Torsional Flexural Constant: β 1-(xo/Ro) ²	0.901

CODES & STANDARDS

- AISI S100-12 & ICC ES ESR-4062
- Framing meets ASTM A 1003, A 653, & C 955
- Meets IBC 2015 & 2012, FBC 2014, CSSA code compliant

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information.

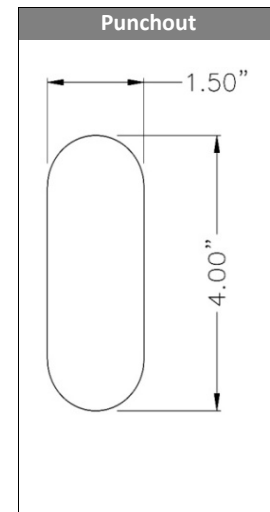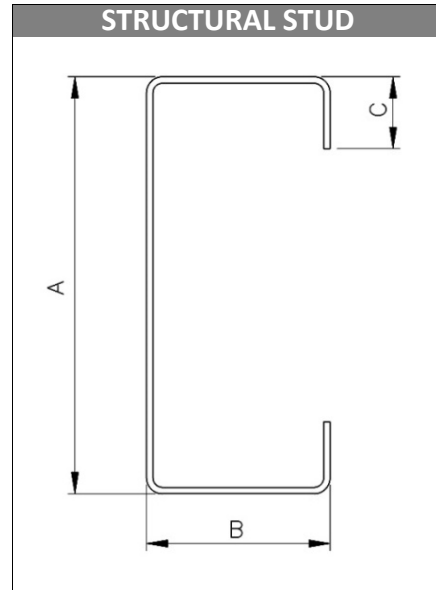

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 1/5/2017 ©Copyright 2017 by Ware Industries, Inc. All rights reserved