

Marino\WARE® Product Submittal Data

MARINO\WARE PART: 6" STUDRITE BLOCKING



StudRite Blocking is pre-cut to fit securely between 6" studs to prevent twisting and rotation. Use StudRite Blocking in lieu of a standard 3 piece blocking detail. Installs with just 4 screws.

MATERIAL: 16 ga (54 mil) 50 ksi

FINISH: Galvanized - G60

INSTALLATION:

- Position the pre-cut StudRite Blocking to fit securely between the studs.
- Use 4 #10 screws to secure the blocking to the stud.
- Designed for 1-5/8" flange 6" studs, other flange sizes up to 3" available vis special order.
- Availabe for 16" on center spacing.
- 10 pieces per carton

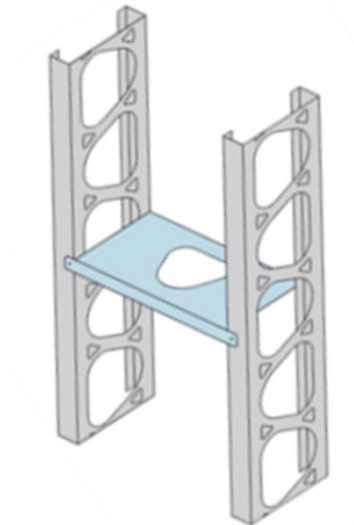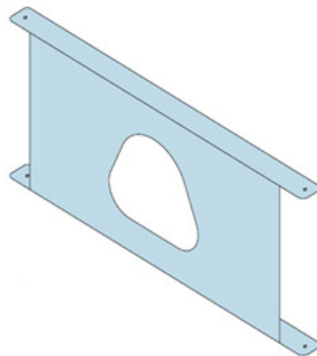

GREEN INFO LEED® v3

Available LEED® points in the following categories:

- MR Credit 2 - Construction Waste Management (1-2 points)
- MR Credit 4 - Recycled Content (1-2 points)
- MR Credit 5 - Regional Materials (1-2 points)

- Total Recycled Content: 36.9%
- Post Consumer Content: 19.8%
- Pre Consumer (Post Industrial) Content: 14.4%



For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 06/1/2016.

© Copyright 2016 by Ware Industries, Inc. All rights reserved