

# Marino\WARE® Product Submittal Data


**PRODUCT NAME:** Tabbed Track

**MARINO\WARE PART #** 400TT20

## PROPERTIES:

A. (in)	4	Yield Strength Fy (KSI)	40
B. (in)	2-1/4	Mils	33
C. (in)	1	Gauge	20 STR
Available Finish	G40, G60	Design Thickness (in)	0.0346
		Minimum Thickness (in)	0.0329

## 09.22.16 Non Structural Metal Framing

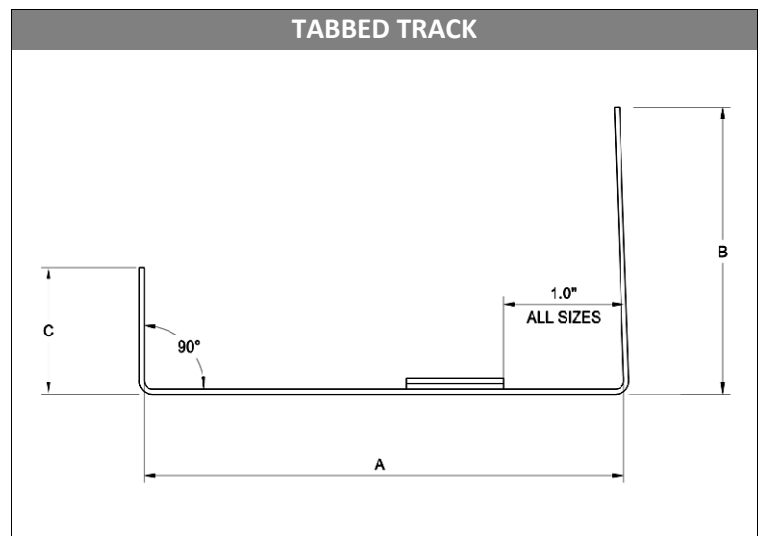

## CODES & STANDARDS

- ASTM C645, E119, E90 & AISI S220 (18 mil - 33 mil)
- Galvanized steel sheet meets ASTM A1003 or A653

## COMMON UL ASSEMBLIES

- U417, U428, U429, U497, U498, U499, V451, V455, V470, V472, V473
- V481, V493, W409, W414, W419, W441, W471, W474, I515, I516

*Note: Always check UL Fire Resistance Directory for complete design requirements*

## GREEN INFO

- LEED v4 credits available
- Contact Technical Services for more information



[www.marinoware.com](http://www.marinoware.com)

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 11/22/2024  
©Copyright 2024 by Ware Industries, Inc. All rights reserved