

Marino\WARE® Product Submittal Data


PRODUCT NAME: Tabbed Track

MARINO\WARE PART # 600TT20

PROPERTIES:

| | | | |
|------------------|----------|-------------------------|--------|
| A. (in) | 6 | Yield Strength Fy (KSI) | 40 |
| B. (in) | 2-1/4 | Mils | 33 |
| C. (in) | 1 | Gauge | 20 STR |
| Available Finish | G40, G60 | Design Thickness (in) | 0.0346 |
| | | Minimum Thickness (in) | 0.0329 |

09.22.16 Non Structural Metal Framing

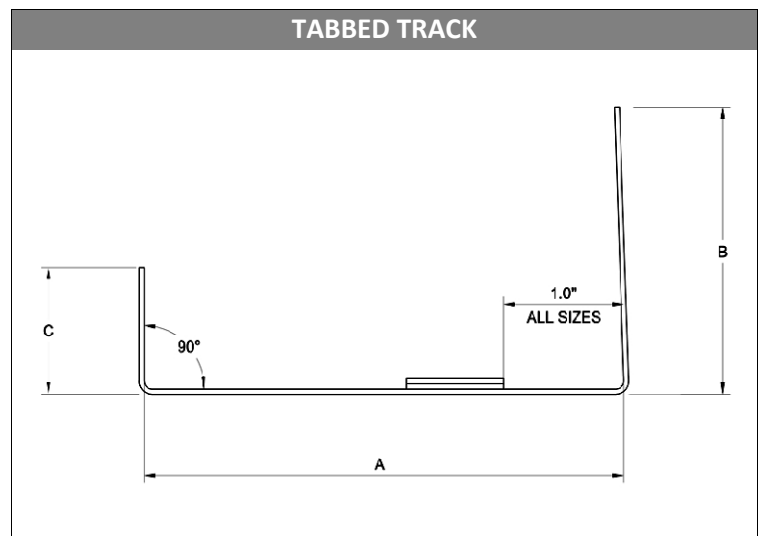

CODES & STANDARDS

- ASTM C645, E119, E90 & AISI S220 (18 mil - 33 mil)
- Galvanized steel sheet meets ASTM A1003 or A653

COMMON UL ASSEMBLIES

- U417, U428, U429, U497, U498, U499, V451, V455, V470, V472, V473
- V481, V493, W409, W414, W419, W441, W471, W474, I515, I516

Note: Always check UL Fire Resistance Directory for complete design requirements

GREEN INFO

- LEED v4 credits available
- Contact Technical Services for more information



For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 11/22/2024
©Copyright 2024 by Ware Industries, Inc. All rights reserved