

Marino\WARE® Product Submittal Data

PRODUCT NAME: Viper20 (600VS125-18)

MARINO\WARE PART #


PROPERTIES:

A. Web (in)	6	Yield Strength Fy (KSI)	70
B. Flange (in)	1-1/4"	Design Thickness (in)	0.0190
C. Lip (in)	0.40	Minimum Thickness (in)	0.0181
Mils	18	Gauge EQ	20 DW
Finish*	G40		

*Or other ASTM A1003 Table 1 Coating



09.22.16 Non-Structural Metal Stud

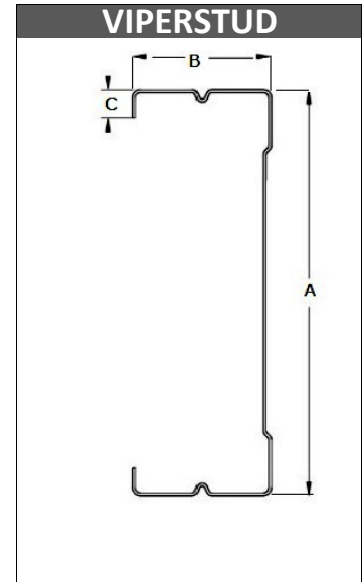

SECTION PROPERTIES

GROSS SECTION PROPERTIES


Weight of Member: (lb/ft)	0.586
Cross Sectional Area: A (in ²)	0.172
Moment of Inertia: Ix (in ⁴)	0.846
Radius of Gyration: Rx (in)	2.216
Gross Moment of Inertia: Iy (in ⁴)	0.032
Gross Radius of Gyration: Ry (in)	0.430

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ix (in ⁴)	0.647
Section Modulus: Sx (in ³)	0.151

MOMENTS

Allowable Bending Moment: Ma (in-k)	5.41
Local Buckling Nominal Moment: Mnl (in-k)	10.56
Distortional Buckling Moment: Mnd (in-k)	9.04



LIMITING HEIGHTS - COMPOSITE (ft-in)

Spacing (in)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	30-6	26-0	23-0	26-7	22-9	20-1	24-2	20-8	18-4
16	27-8	23-7	20-11	24-2	20-8	18-4	22-0	18-9	16-8
24	24-2	20-8	18-4	20-11	18-0	16-0	18-1	16-5	14-7

Composite heights sheathed both sides full height with 5/8" Type X wallboard applied vertically. Acceptable wallboards are 5/8" type X from: USG, National, GP, Temple, American, Continental & CertainTeed

CODES & STANDARDS

- Meets IBC 2009, 2012, 2015 & FBC 2017
- Meets or tested to: ASTM C 645, C 754, E 90, E 119 & AISI S220-11
- Galvanized steel sheet meets ASTM A 1003 & A 653
- Third Party Code Evaluation Report: ICC ES ESR#2620
- Multiple Fire Rated Assemblies

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information



www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545

This technical information reflects the most current information available and supersedes any and all publications, effective 01/30/18.

©Copyright 2018 by Ware Industries, Inc. All rights reserved