

Marino\WARE® Product Submittal Data

PRODUCT NAME: 162VS125-30


MARINO\WARE PART # 158VS30



PROPERTIES:

A. Web (in)	1-5/8	Yield Strength Fy (KSI)	33
B. Flange (in)	1-1/4	Design Thickness (in)	0.0312
C. Lip (in)	1/4"	Minimum Thickness (in)	0.0296
Mils	30	Gauge	20 DW
Finish	G60		

09.22.16 Non-Structural Metal Stud

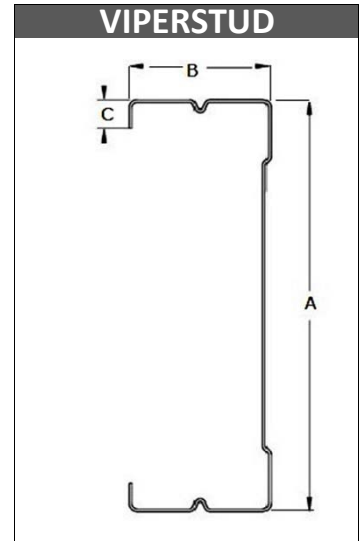

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	0.460
Cross Sectional Area: A (in ²)	0.135
Moment of Inertia: I_x (in ⁴)	0.062
Radius of Gyration: R_x (in)	0.680
Gross Moment of Inertia: I_y (in ⁴)	0.028
Gross Radius of Gyration: R_y (in)	0.455

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: I_x (in ⁴)	0.062
Section Modulus: S_x (in ³)	0.067


MOMENTS

Allowable Bending Moment: Ma (in-k)	1.320
Local Buckling Nominal Moment: Mnl (in-k)	2.210
Distortional Buckling Moment: Mnd (in-k)	2.380

LIMITING HEIGHTS - COMPOSITE (ft-in)

Spacing (in)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	14-7	11-6	10-0	12-9	10-0	8-6	11-7	8-11	-
16	13-3	10-5	8-11	11-7	8-11	-	10-6	7-10	-
24	11-7	8-11	-	10-1	-	-	8-10	-	-

Composite heights sheathed both sides full height with 5/8" Type X gypsum wallboard applied vertically. Acceptable wallboards are 5/8" Type X from USG, National, GP, Temple, American, Continental & CertainTeed.



CODES & STANDARDS

- Meets IBC 2009, 2012, 2015 & FBC 2017
- Meets or tested to: ASTM C 645, C 754, E 90, E 119 & AISI S220-11
- Galvanized steel sheet meets ASTM A 1003 & A 653
- Third Party Code Evaluation Report: ICC ES ESR#2620
- Multiple Fire Rated Assemblies

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information.



For more information, please contact Marino\WARE Technical Services at 866-545-1545

This technical information reflects the most current information available and supersedes any and all publications, effective 1/30/2018.

©Copyright 2018 by Ware Industries, Inc. All rights reserved