

Marino\WARE® Product Submittal Data

PRODUCT NAME: 362VS125-33


MARINO\WARE PART # 358VS33



PROPERTIES:

A. Web (in)	3-5/8	Yield Strength Fy (KSI)	33
B. Flange (in)	1-1/4	Design Thickness (in)	0.0346
C. Lip (in)	1/4"	Minimum Thickness (in)	0.0329
Mils	33	Gauge	20 STR
Finish	G60		

09.22.16 Non-Structural Metal Stud

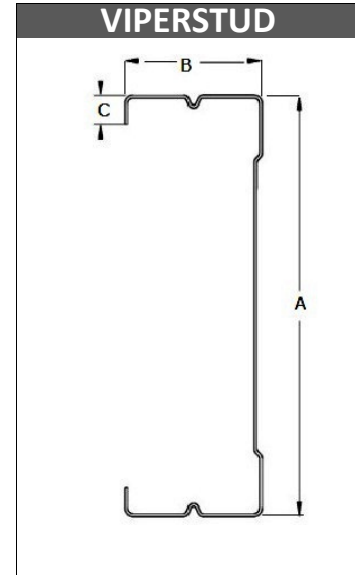

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	0.750
Cross Sectional Area: A (in ²)	0.220
Moment of Inertia: Ix (in ⁴)	0.432
Radius of Gyration: Rx (in)	1.400
Gross Moment of Inertia: Iy (in ⁴)	0.040
Gross Radius of Gyration: Ry (in)	0.429

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ix (in ⁴)	0.428
Section Modulus: Sx (in ³)	0.201

MOMENTS


Allowable Bending Moment: Ma (in-k)	3.960
Local Buckling Nominal Moment: Mnl (in-k)	6.620
Distortional Buckling Moment: Mnd (in-k)	6.750

LIMITING HEIGHTS - COMPOSITE (ft-in)

Spacing (in)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	23-10	18-11	16-6	20-10	16-6	14-5	18-11	15-0	13-1
16	21-8	17-2	15	18-11	15-0	13-1	17-2	13-8	11-10
24	18-11	15	13-1	16-6	13-1	11-4	14-4	11-10	10-3

Composite heights sheathed both sides full height with 5/8" Type X wallboard applied vertically.

Acceptable wallboards are 5/8" type X from: USG, National, GP, Temple, American, Continental & CertainTeed



CODES & STANDARDS

- Meets IBC 2009, 2012, 2015 & FBC 2017
- Meets or tested to: ASTM C 645, C 754, E 90, E 119 & AISI S220-11
- Galvanized steel sheet meets ASTM A 1003 & A 653
- Third Party Code Evaluation Report: ICC ES ESR#2620
- Multiple Fire Rated Assemblies

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information



For more information, please contact Marino\WARE Technical Services at 866-545-1545

This technical information reflects the most current information available and supersedes any and all publications, effective 1/30/2018.

©Copyright 2018 by Ware Industries, Inc. All rights reserved