

# Marino\WARE® Product Submittal Data

**PRODUCT NAME:** 600VS125-33


**MARINO\WARE PART #** 600VS33



**PROPERTIES:**

<b>A. Web (in)</b>	6	<b>Yield Strength Fy (KSI)</b>	33
<b>B. Flange (in)</b>	1-1/4	<b>Design Thickness (in)</b>	0.0346
<b>C. Lip (in)</b>	1/4"	<b>Minimum Thickness (in)</b>	0.0329
<b>Mils</b>	33	<b>Gauge</b>	20 STR
<b>Finish</b>	G60		

09.22.16 Non-Structural Metal Stud

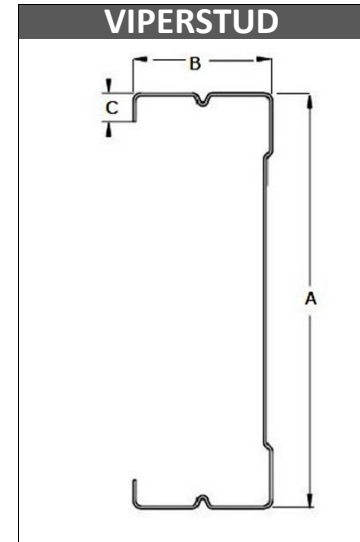

**SECTION PROPERTIES**

**GROSS SECTION PROPERTIES**

Weight of Member: (lb/ft)	0.020
Cross Sectional Area: <b>A</b> (in <sup>2</sup> )	0.301
Moment of Inertia: <b>Ix</b> (in <sup>4</sup> )	1.440
Radius of Gyration: <b>Rx</b> (in)	2.190
Gross Moment of Inertia: <b>Iy</b> (in <sup>4</sup> )	0.046
Gross Radius of Gyration: <b>Ry</b> (in)	0.391

**EFFECTIVE SECTION PROPERTIES**

Moment of Inertia-Deflection: <b>Ix</b> (in <sup>4</sup> )	1.390
Section Modulus: <b>Sx</b> (in <sup>3</sup> )	0.400

**MOMENTS**


Allowable Bending Moment: <b>Ma</b> (in-k)	6.930
Local Buckling Nominal Moment: <b>Mnl</b> (in-k)	13.20
Distortional Buckling Moment: <b>Mnd</b> (in-k)	11.60

**LIMITING HEIGHTS - COMPOSITE (ft-in)**

Spacing (in)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	34-5	27-7	24-1	28-1	24-1	21-1	24-4	21-11	19-2
16	29-10	25-1	21-11	24-4	21-11	19-2	21-1	19-11	17-5
24	24-4	21-11	19-2	19-11	19-2	16-9	17-3	17-3	15-3

Composite heights sheathed both sides full height with 5/8" Type X wallboard applied vertically.

Acceptable wallboards are 5/8" type X from: USG, National, GP, Temple, American, Continental & CertainTeed



**CODES & STANDARDS**

- Meets IBC 2009, 2012, 2015 & FBC 2017
- Meets or tested to: ASTM C 645, C 754, E 90, E 119 & AISI S220-11
- Galvanized steel sheet meets ASTM A 1003 & A 653
- Third Party Code Evaluation Report: ICC ES ESR#2620
- Multiple Fire Rated Assemblies

**GREEN INFO**

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information



www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545

This technical information reflects the most current information available and supersedes any and all publications, effective 1/30/2018.

©Copyright 2018 by Ware Industries, Inc. All rights reserved