


**Member Designator**    **150A150-30**

Coating                      G40EQ

**Physical Properties**

Design Thickness            0.0312 in  
 Mil                              30 mil  
 Gauge                         20 Gauge  
 Leg Length                  1.50 in  
 Yield Strength                33 ksi  
 Weight Per Foot             0.306 lb/ft

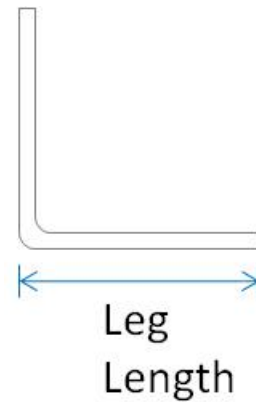

| Leg Length      | Thickness (mils) | Gauge | Length                |
|-----------------|------------------|-------|-----------------------|
| 7/8" x 1-3/8"   | 18               | 25    | 10' or custom lengths |
|                 | 27               | 22    |                       |
|                 | 30               | 20    |                       |
| 1-1/2" x 1-1/2" | 18               | 25    |                       |
|                 | 27               | 22    |                       |
|                 | 30               | 20    |                       |
|                 | 43               | 18    |                       |
| 2" x 2"         | 54               | 16    |                       |
|                 | 18               | 25    |                       |
|                 | 27               | 22    |                       |
|                 | 30               | 20    |                       |
| 3" x 3"         | 43               | 18    |                       |
|                 | 54               | 16    |                       |
|                 | 68               | 14    |                       |
|                 | 18               | 25    |                       |
| 3" x 3"         | 27               | 22    |                       |
|                 | 30               | 20    |                       |
|                 | 43               | 18    |                       |
|                 | 54               | 16    |                       |
|                 | 68               | 14    |                       |

**General Notes**

1. Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
2. Drywall framing members have a protective coating conforming to ASTM spec A 653/A 653M, G-40 min, or equivalent corrosion resistance.
3. Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
4. Drywall framing members are marked with product information per the requirements of ASTM C 645 section 14.
5. All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.
6. Drywall framing [nonstructural 25 gauge, 22 gauge and 20 gauge] is not permitted in load bearing (i.e. axial load greater than 200 lbs.) or exterior applications (i.e. transverse load greater than 10 PSF). Reference ASTM C 645 section 3.2.2.

**LEED Green Building Credits**

MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.  
 MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.  
 MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.