


**Member Designator**     **150CC325-54**


Coating                             G90

### Physical Properties

Design Thickness                0.0566 in  
 Mil                                    54 mil  
 Gauge                                16 Gauge  
 Leg 1 Length                      1.50 in  
 Leg 2 Length                      1.50 in  
 Total Length                      3.25 in  
 Yield Strength                    50 ksi  
 Weight                               0.156 lb

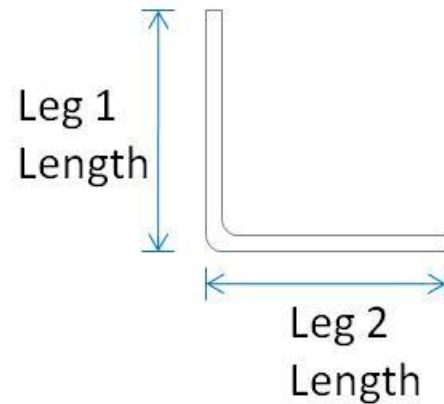

Clip	Number of Screws	Allowable Loads	
		F1 (lbs)	M1 (lbs-in)
150CC325-54	4	156	444
150CC525-54	4	252	444

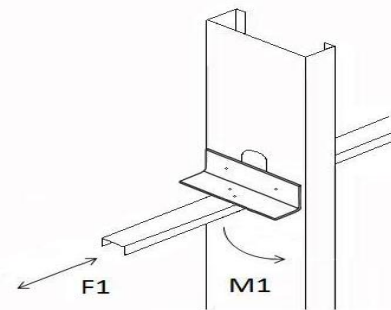

### Allowable Loads Table Notes

1. Attachment to bridging and studs using #10-16 screws through the four pre-punched holes
2. Bridging member thickness assumed to be 16 gage minimum,  $F_y=50$  ksi
3. Allowable M1 loads are based on bridging clip and bridging-to-clip connection strength only
4. Strength of F1 and M1 connection to stud must be determined by design engineer
5. Allowable loads have not been increased for wind or seismic

### General Notes

1. Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
2. All structural framing members have a protective coating conforming to ASTM C 955.
3. Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
4. Stud/joists are manufactured to custom lengths. Stud/joists are manufactured with punched webs unless otherwise specified at time of order.
5. Track is produced in standard lengths of 10 feet unless a custom track length is indicated. Track is manufactured with unpunched webs.
6. Structural framing members are marked with product information per the requirements of ASTM C 955 section 12.
7. All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.

### LEED Green Building Credits

- MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.  
 MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.  
 MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.