


Member Designator 600PT150-15

Coating G40 EQ

Physical Properties

Design Thickness 0.0158 in
 Mil 15 mil
 Gauge 25 Gauge
 Web Width 6.00 in
 Flange Width 1.50 in
 Yield Strength 50 ksi

Note : Web depth to thickness ratio exceeds 260, web stiffeners are required at bearing locations and intermediate locations in non-composite conditions

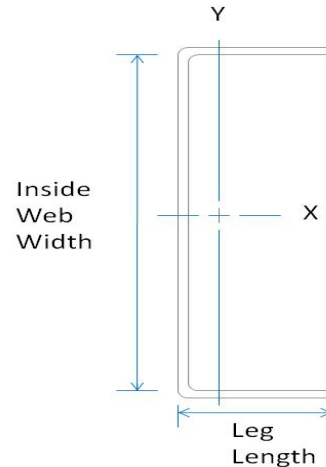

Gross Properties

Gross Properties						
Area (in ²)	Weight (lb/ft)	Ix (in ⁴)	Sx (in ³)	Rx (in)	Iy (in ⁴)	Ry (in)
0.142	0.484	0.719	0.237	2.249	0.026	0.430

Effective Properties

Effective Properties			
Ae (in ²)	Ixe (in ⁴)	Sxe (in ³)	Ma (in-lbs)
0.021	0.363	0.059	1774

Torsional Properties

Torsional				
J ^{x1000} (in ⁴)	Cw (in ⁶)	Xo (in)	Ro (in)	β
0.012	0.177	-0.692	2.392	0.916

General Notes

1. Physical properties and load tables have been calculated based on AISI S100-07, NASPEC for Design of Cold-Formed Steel Structural Members.
2. Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI A7.2.
3. Allowable moment includes cold-work of forming.
4. Tabulated gross properties, including torsional properties, are based on full-unreduced cross section of the studs (away from punchouts) & tracks.
5. Allowable moment is taken as the lowest value based on local or distortional buckling. Distortional buckling strength is based on a k-phi = 0.
6. Drywall framing members have a protective coating conforming to ASTM spec A 653/A 653M, G-40 min, or equivalent corrosion resistance.
7. Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
8. Drywall framing members are marked with product information per the requirements of ASTM C 645 section 14.
9. All delivered material must be kept dry. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.
10. Drywall framing [nonstructural 25 gauge, 22 gauge and 20 gauge] is not permitted in load bearing (i.e. axial load greater than 200 lbs.) or exterior applications (i.e. transverse load greater than 10 PSF). Reference ASTM C 645 section 3.2.2.

LEED Green Building Credits

MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.
 MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.
 MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.