


**Member Designator**     **350PT125-15**

Coating                             G40 EQ

## Physical Properties

Design Thickness             0.0158 in  
 Mil                                     15 mil  
 Gauge                                25 Gauge  
 Web Width                         3.50 in  
 Flange Width                     1.25 in  
 Yield Strength                    50 ksi

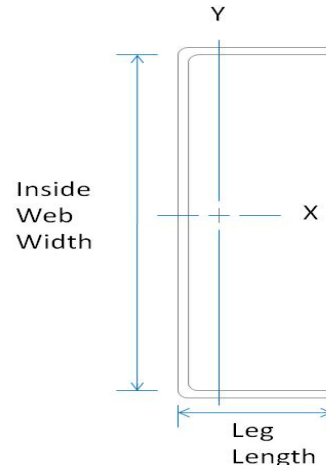

## Gross Properties

| Gross Properties           |                   |                                      |                                      |                        |                                      |                        |
|----------------------------|-------------------|--------------------------------------|--------------------------------------|------------------------|--------------------------------------|------------------------|
| Area<br>(in <sup>2</sup> ) | Weight<br>(lb/ft) | I <sub>x</sub><br>(in <sup>4</sup> ) | S <sub>x</sub><br>(in <sup>3</sup> ) | R <sub>x</sub><br>(in) | I <sub>y</sub><br>(in <sup>4</sup> ) | R <sub>y</sub><br>(in) |
| 0.095                      | 0.323             | 0.181                                | 0.101                                | 1.383                  | 0.014                                | 0.383                  |

## Effective Properties

| Effective Properties                 |                                       |                                       |                            |
|--------------------------------------|---------------------------------------|---------------------------------------|----------------------------|
| A <sub>e</sub><br>(in <sup>2</sup> ) | I <sub>xe</sub><br>(in <sup>4</sup> ) | S <sub>xe</sub><br>(in <sup>3</sup> ) | M <sub>a</sub><br>(in-lbs) |
| 0.021                                | 0.116                                 | 0.034                                 | 1022                       |

## Torsional Properties

| Torsional                                |                                      |                        |                        |       |
|--|--------------------------------------|------------------------|------------------------|-------|
| J <sup>x1000</sup><br>(in <sup>4</sup> ) | C <sub>w</sub><br>(in <sup>6</sup> ) | X <sub>o</sub><br>(in) | R <sub>o</sub><br>(in) | β     |
| 0.008                                    | 0.031                                | -0.678                 | 1.587                  | 0.818 |

## General Notes

- Physical properties and load tables have been calculated based on AISI S100-07, NASPEC for Design of Cold-Formed Steel Structural Members.
- Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI A7.2.
- Allowable moment includes cold-work of forming.
- Tabulated gross properties, including torsional properties, are based on full-unreduced cross section of the studs (away from punchouts) & tracks.
- Allowable moment is taken as the lowest value based on local or distortional buckling. Distortional buckling strength is based on a k-phi = 0.
- Drywall framing members have a protective coating conforming to ASTM spec A 653/A 653M, G-40 min, or equivalent corrosion resistance.
- Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
- Drywall framing members are marked with product information per the requirements of ASTM C 645 section 14.
- All delivered material must be kept dry. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.
- Drywall framing [nonstructural 25 gauge, 22 gauge and 20 gauge] is not permitted in load bearing (i.e. axial load greater than 200 lbs.) or exterior applications (i.e. transverse load greater than 10 PSF). Reference ASTM C 645 section 3.2.2.

## LEED Green Building Credits

- MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.  
 MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.  
 MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.