


Sales: (888)248-8076 Fax: (847)680-7883 www.mbastuds.com

## Submittal Data – Structural Track

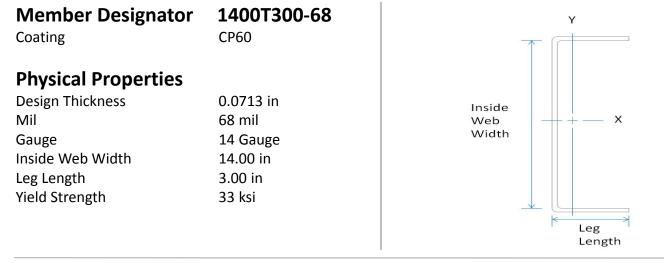

Gross Properties							
Area	Weight	Ix	Sx	Rx	ly	Ry	
(in <sup>2</sup> )	(lb/ft)	(in <sup>4</sup> )	(in <sup>3</sup> )	(in)	(in <sup>4</sup> )	(in)	
1.425	4.85	37.737	5.297	5.146	0.963	0.822	

### **Gross Properties**

	si)				
Ixe		Sxe	Ma	Vag	
	(in <sup>4</sup> )	(in <sup>3</sup> )	(in-k)	(lb)	
	31.693	2.961	58.50	232	

# Torsional Properties

**Effective Properties** 

Torsional						
J <sup>×1000</sup>	Cw	Хо	m	Ro	β	
(in <sup>4</sup> )	(in <sup>6</sup> )	(in)	(in)	(in)		
2.415	36.257	-1.265	0.825	5.363	0.944	

#### **General Notes**

- 1. Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
- 2. Drywall framing members have a protective coating conforming to ASTM spec A 653/A 653M, G-40 min, or equivalent corrosion resistance.
- 3. Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
- 4. Drywall framing members are marked with product information per the requirements of ASTM C 645 section 14.
- 5. All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.
- 6. Drywall framing [nonstructural 25 gauge, 22 gauge and 20 gauge] is not permitted in load bearing (i.e. axial load greater than 200 lbs.) or exterior applications (i.e. transverse load greater than 10 PSF). Reference ASTM C 645 section 3.2.2.

### **LEED Green Building Credits**

MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.

MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content. MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.

