


## Member Designator **800S137-54**

Coating **CP60**

## Physical Properties

Design Thickness **0.0566 in**  
 Mil **54 mil**  
 Gauge **16 Gauge**  
 Web Width **8.00 in**  
 Flange Width **1.375 in**  
 Stiffening Lip **0.375 in**  
 Yield Strength **50 ksi**

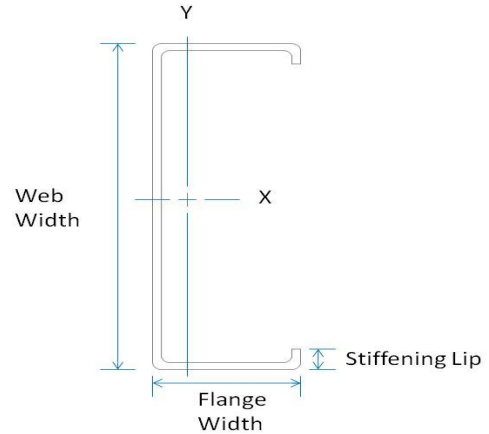

## Gross Properties


Area (in <sup>2</sup> )	Weight (lb/ft)	I <sub>x</sub> (in <sup>4</sup> )	S <sub>x</sub> (in <sup>3</sup> )	R <sub>x</sub> (in)	I <sub>y</sub> (in <sup>4</sup> )	R <sub>y</sub> (in)
0.627	2.13	5.110	1.277	2.855	0.112	0.423

## Effective Properties

I <sub>xx</sub> (in <sup>4</sup> )	S <sub>xx</sub> (in <sup>3</sup> )	M <sub>a</sub> (in-k)	V <sub>ag</sub> (lb)
4.974	1.083	32.42	2091

## Torsional Properties

J <sup>x1000</sup> (in <sup>4</sup> )	C <sub>w</sub> (in <sup>6</sup> )	X <sub>o</sub> (in)	m (in)	R <sub>o</sub> (in)	β
0.670	1.478	-0.676	0.448	2.964	0.948

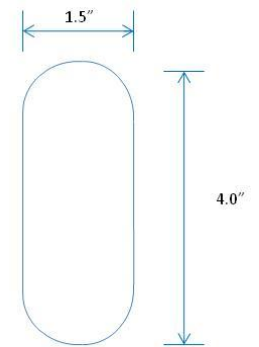

Structural Punch

## Limiting Wall Heights – Curtain Wall

Section	Spacing (in) o.c.	5 psf			15 psf			20 psf			25 psf		
		L/120	L/240	L/360	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
800S137-54	12	51' 2"	42' 7"	35' 5"	28' 1"	24' 7"	20' 8"	25' 7"	22' 4"	18' 10"	23' 9"	20' 8"	17' 6"
800S137-54	16	46' 5"	38' 10"	32' 2"	25' 7"	22' 4"	18' 10"	23' 2"	20' 3"	17' 1"	21' 6"	18' 10"	15' 10"
800S137-54	24	40' 7"	33' 2"	28' 1"	22' 4"	19' 6"	16' 5"	20' 3"	17' 8"	14' 11"	18' 10"	16' 5"	13' 10"

Section	Spacing (in) o.c.	30 psf			35 psf			40 psf			50 psf		
		L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
800S137-54	12	22' 4"	19' 6"	16' 5"	21' 2"	18' 6"	15' 7"	20' 3"	17' 8"	14' 11"	18' 10"	16' 5"	13' 10"
800S137-54	16	20' 3"	17' 8"	14' 11"	19' 3"	16' 10"	14' 2"	18' 5"	16' 1"	13' 7"	17' 1"	14' 11"	12' 7"
800S137-54	24	17' 8"	15' 5"	13' 0"	16' 10"	14' 8"	12' 4"	16' 1"	14' 0"	11' 10"	14' 11"	13' 0"	11' 0"

## General Notes

- Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
- All structural framing members have a protective coating conforming to ASTM C 955.
- Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
- Stud/joists are manufactured to custom lengths. Stud/joists are manufactured with punched webs unless otherwise specified at time of order.
- Track is produced in standard lengths of 10 feet unless a custom track length is indicated. Track is manufactured with unpunched webs.
- Structural framing members are marked with product information per the requirements of ASTM C 955 section 12.
- All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.

## LEED Green Building Credits

MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.

MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.

MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.