


Member Designator **925T300-54**

Coating **CP60**

Physical Properties

Design Thickness **0.0566 in**
 Mil **54 mil**
 Gauge **16 Gauge**
 Inside Web Width **9.25 in**
 Leg Length **3.00 in**
 Yield Strength **33 ksi**

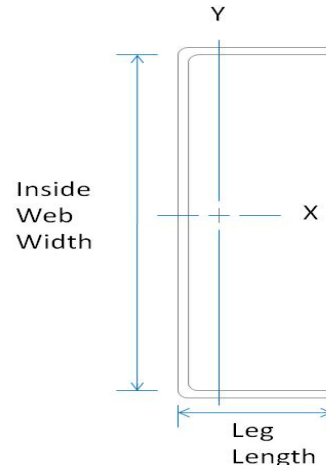

Gross Properties

Gross Properties						
Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)
0.863	2.93	11.202	2.371	3.604	0.700	0.901

Effective Properties

Effective Properties (33ksi)			
I _{xe} (in ⁴)	S _{xe} (in ³)	M _a (in-k)	V _{ag} (lb)
9.276	1.349	26.66	1761

Torsional Properties

Torsional					
J ^{x1000} (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β
0.921	11.109	-1.553	0.973	4.026	0.851

General Notes

- Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
- All structural framing members have a protective coating conforming to ASTM C 955.
- Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
- Stud/joists are manufactured to custom lengths. Stud/joists are manufactured with punched webs unless otherwise specified at time of order.
- Track is produced in standard lengths of 10 feet unless a custom track length is indicated. Track is manufactured with unpunched webs.
- Structural framing members are marked with product information per the requirements of ASTM C 955 section 12.
- All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.

LEED Green Building Credits

- MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.
 MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.
 MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.