


Member Designator 1400T200-43

Coating CP60

Physical Properties

Design Thickness 0.0451 in
 Mil 43 mil
 Gauge 18 Gauge
 Inside Web Width 14.00 in
 Leg Length 2.00 in
 Yield Strength 33 ksi

Note : Web depth to thickness ratio exceeds 260, effective section properties not calculated.

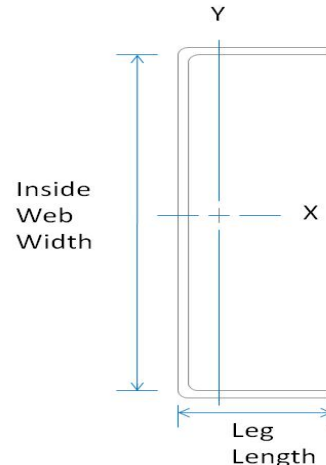

Gross Properties

Gross Properties						
Area (in ²)	Weight (lb/ft)	Ix (in ⁴)	Sx (in ³)	Rx (in)	Iy (in ⁴)	Ry (in)
0.811	2.76	19.276	2.722	4.874	0.194	0.489

Torsional Properties

Torsional					
J ^{x1000} (in ⁴)	Cw (in ⁶)	Xo (in)	m (in)	Ro (in)	β
0.550	7.615	-0.669	0.452	4.944	0.982

General Notes

- Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
- All structural framing members have a protective coating conforming to ASTM C 955.
- Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
- Stud/joists are manufactured to custom lengths. Stud/joists are manufactured with punched webs unless otherwise specified at time of order.
- Track is produced in standard lengths of 10 feet unless a custom track length is indicated. Track is manufactured with unpunched webs.
- Structural framing members are marked with product information per the requirements of ASTM C 955 section 12.
- All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.

LEED Green Building Credits

MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.
 MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.
 MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.