


## Member Designator **362T300-33**

Coating CP60

### Physical Properties

Design Thickness 0.0346 in  
 Mil 33 mil  
 Gauge 20 Gauge  
 Inside Web Width 3.625 in  
 Leg Length 3.00 in  
 Yield Strength 33 ksi

*Note: Flange width-to-thickness ratio exceeds 60. Effective section properties not calculated.*

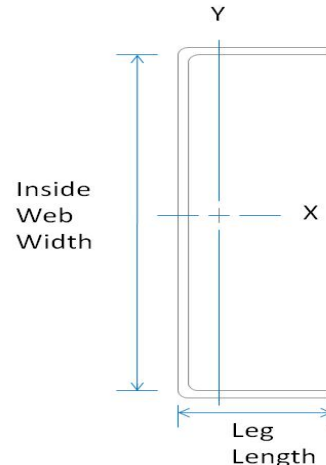

## Gross Properties

| Gross Properties           |                   |                                      |                                      |                        |                                      |                        |
|----------------------------|-------------------|--------------------------------------|--------------------------------------|------------------------|--------------------------------------|------------------------|
| Area<br>(in <sup>2</sup> ) | Weight<br>(lb/ft) | I <sub>x</sub><br>(in <sup>4</sup> ) | S <sub>x</sub><br>(in <sup>3</sup> ) | R <sub>x</sub><br>(in) | I <sub>y</sub><br>(in <sup>4</sup> ) | R <sub>y</sub><br>(in) |
| 0.333                      | 1.13              | 0.850                                | 0.454                                | 1.598                  | 0.327                                | 0.992                  |

## Torsional Properties

| Torsional                                |                                      |                        |           |                        |       |
|--|--------------------------------------|------------------------|-----------|------------------------|-------|
| J <sup>x1000</sup><br>(in <sup>4</sup> ) | C <sub>w</sub><br>(in <sup>6</sup> ) | X <sub>o</sub><br>(in) | m<br>(in) | R <sub>o</sub><br>(in) | β     |
| 0.133                                    | 0.797                                | -2.160                 | 1.235     | 2.865                  | 0.431 |

## General Notes

- Physical properties and load tables have been calculated in conformance with the 2001 NASPEC for the Design of Cold-Formed Steel Structural Members, including the 2004 Supplement, and the IBC 2006, unless noted otherwise.
- All structural framing members have a protective coating conforming to ASTM C 955.
- Reference ASTM specification A 1003/A 1003 M table 1 for the universe of allowable coatings for light gauge steel framing.
- Stud/joists are manufactured to custom lengths. Stud/joists are manufactured with punched webs unless otherwise specified at time of order.
- Track is produced in standard lengths of 10 feet unless a custom track length is indicated. Track is manufactured with unpunched webs.
- Structural framing members are marked with product information per the requirements of ASTM C 955 section 12.
- All delivered material must be kept dry, preferably by being stored inside a building under a roof. If it is necessary to store material outside, it must be stacked off the ground, properly supported on a level platform, and fully protected from the weather. Reference ASTM C 754 section 8 and ASTM C 1007 section 4.

## LEED Green Building Credits

MR Credit 2: Construction Waste Management – MBA steel framing is 100% recyclable.

MR Credit 4: Recycled Content – MBA steel framing is formed from no less than 25.5% post-consumer and 6.8% pre-consumer recycled content.

MR Credit 5: Regional Materials – MBA has manufacturing facilities in multiple states.