



Residence, Campobello, SC

- Architectural Concealed Direct Fastened Integral Standing Rib Roof Panel
- Image: 12" Panel Coverage
- Water Shedding Panel
- Image II: 12" or 16" Panel Coverage
- 1" Rib Height
- Gauges: 29 GA and 26 GA Standard
- Minimum Roof Slope: 3 :12
- Applies Over Plywood Substrate with 30 Pound Felt Underlayment
- Available Finish: MS Colorfast 25® and Acrylic Coated Galvalume®

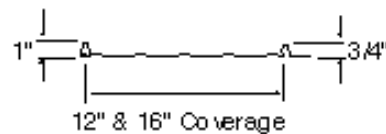
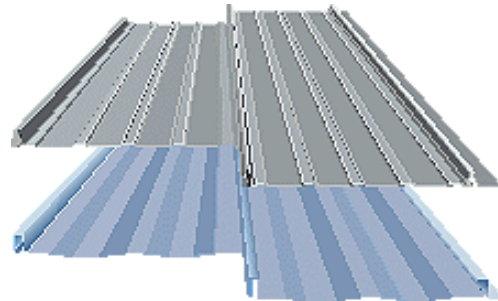


IMAGE I




IMAGE II

Testing:

- 1) UL 2218, Class 4 Impact Resistance
- 2) UL 790, Class A Fire Resistance Rating
- 3) Contact Metal Sales Technical Services for loading information.