





Office Building, Jacksonville, Florida

- Structural Trapezoidal Standing Seam Panel
- 24" Panel Coverage
- 2-11/16" Rib Height
- Gauges: 24 GA Standard and 22 GA Optional
- Minimum Roof Slope: 1/4 : 12
- Factory Applied Side Lap Sealant
- Pittsburgh Double Flat Locking Mechanically Seamed Side Lap
- Concealed Clip Designed to Accommodate 1/2" to 6" Blanket Insulation
- Concealed Clip Designed to Accommodate Movement Due to Temperature Change
- Applies Over Open Framing or Solid Substrate
- Available Finishes Include Kynar 500 (PVF2), Kynar 500 (PVDF), MS Colorfast 25®, and Acrylic Coated Galvalume®

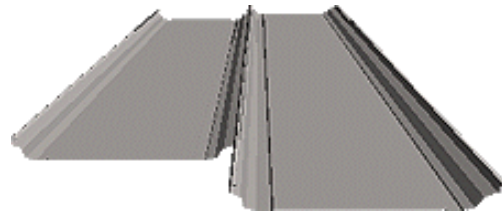

Refer to the Load Tables

Testing:

1. UL 263, Fire Resistance Rating
2. UL 2218 Class 4 Impact Resistance
3. UL-790, Class A Fire Resistance Rating
4. ASTM E-283 Air Infiltration
5. ASTM E-331 Water Penetration
6. UL 580, Class 90 Wind Uplift, Construction Number 197, 197A
7. CEGS-07416 US Army Corps of Engineers Rated-ASTM E-1592