




Office Building, Duquesne, PA

- Structural Trapezoidal Standing Seam Panel
- 24" Panel Coverage
- 3" Rib Height
- Gauges: 24 GA Standard and 22 GA Optional
- Minimum Roof Slope: 1/4 : 12
- Factory Applied Side Lap Sealant
- Panels Snap Together at Side Lap
- Concealed Clip Designed to Accommodate 1/2" to 6" Blanket Insulation
- Concealed Clip Designed to Accommodate Movement Due to Temperature Change
- Applies Over Open Framing or Solid Substrate
- Available Finishes Include Kynar 500 (PVF2) and Acrylic Coated Galvalume®

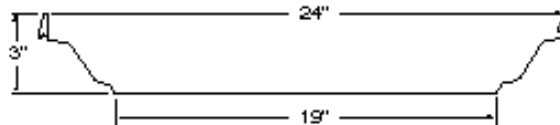

Refer to the Load Tables

Testing:

- 1 ASTM E-1680 Air Penetration
- 2 ASTM E-1646 Water Infiltration
- 3 UL 580, Class 90 Uplift, Construction number 240
- 4 ASTM E-330, Uniform Static Air Pressure Difference
- 5 CEGS-07416 US Army Corps of Engineers Rated-ASTM E-1592