


# SOFFIT PANEL

Condensed  
Technical  
Reference

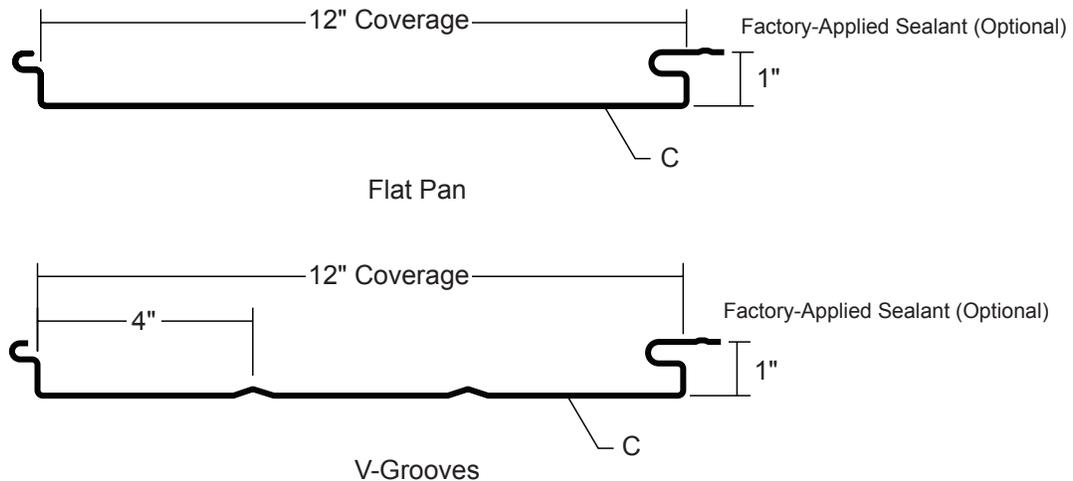

ARCHITECTURAL  
COMMERCIAL  
INDUSTRIAL  
PANEL

CONCEALED  
FASTENED


12"  
COVERAGE

SOFFIT, FASCIA,  
WALL OR LINER  
APPLICATIONS

OPEN FRAMING OR  
SOLID SUBSTRATE

## PANEL OVERVIEW

- ▶ Finishes: Standard: PVDF, MS Colorfast45<sup>®</sup> and Acrylic-Coated Galvalume<sup>®</sup>
- ▶ Corrosion Protection: AZ55 per ASTM A 792 for unpainted Galvalume<sup>®</sup>  
AZ50 per ASTM A 792 for painted Galvalume<sup>®</sup>  
G90 per ASTM A 653 for Galvanized
- ▶ Gauges: 26 ga and 24 ga and 22 ga
- ▶ 12" panel coverage, 1" panel depth
- ▶ Panel Length: 26 ga: 5' maximum and 5' minimum  
24 ga: 20' maximum and 5' minimum  
22 ga: 20' maximum and 5' minimum
- ▶ Applies over open framing or solid substrate
- ▶ Concealed, direct fastened panel for soffit, fascia, wall and liner applications
- ▶ Panels can be installed horizontally or vertically
- ▶ Tongue-and-groove sidelap

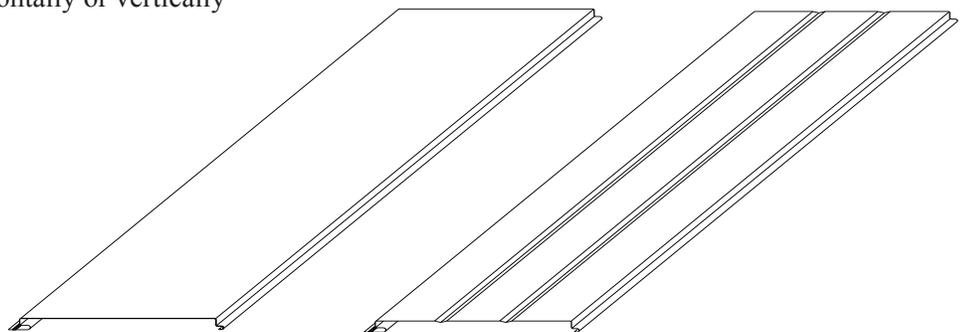

## TESTING AND APPROVALS


- ▶ UL 263 Fire Resistance Rating - per assembly
- ▶ ASTM E 283 Air Leakage - 0.25 cfm/ft<sup>2</sup> at 6.24 psf
- ▶ ASTM E 331 Water Penetration - none at 12 psf
- ▶ ASTM E 330 Structural Performance
- ▶ 2020 FBC Approval - FL9482.5 and FL40263.1

MS Metal Sales<sup>™</sup>


# SOFFIT PANEL

**Condensed  
Technical  
Reference**

## SIDELAP FASTENING DETAIL

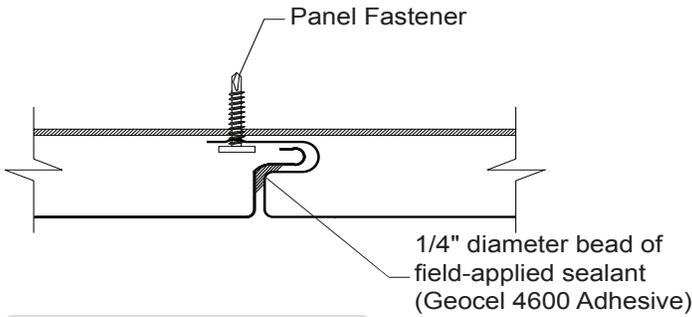

## SIDELAP INSTALLATION

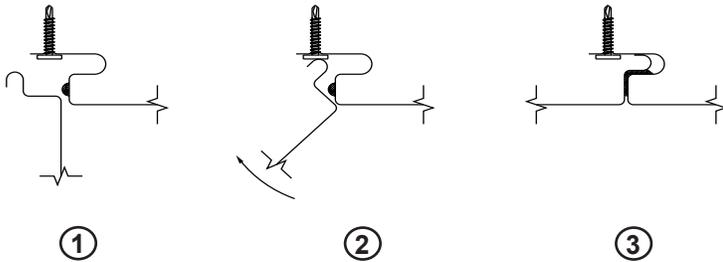

## VERTICAL DIRECTIONAL DETAILS

Left to Right Installation



Right to Left Installation



## FASTENER INFORMATION

Overdriven fasteners will cause panel distortions.

Fasteners should extend 1/2" or more past the inside face of the support material.

Thick panels (ex. 18 ga) or supports (ex. 1/2" steel) may require predrilling of holes for screws.

Panel Fasteners:

Attaching to Wood:

#10-12 Pancake Head Wood Screw

Attaching to Steel:

≤12 ga: #10-16 Pancake Head Drillers

Trim Fasteners:

1/4"-14 x 7/8" XL Stitch Screw

1/8" x 3/16" Pop Rivet

Field-Applied Sealant:

1/4" bead of Geocel 4600

Panels must be engaged before sealant has cured.

## HORIZONTAL DIRECTIONAL DETAIL

Top to Bottom Installation



## SECTION PROPERTIES

## ALLOWABLE UNIFORM LOADS, psf For various fastener spacings

Ga	Width in	Yield ksi	Weight psf	Top In Compression		Bottom In Compression		Inward Load					Outward Load						
				I <sub>xx</sub> in <sup>4</sup> /ft	S <sub>xx</sub> in <sup>3</sup> /ft	I <sub>xx</sub> in <sup>4</sup> /ft	S <sub>xx</sub> in <sup>3</sup> /ft	2'	2.5'	3'	3.5'	4'	5'	2'	2.5'	3'	3.5'	4'	5'
26	12	50	0.94	0.0130	0.0226	0.0290	0.0339	144	100	74	55	42	27	-	-	-	-	-	-
24	12	50	1.23	0.0189	0.0338	0.0410	0.0480	178	129	97	75	60	40	55	55	55	55	55	-
22	12	50	1.62	0.0278	0.0520	0.0560	0.0651	234	170	129	100	80	54	55	55	55	55	55	-

- Theoretical section properties have been calculated per AISI 2016 'North American Specification for the Design of Cold-Formed Steel Structural Members'. I<sub>xx</sub> and S<sub>xx</sub> are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2016 specifications considering bending, shear, combined bending & shear and deflection. Allowable load does not address web crippling, fasteners, support material or load testing. Allowable load considers the three or more equal spans condition. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase for wind.

**MS Metal Sales™**

[metalsales.us.com](http://metalsales.us.com)

Anchorage, AK 866.640.7663  
Bay City, MI 888.777.7640  
Deer Lake, PA 800.544.2577  
Denver, CO 800.289.7663

Detroit Lakes, MN 888.594.1394  
Fontana, CA 800.782.7953  
Fort Smith, AR 877.452.3915  
Independence, MO 800.747.0012

Jacksonville, FL 800.394.4419  
Jefferson, OH 800.321.5833  
Mocksville, NC 800.228.6119  
Nashville, TN 800.251.8508  
Rock Island, IL 800.747.1206  
Rogers, MN 800.328.9316

Seattle, WA 800.431.3470  
Sellersburg, IN 800.999.7777  
Sioux Falls, SD 888.299.0024  
Spokane, WA 800.572.6565  
Temple, TX 800.543.4415  
Woodland, CA 800.759.6019

©MSMC/3-2023