


# TLC-13 WALL PANEL

**Condensed  
Technical  
Reference**

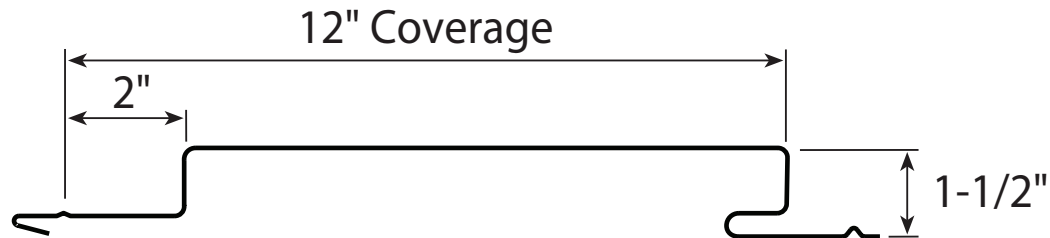

**ARCHITECTURAL  
COMMERCIAL  
INDUSTRIAL  
PANEL**

**CONCEALED  
FASTENED**

**12"  
COVERAGE**

**SOFFIT, FASCIA,  
WALL AND LINER  
PANEL**


**OPEN FRAMING OR  
SOLID SUBSTRATE**

## PANEL OVERVIEW

- ▶ Finish: Standard: PVDF  
Optional: multi-pass Kynar 500®, Marblique, Plastisol and Polyester
- ▶ Corrosion Protection: AZ50 per ASTM A 792 for painted Galvalume®  
G90 per ASTM A 653 for Galvanized
- ▶ Gauges: 24 ga, 22 ga, 20 ga and 18 ga
- ▶ 12" panel coverage, 1 1/2" panel height
- ▶ Flush face with 2" reveal, concealed fastened, non-end lapping panel system
- ▶ Roll-Formed Panels
- ▶ Panel Length: 5' minimum, 40' maximum
- ▶ Use on single-skin or field-assembled wall systems
- ▶ Panels can be installed horizontally or vertically and are interchangeable for accent effects
- ▶ Custom capabilities include:
  - Perforated panels for wind screens and liner panels

## TESTING AND APPROVALS

- ▶ ASTM E 283 Air Leakage
- ▶ ASTM E 331 Water Penetration
- ▶ ASTM E 330 Uniform Static Air Pressure Difference
- ▶ ASTM E 1592 Load Test


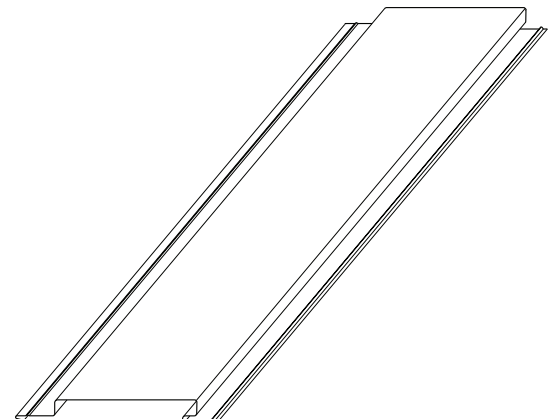


**MS Metal Sales™**


# TLC-13 WALL PANEL

**Condensed  
Technical  
Reference**

## FASTENING PATTERN

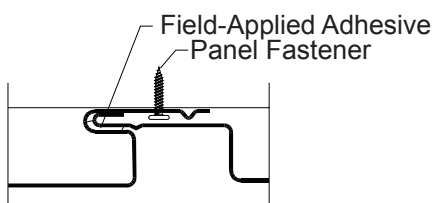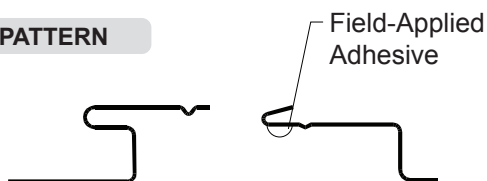

## DIRECTIONAL DETAILS

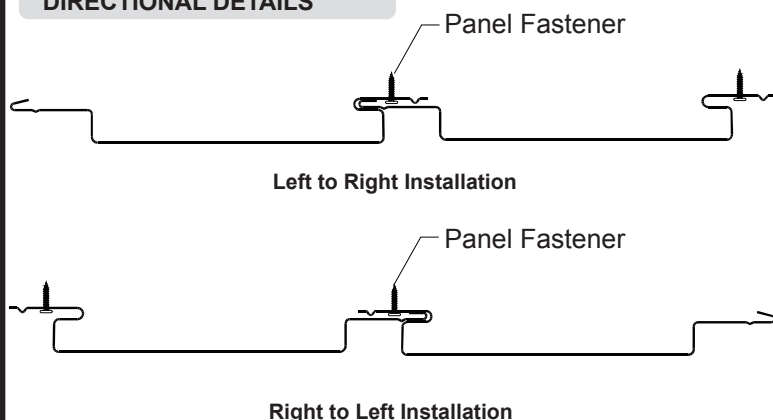

## FASTENING INFORMATION

Overdriven fasteners will cause panel distortions.

Fasteners should extend 1/2" or more past the inside face of the support material.

Thick Panels (ex. 18 ga) or supports (ex. 1/2" steel) may require predrilling of holes for screws.

Panel Fasteners:

Attaching to Wood:

#10-12 Pancake Head Wood Screw

Attaching to Steel:

<18 ga: 1/4"-13 Deck Screw

>=18 ga, <=12 ga: #10-16 Pancake Head Driller

Trim Fasteners:

1/4"-14 x 7/8" XL Stitch Screw

1/8" x 3/16" Pop Rivet

Field-Applied Adhesive:

1/4" diameter bead of SM7108

## SECTION PROPERTIES

| Ga | Width<br>in | Yield<br>ksi | Weight<br>psf | Top In Compression         |                            | Bottom In Compression      |                            |
|----|-------------|--------------|---------------|----------------------------|----------------------------|----------------------------|----------------------------|
|    |             |              |               | Ixx<br>in <sup>4</sup> /ft | Sxx<br>in <sup>3</sup> /ft | Ixx<br>in <sup>4</sup> /ft | Sxx<br>in <sup>3</sup> /ft |
| 24 | 12          | 50           | 1.51          | 0.0601                     | 0.0595                     | 0.1277                     | 0.1175                     |
| 22 | 12          | 50           | 1.97          | 0.0878                     | 0.0892                     | 0.1798                     | 0.1690                     |
| 20 | 12          | 33           | 2.37          | 0.1280                     | 0.1373                     | 0.2450                     | 0.2400                     |
| 18 | 12          | 33           | 3.14          | 0.1920                     | 0.2155                     | 0.3380                     | 0.3361                     |

## ALLOWABLE UNIFORM LOADS, psf for various fastener spacings

| Inward Load |    |    |    |    |    | Outward Load |    |    |    |    |    |
|-------------|----|----|----|----|----|--------------|----|----|----|----|----|
| 2'          | 3' | 4' | 5' | 6' | 8' | 2'           | 3' | 4' | 5' | 6' | 8' |
| 50          | 45 | 39 | 34 | 28 | 18 | 80           | 71 | 62 | 53 | 39 | 22 |
| 63          | 56 | 50 | 44 | 38 | 25 | 88           | 78 | 68 | 59 | 49 | 30 |
| 63          | 56 | 50 | 44 | 38 | 25 | 88           | 78 | 68 | 59 | 49 | 30 |
| 63          | 56 | 50 | 44 | 38 | 25 | 88           | 78 | 68 | 59 | 49 | 30 |

- Theoretical section properties have been calculated per AISI 2016 'North American Specification for the Design of Cold-Formed Steel Structural Members'. Ixx and Sxx are effective section properties for deflection and bending.
- Allowable load is calculated in accordance with AISI 2016 specifications considering bending, shear, combined bending and shear and deflection. Allowable load does not address web crippling, fasteners, support material or load testing.
- Allowable load considers the 3 or more equal spans condition. Panel weight is not considered.
- Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
- Allowable loads do not include a 1/3 stress increase for wind.

**MS Metal Sales™**

[metalsales.us.com](http://metalsales.us.com)

Anchorage, AK 866.640.7663  
Bay City, MI 888.777.7640  
Deer Lake, PA 800.544.2577  
Denver, CO 800.289.7663

Detroit Lakes, MN 888.594.1394  
Fontana, CA 800.782.7953  
Fort Smith, AR 877.452.3915  
Independence, MO 800.747.0012

Jacksonville, FL 800.394.4419  
Jefferson, OH 800.321.5833  
Mocksville, NC 800.228.6119  
Nashville, TN 800.251.8508  
Rock Island, IL 800.747.1206  
Rogers, MN 800.328.9316

Seattle, WA 800.431.3470  
Sellersburg, IN 800.999.7777  
Sioux Falls, SD 888.299.0024  
Spokane, WA 800.572.6565  
Temple, TX 800.543.4415  
Woodland, CA 800.759.6019

©MSMC/7-2020