



# Product Data Sheet


## MULE-HIDE PVC WALKWAY ROLL

### PRODUCT DESCRIPTION

Mule-Hide PVC Walkway Rolls incorporate an aggressive, non-slip, diamond plate tread pattern of PVC material that offers excellent tear and puncture resistance

### BASIC USES

The Mule-Hide PVC Walkway Roll is designed to protect the PVC membrane in those areas exposed to repetitive foot traffic and other hazards. Mule-Hide specifications require the use of such a product in walkway concentration points (i.e., roof hatches, access doors, rooftop ladders, etc.) regardless of traffic frequency. Walkways must also be installed if regular maintenance (once a month or more) is necessary to service rooftop equipment.

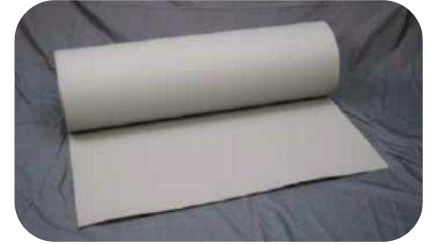

### SPECIFICATIONS

<b>*Typical Properties</b>		
Thickness:	ASTM D412	Min. 0.072" (1.83 mm) Max. 0.088" (2.24 mm)
Density	ASTM D792	Min. 80.5 lbs/ft <sup>3</sup> (1.29 gr/cm <sup>3</sup> ) Max. 84.3 lbs/ft <sup>3</sup> (1.35 gr/cm <sup>3</sup> )
Tensile Strength:	ASTM D638	600 psi (4.1 MPa)
Tear Strength:	ASTM D624	100 lbf/in (17.5 kN/m)
*Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this material		

<b>LEED Information</b>	
Pre-consumer Recycled Content	45%
Post-consumer Recycled Content	20%
Manufacturing Location	Mountain Top, PA
Solar Reflectance Index (SRI)	N/A

### COLORS

- Gray

### PACKAGING

- Size: 36" wide x 60' long (91.4 cm x 18.3 m) – 95 lbs per roll
- Each roll is individually bagged.
- Fourteen rolls per skid.
- Store rolls in a clean, cool, dry location.

### BENEFITS & SUPPLEMENTAL STATEMENTS

- Increased slip resistance with aggressive diamond plate tread design
- Superior weathering package for long term performance

# Product Data Sheet

MULE-HIDE PVC WALKWAY ROLL

---

## **INSTALLATION INSTRUCTIONS**

### **SURFACE PREPARATION**

1. If membrane or walkway roll has been exposed for over 7 days, use PVC Membrane Cleaner and a Scotch-Brite Pad to prepare the area to be welded to the walkway material. Allow membrane cleaner to dry completely.

### **APPLICATION**

1. Position the walkway in desired location. Cut walkway rolls into maximum 10 (ten) foot lengths and position with a minimum 1-inch gap between adjacent pieces to allow for water drainage. Cut the walkway roll to allow for a minimum 4-inch gap over any field splice. (Since the attachment of the walkway roll is permanent, this will allow access to the field seams for future repairs).
2. Using an automated welder, weld all four sides of the walkway material to the membrane. (Welding temperature and speed is typically the same as used for the roofing membrane) A hand welder may be used but productivity will be reduced.

*Review Mule-Hide Specifications and Details for additional information.*

### **PRECAUTIONS**

1. Walkway rolls are a maintenance item and are not covered under the roofing warranty.
2. This product is intended to be utilized as a walkway only and is not designed as a perimeter warning line or substitution for ballast. Walkway rolls cannot be positioned within 10-feet (3 m) of the roof perimeter.
3. Allowing walkway to relax and warm up in the sun light will facilitate installation.

### **PROTECTION & SAFETY**

Mule-Hide maintains Safety Data Sheets on all of its non-exempt products. Safety Data Sheets contain health and safety information for your development of appropriate product handling procedures to protect your employees and customers. Mule-Hide's Safety Data Sheets should be read and understood by all of your supervisory personnel and employees before using Mule-Hide products in your facilities.

### **ADDITIONAL INFORMATION**

The information given on this PDS is subject to change without notice. Always check the Mule-Hide website at [www.mulehide.com](http://www.mulehide.com) for the latest information, changes and updates or contact Mule-Hide Products Company at 800-786-1492.

### **DISCLAIMER**

The statements provided concerning the material shown are intended as a guide for material usage and are believed to be true and accurate at the time of printing. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. Since the manner of use is beyond our control, Mule-Hide does not authorize anyone to make any warranty of merchantability or fitness for any particular purpose or any other warranty, guarantee or representation, expressed or implied, concerning this material. Buyer and user accept the product under these conditions and assume the risk of any failure, any injury person or property (including that of the user), loss or liability resulting from the handling, storage or use of the product whether or not it is handled, stored or used in accordance with the directions or specifications. Mule-Hide must be notified in writing of any claims and be given the opportunity to inspect the alleged failure before repairs are made.