


Flared 4-Strut Tyloop (TL4)

The AR Flared 4-Strut Tyloop is made with two looped wires welded to a helix coil. Suitable for heavy form anchorage in mass concrete construction. The standard length is 380 mm (15") for 25 mm (1") and 32 mm (1¼") diameters with struts flaring to 75 mm (3") diameters. The standard flare unit is supplied unless special size or shaped flares are requested.



Sizes	
inch	(mm)
½" - 6"	(13 - 150)
¾" - 9"	(20 - 225)
1" - 12"	(25 - 300)
1¼" - 15"	(32 - 380)

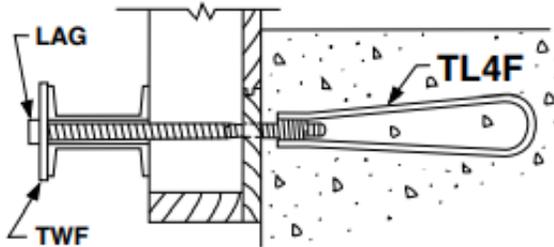