


Plastic Cone Snap-Ty (PC)

The AR Plastic Cone Snap-Ty and the AR Heavy Duty Plastic Cone Snap-Ty are equipped with a Plastic Cone Spreader providing for a 25 mm (1") set back manufactured for specified wall thicknesses. The plastic cone reduces the likelihood of concrete paste seepage and protects the break back. The break back is approximately 3 mm (1/8") smaller than the cone length. The estimated break back is approximately 22 mm (7/8"). The table provides the length and taper of the cones. Special size cones are available as custom orders. Available in stainless steel. Also available in water seal.


STANDARD 2.25M
APPROXIMATE SAFE
WORKING LOAD
10kN (2,250 LBS)
2:1 Safety Factor

HEAVY DUTY 3M
APPROXIMATE SAFE
WORKING LOAD
13.5 kN (3,000 LBS)
2:1 Safety Factor

Set back	Taper Inside to outside
25 mm (1")	10 mm to 25 mm (3/8" to 1")

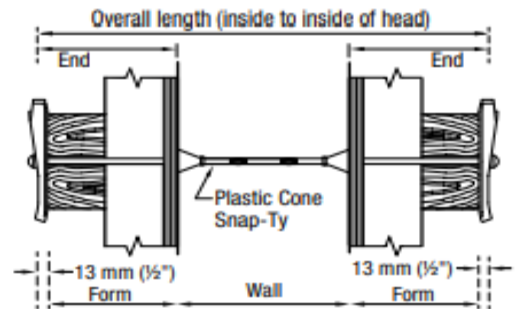

For architectural design, insert the Plastic Snap-Ty Plug once form work has been removed.

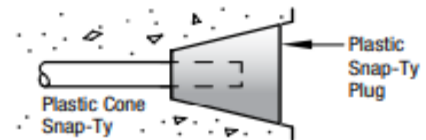

To order, please specify the following information

EXAMPLE

Name Plastic Cone Snap-Ty (PC)
 Type Heavy Duty 3M
 End 120 mm (4 3/4")
 Wall 450 mm (18")
 End 120 mm (4 3/4")
 Break back (standard) 22 mm (7/8")
 Strength 13.5 kN (3,000 lbs)
 Quantity 300

