


Linden Chairs

Corrosion free All Plastic Linden Chairs are used in slabs for supporting all types of reinforcing steel. Excellent for supporting epoxy coated rebar in bridge deck construction, or where-ever a corrosion free support is required. The high sizes have an arch design for straddling lower mats of rebar. The chair is made of High Impact polypropylene and its design gives it the strength of steel. Linden chairs are strong yet light in weight and packaged in poly bags for convenience of carrying around job sites.

LINDEN CHAIRS SIZES AND PACKAGING WEIGHTS

inch	mm	PCS/BAG	LBS/MFT	CTN SKID	SKID QTY
1	25	500	30	40	20,000
1 1/4	32	500	35	40	20,000
1 1/2	40	250	46	40	10,000
1 3/4	45	250	50	40	10,000
2	50	250	62	40	10,000
2 1/4	58	200	78	40	10,000
2 1/2	63	200	82	40	8,000
2 3/4	70	300	84	25	7,500
3	75	300	85	25	7,500
3 1/4	77	300	88	25	7,500
3 1/2	85	300	90	25	7,500
3 3/4	92	200	93	25	5,000
4	100	200	95	25	5,000
4 1/4	108	200	98	25	5,000
4 1/2	110	200	112	25	5,000
4 3/4	120	200	119	25	5,000
5	125	200	120	25	5,000
5 1/4	133	200	125	25	5,000
5 1/2	140	200	130	25	5,000
5 3/4	146	200	148	25	5,000
6	150	100	155	25	2,500
6 1/4	158	100	160	25	2,500
6 1/2	165	100	177	25	2,500
6 3/4	170	100	184	25	2,500
7	175	100	195	25	2,500
7 1/4	183	75	255	25	1,875
7 1/2	190	75	310	25	1,875
7 3/4	195	75	338	25	1,875
8	200	75	343	25	1,875
8 1/4	210	75	350	25	1,875
8 1/2	215	50	365	25	1,250
8 3/4	220	50	378	25	1,250
9	228	50	400	25	1,250
9 1/4	235	50	415	25	1,250
9 1/2	240	50	424	25	1,250
9 3/4	247	50	430	25	1,250
10	254	50	440	25	1,250

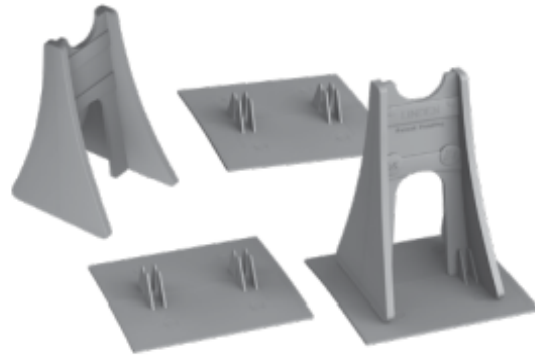

LINDEN CHAIR DATA SHEET

Size Available	1-10 inches (25-254 mm) every 1/4" (6 mm)
Colour	concrete grey
Material	reinforced, high impact polypropylene
Strength	a minimum 400 lbs. (180 kg) / chair
Chemical Resistancy	excellent
Packaging	in heavy-duty uv protected poly bags Quantity varies by size
Installation	good for both Black and Corrosion resistant rebar place chairs on deck forms can straddle bottom steel bars spacing depends on loads standard spacing is every 3-4 feet (0.9 - 1.2 m)