


## Plastic Cone Snap-Ty (PC)

The AR Plastic Cone Snap-Ty and the AR Heavy Duty Plastic Cone Snap-Ty are equipped with a Plastic Cone Spreader providing for a 25 mm (1") set back manufactured for specified wall thicknesses. The plastic cone reduces the likelihood of concrete paste seepage and protects the break back. The break back is approximately 3 mm (1/8") smaller than the cone length. The estimated break back is approximately 22 mm (7/8"). The table provides the length and taper of the cones. Special size cones are available as custom orders. Available in stainless steel. Also available in water seal.


**STANDARD 2.25M**  
**APPROXIMATE SAFE**  
**WORKING LOAD**  
**10kN (2,250 LBS)**  
**2:1 Safety Factor**

**HEAVY DUTY 3M**  
**APPROXIMATE SAFE**  
**WORKING LOAD**  
**13.5 kN (3,000 LBS)**  
**2:1 Safety Factor**

Set back	Taper Inside to outside
25 mm (1")	10 mm to 25 mm (3/8" to 1")

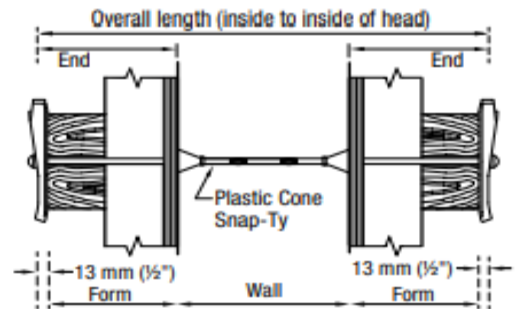

For architectural design, insert the Plastic Snap-Ty Plug once form work has been removed.

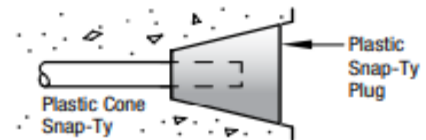

To order, please specify the following information

**EXAMPLE**

Name ..... Plastic Cone Snap-Ty (PC)  
 Type ..... Heavy Duty 3M  
 End ..... 120 mm (4¾")  
 Wall ..... 450 mm (18")  
 End ..... 120 mm (4¾")  
 Break back ..... (standard) 22 mm (7/8")  
 Strength ..... 13.5 kN (3,000 lbs)  
 Quantity ..... 300

