

Plastic Washer Snap-Ty (PW)

The AR Plastic Washer Snap-Ty and Heavy Duty Plastic Washer Snap-Ty are equipped with a plastic washer, provide for a 3 mm to 5 mm (1/8" to 3/16") break back less than the Plastic Washer Thickness and are manufactured for specified wall thicknesses. The Hex Head allows the Ty end to be broken back prior to removal of the forms, allowing for ease of stripping. Available in stainless steel. Also available in water seal.


To order, please specify the following information

EXAMPLE

Name Plastic Washer Snap-Ty (PW)
 Type Standard 2.25M
 End 210 mm (8¼")
 Wall 250 mm (10")
 End 120 mm (8¼")
 Break back (standard) 3 mm (1/8")
 Strength 10 kN (2,250 lbs)
 Quantity (pkg of 100) 400

STANDARD 2.25M
APPROXIMATE SAFE
WORKING LOAD
10kN (2,250 LBS)
2:1 Safety Factor

HEAVY DUTY 3M
APPROXIMATE SAFE
WORKING LOAD
13.5 kN (3,000 LBS)
2:1 Safety Factor

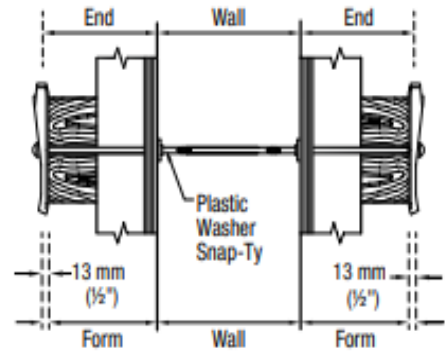

Plastic Washer break back is 3 mm to 5 mm (1/8" to 3/16") less than the plastic washer thickness.

NOTE: For Ty removal and break back guidelines please see page 101 of the Appendix.

