

She-Bolt

AR She-Bolt Assemblies are high strength, adaptable units suitable for medium and heavy concrete construction. Manufactured with external lag threads, they provide a positive system for use with gang forms and/or steel forms. The Inside Rods are manufactured with either national coarse thread or lag thread. If desired, continuous threaded lagstud can be furnished in 1,500 mm or 3,000 mm (5' or 10') lengths for field cutting to required specifications.




To order, please specify the following information


EXAMPLE

Name She-Bolt
 Nominal Diameter
 Inside Rod Diameter 20 mm (3/4")
 Overall Length (O) 510 mm (20")
 Outside Thread (T) 250 mm (10")
 Inside Thread Type (R) lag
 Outside Thread Type lag
 Quantity 200

APPROXIMATE SAFE WORKING LOAD
2:1 Safety Factor

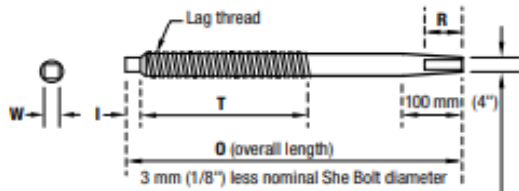

Variable 2400 mm (8'-0") to 3000 mm (10'-0") Lift Form using She Bolts with High Tensile Lagstud

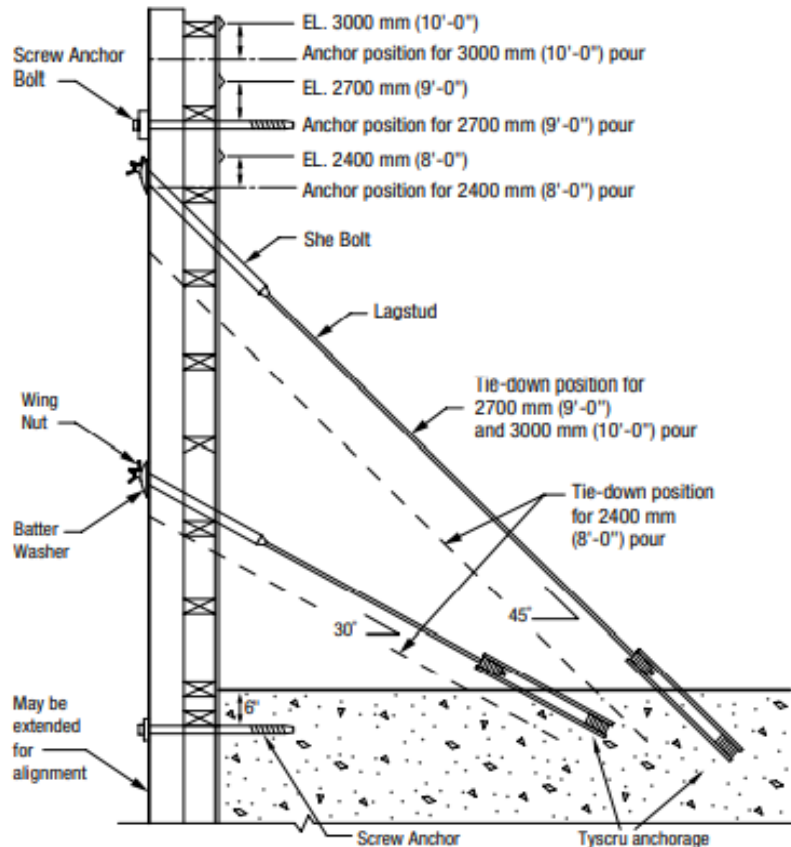

She-Bolt Dimension Data

Nominal Diameter mm (in)	Internal Thread Diameter mm (in)	Length O mm (in)	Thread T mm (in)	I mm (in)	W mm (in)	R mm (in)
25 mm (1")	13 mm (1/2")	500 mm (20")	250 mm (10")	20 mm (3/4")	13 mm (1/2")	2 x diameter plus 6 mm (2 x diameter plus 1/4")
29 mm (1 1/8")		600 mm (24")	300 mm (12")	20 mm (3/4")	20 mm (3/4")	
32 mm (1 1/4")	20 mm (3/4")	500 mm (20")	250 mm (10")	25 mm (1")	20 mm (3/4")	
35 mm (1 1/8")		600 mm (24")	300 mm (12")	25 mm (1")		
38 mm (1 1/2")	25 mm (1")	600 mm (24")	250 mm (10")	25 mm (1")	25 mm (1")	
		800 mm (32")	300 mm (12")	25 mm (1")		
			460 mm (18")	25 mm (1")		