

Standard Tyscru


The AR Standard 2-Strut Tyscru is available in 13 mm, 20 mm and 25 mm ($\frac{1}{2}$ ", $\frac{3}{4}$ " and 1") nominal diameters and may be fabricated to required length to the nearest 3 mm ($\frac{1}{8}$ "). The AR Standard 4-Strut Tyscru is available in 20 mm, 25 mm and 32 mm ($\frac{3}{4}$ ", 1" and $1\frac{1}{4}$ ") nominal diameters and may be fabricated to required length to the nearest 3 mm ($\frac{1}{8}$ ").

To order, please specify the following information


EXAMPLE

Name Standard Tyscru
Type 2-strut 4.5M
Nominal Diameter 13 mm ($\frac{1}{2}$ ")
Tyscru length 560 mm (22")
Strength 20 kN (4,500 lbs.)
Quantity 100

**APPROXIMATE SAFE
WORKING LOAD**
see table on page 51
2:1 Safety Factor

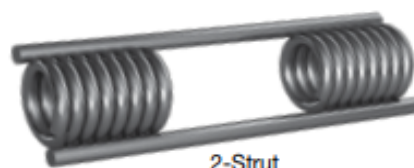

2-Strut

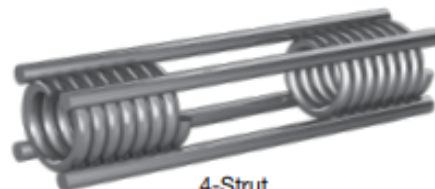

4-Strut

