

# Cone-Tight Tyscru

The AR Cone-Tight Tyscru has the same capacities as the Standard 2-Strut and 4-Strut Tyscru and is available in 13 mm, 20 mm, 25 mm and 32 mm (½", ¾", 1" and 1¼") nominal diameters in a minimum length of 100 mm (4"). Cone-Tight Tycones are readily attached to the protruding coils. For coil protrusion lengths see table below.

To order, please specify the following information


EXAMPLE  
Name.....Cone-TightTyscru  
Type ..... 4-strut 18M  
Nominal Diameter ..... 20 mm (¾")  
Tyscru length ..... 300 mm (12")  
Strength ..... 40 kN (9,000 lbs.)  
Quantity..... 100

APPROXIMATE SAFE  
WORKING LOAD  
see table on page 51  
2:1 Safety Factor

Diameter	Coil Protrusion
13 mm (½")	10 mm (3/8")
20 mm (¾")	13 mm (½")
25 mm (1")	13 mm(½")
32 mm (1¼")	13 mm (½")



2-Strut

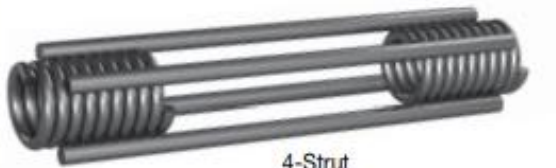

4-Strut

