

Waterseal Tyscru

The AR Waterseal Tyscru has the same capacity as the standard 2-Strut and 4-Strut Tyscru. The Waterseal Tyscru is available as standard or cone tight in 13 mm, 20 mm, 25 mm and 32 mm ($\frac{1}{2}$ ", $\frac{3}{4}$ ", 1" and 1 $\frac{1}{4}$ ") nominal diameters in a minimum length of 100 mm (4") for a Cone-Tight Tyscru and 150 mm (6") for a Waterseal Tyscru. AR uses a unique manufacturing process to fuse a water stop plastic washer to each wire strut. The plastic washer will break the surface continuity and prevent seepage of water along the struts.

To order, please specify the following information


EXAMPLE

Name Waterseal Tyscru
Type 2-strut 6.75M
Nominal Diameter 13 mm ($\frac{1}{2}$ ")
Tyscru length 250 mm (22")
Strength 20 kN (4,500 lbs.)
Quantity 200

**APPROXIMATE SAFE
WORKING LOAD**
see table on page 42
2:1 Safety Factor



2-Strut

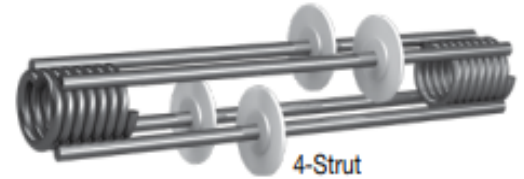

4-Strut

