

Single End Welding Tyscru

The AR Single End Welding Tyscru is made with 2 struts welded to a coil at one end only, leaving the open end available for field welding, particularly suitable for heavy and special applications. Available in 13 mm, 20 mm and 25 mm (½", ¾" and 1") diameters.

To order, please specify the following information


EXAMPLE

Name Single End Welding Tyscru

Nominal Diameter 20 mm (½")

Overall length 100 mm (4")

Quantity 200

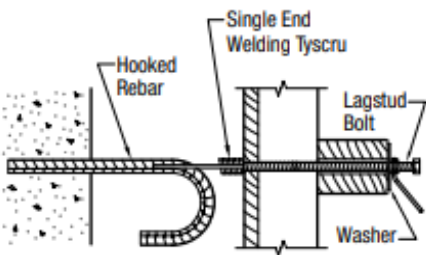

APPROXIMATE SAFE WORKING LOADS

Diameter	Length	Safe Working Load	Weld Length
13 mm (½")	100 mm (4")	16.5 kN (3,750 lbs)	32 mm (1¼")
20 mm (¾")	150 mm (6")	30.0 kN (6,750 lbs)	38 mm (1½")
25 mm (1")	250 mm (10")	60.0 kN (13,500 lbs)	50 mm (2")

APPROXIMATE SAFE
WORKING LOAD
2:1 Safety Factor

NOTE: Diameter of rebar will influence Single End Welding Tyscru strength.