



Pencil Rod Tightening Wrench

The AR Tightening Wrench is placed over a smooth or deformed rod behind a rod clamp and is used to draw the assembly tight, allowing the clamp to be properly tightened. The Tightening Wrench is available in 1/4", 3/8" and 1/2" sizes.

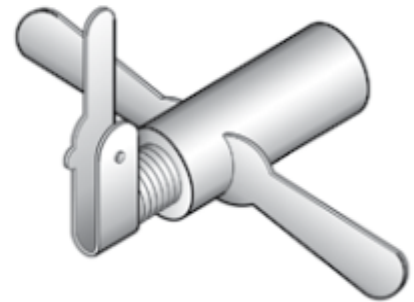

Caution: Do not use the Tightening Wrench for straightening forms or for pulling smooth rods from set concrete.

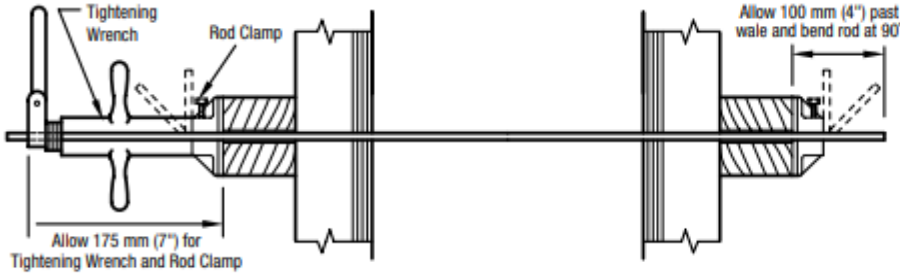

APPROXIMATE SAFE WORKING LOADS 2:1 Safety Factor

To order, please specify the following information

EXAMPLE
 Name Tightening Wrench
 Size 13 mm (1/2")
 Quantity 200

Diameter		kN	(lbs)
mm	(in)		
6 mm	(1/4")	5 kN	(1,125 lbs)
10 mm	(3/8")	10 kN	(2,200 lbs)
13 mm	(1/2")	15 kN	(3,750 lbs)