



# OLYBOND<sup>®</sup>

## ADHESIVES

**OMG**  
ROOFING PRODUCTS

Superior productivity.  
Superior performance.



THAT'S ENOUGH TO GO

TO THE  
MOON  
AND BACK

## OLYBOND: THE MOST TRUSTED NAME IN ROOFING ADHESIVES!

*OlyBond® Adhesives are easy-to-use, hassle-free and designed to get you off the roof and onto the next job quickly. OlyBond is a fast-acting, two-component, low-rise polyurethane foam adhesive that adheres most insulation types to a wide selection of common roof decks and materials.*

*OlyBond can be used in both new and re-roofing applications, including jobs that require multiple insulation layers. No matter what size job you have, large or small, there's an OlyBond adhesive that's right for your next project.*

- Odor free and quiet application – excellent for sensitive areas, such as schools, office buildings, and hospitals
- Reduces re-roof and construction noise
- Rapid application
- Chemical cure results in fast set-up time without relying on moisture in the air
- No thermal bridging caused by fasteners
- Extremely high wind-uplift ratings
- Easy to ship; non-hazardous
- Widely accepted with more FM approvals than any other insulation adhesive

In addition, OlyBond Adhesives offer superior rise and spread, which allows the adhesive to sufficiently fill most low spots and gaps. Providing greater rise than other adhesives on the market results in a larger bonding coverage area when insulation board is installed. This helps provide OlyBond with exceptional strength and extremely high wind ratings.

### APPROVALS

OlyBond Adhesives are approved by most roof system manufacturers and are Factory Mutual, Miami Dade, Florida Building Code and Underwriters Laboratories approved.




Florida Building Code



**More Factory Mutual approvals than any other insulation adhesive!**



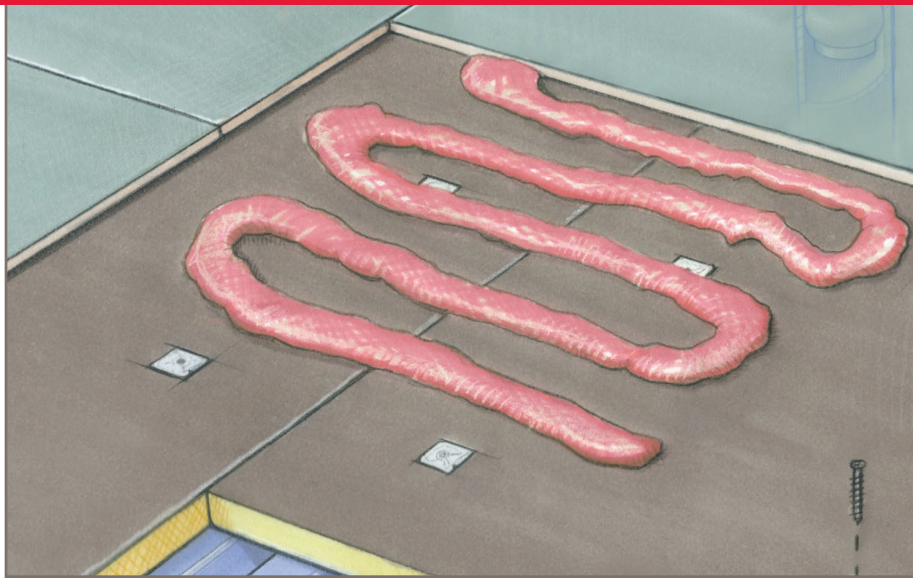

## COMPATIBILITY

### Roof Decks and Substrates:

- Structural concrete
- Gypsum
- Cementitious wood fiber plank
- Lightweight insulating concrete
- Steel (22 gauge [0.75mm] or thicker with approved cross section)
- Plywood (5/8-inch [16mm] thick min.)
- Smooth surface BUR (aged non-glossy)
- Smooth and granular surface modified bitumen (properly prepared)
- Existing sprayed in place polyurethane foam
- Base sheets
- Most vapor barriers (including asphaltic\* and fleece-top)

### Roof Insulation and Cover Board:

- Polyisocyanurate  
4-ft. x 4-ft. (1m x 1m) maximum
- Expanded polystyrene
- High density wood fiber
- Hard cover boards
- Perlite
- Certain extruded polystyrene\*

\*For specific applications, call for assistance


## COVERAGE RATES

Coverage rates vary depending on several factors including the surface of the substrate and prescriptive fastening pattern requirements. A good application guideline is up to 2.5 squares of coverage per gallon on a smooth surface with 12-inch on-center bead spacing.

## OLYBOND500® APPLICATION

Regardless of the packaging, OlyBond500 is dispensed through a portable 1:1 applicator in semi-liquid beads that spread 3/4-in. to 1-in. (20 mm to 25 mm) above the substrate.

In addition, OMG Roofing Products offers several temperature-optimized formulations, for year-round use in temperatures as low as 0°F (-17°C). See the temperature guide below for details.

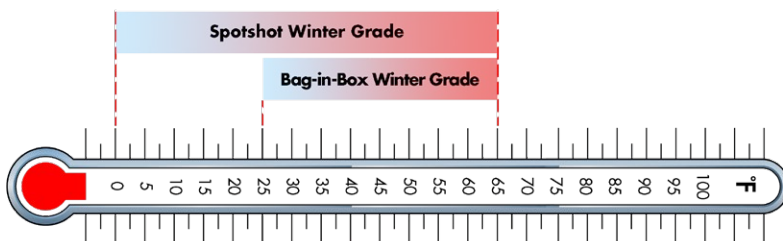


All other regular OlyBond500 Products    Canisters - Bag-in-Box - SpotShot - 15 gal Drums

## EASY 3-STEP APPLICATION



**1. Apply in bead form.** (OlyBondCanister Adhesives can also be spattered for fleece applications).

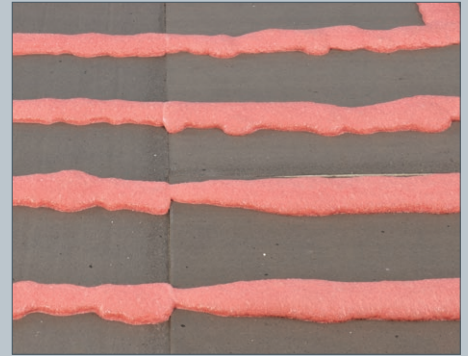

**2. Allow product to rise into foam.**



**3. Lay insulation or cover board into wet foam.**

**OlyBond: the most trusted name in roofing adhesives!**

## NATIONWIDE CUSTOMER SUPPORT

When it comes to service, no one beats OMG Roofing Products. We have the largest directly-employed field service team in the commercial roofing industry available to help you. Our team offers product demonstrations, training, job starts, fastener and adhesive pull tests and much more. Let our local sales representative help with your next project.



OMG is the leading U.S. supplier of roofing fasteners, roof insulation adhesives, retrofit roof drains, pipe supports, solar mounts and installation productivity enhancement tools.

Our products are available nationwide through a network of roofing distributors, and supported by our national network of factory-direct sales representatives.

**For more information or an on-site OlyBond demonstration, please call 800-633-3800.**

## YOU SELECT THE APPLICATION METHOD WE'LL PROVIDE THE OLYBOND

We offer OlyBond in five convenient packaging options for every roofing application:

- Pressurized, equipment-free, canister sets
- 30-gallon (113.56 L) Drum sets
- 1,500 ml SpotShot Cartridges (4/box)
- 100-gallon (378.5 L) Drum sets (OlyBond Classic only).
- 10-gallon (37.86 L) Bag-in-Box sets



## OLYBOND® APPLICATION TOOLS

In addition, OlyBond application equipment is available for every packing option, from hand-held power applicators, to sophisticated PaceCards capable of applying 120 squares (1115 m<sup>2</sup>) of OlyBond per hour!



SpotShot Power Applicator



BeadPro Cart  
For use with Canister sets



PaceCard 3  
For use with Bag-in-Box sets



153 BOWLES ROAD, AGAWAM, MA 01001 USA  
800-633-3800 413-789-0252 [OMGROOFING.COM](http://OMGROOFING.COM)

The OMG PaceCard® 3 dispensing cart and the Bag-in-Box OlyBond500® Part 1/Part 2 adhesive system, including the adhesive dispensing method, are covered by one or more of U.S. Patent Nos. 8,167,170; 8,342,372; 8,474,658 and 9,327,308; and Canadian Patent Nos. 2,591,502 and 2,821,452. OMG PCPreserver™, PaceCard® 3, OlyBond® and OlyBond500® are trademarks of OMG, Inc. Copyright © 2021. All rights reserved.

Superior productivity.  
Superior performance.

