

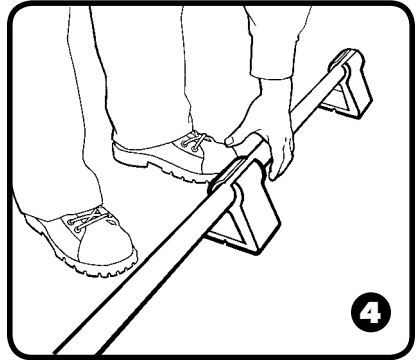
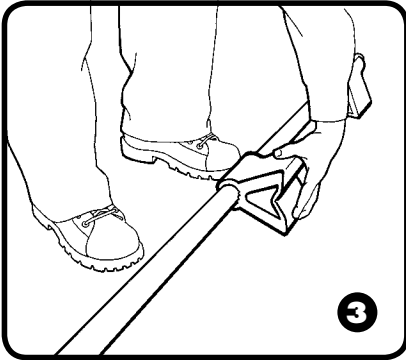


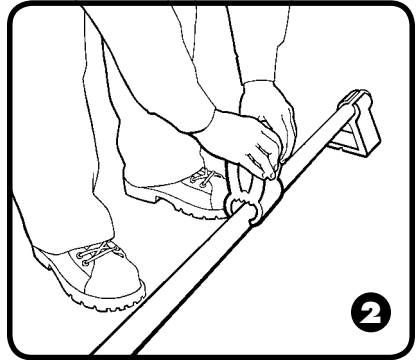

PipeGuard

ROOFTOP PIPE SUPPORTS

INSTALLATION INSTRUCTIONS

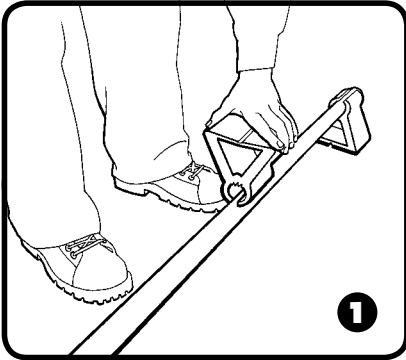

The use of a compatible separator sheet is required between PipeGuard and PVC roofing membranes. Consult roof membrane manufacturer for specific requirements.

Spacing Placement

- Every 10 ft. (3.05m) for 2-in. (50mm) pipes or larger
- Every 8 ft. (2.44m) for 1.5-in. (40mm) pipes
- Every 6 ft. (1.83m) for 1-in. (25mm) pipes or smaller
- Placed at every union, junction and source



Superior productivity. Superior performance.

153 BOWLES ROAD, AGAWAM, MA 01001 USA
800-633-3800 413-789-0252 OMGROOFING.COM