

At your service from start to finish




When it comes to service, no one beats OMG Roofing Products. We have the largest directly employed field service team in the commercial roofing industry available to help. Our team offers product demonstrations, training, job starts, fastener pull tests to determine deck suitability and much more. Let our local field service representative help with your next project.

OMG is the leading U.S. supplier of roofing fasteners, roof insulation adhesives, retrofit roof drains, pipe supports and installation productivity enhancement tools.

Our products are available nationwide through a network of roofing distributors, and supported by our national network of direct factory sales personnel.

Call 800-633-3800 or visit omgroofing.com

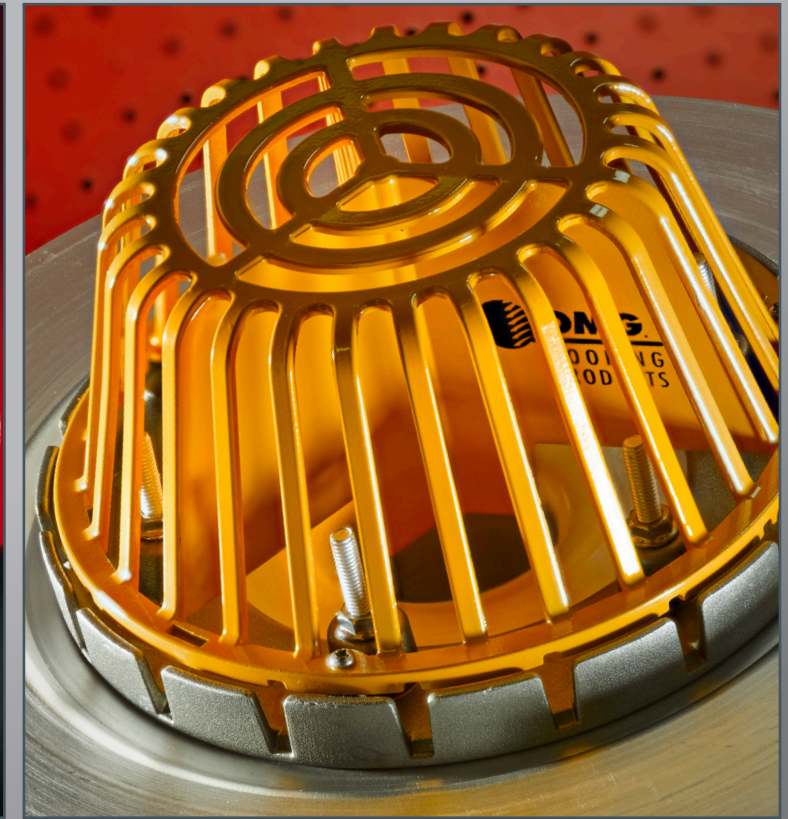

OMG
ROOFING PRODUCTS
153 BOWLES ROAD, AGAWAM, MA 01001 USA
800-633-3800 413-789-0252 OMGROOFING.COM

Superior productivity.
Superior performance.

RhinoBond®, Sinch®, RhinoTrac®, AccuTrac®, OlyBond®, OlyBond500®, OlyGlu®, PaceCart®, OMG RetroDrain®, OlyFlow®, OMG Hercules®, SpeedTite®, PipeGuard®, Gyptec®, LiteDeck®, ASAP®, RoofGrip®, and Headlok® are registered trademarks of OMG Building Products LLC. OMG PowerGrip™ and Vortex Breaker Strainer™ are trademarks of OMG Building Products LLC. Copyright © 2026. All rights reserved.



GEN1000 Rev. FEB2026

CATALOG

OMG
ROOFING PRODUCTS

Superior productivity.
Superior performance.

**Standard RoofGrip®
Drill Point Fastener**

1 5/8"–8" (40–200mm) lengths
#3 Phillips head
S W deck types

Heavy Duty Roofing Fastener

1 1/4"–24" (30–610mm) lengths
#3 Phillips head
S W SC deck types

Extra Heavy Duty Fastener

2"–16" (50–405mm) lengths
#3 Phillips head
S W AL deck types

RetroDriller Fastener

4"–10" (100–255mm) lengths
#3 square drive
P deck type

Purlin Fastener

2"–8" (50–200mm) lengths
1/4" hex head
P deck type

HeadLok®

2 7/8"–18" (70–455mm) lengths
Oversized head; installed with
SpiderDrive® bit
S W SC deck types

CD-10

2"–12" (50–305mm) lengths
Flat top pan head
Diamond guide point
SC deck type

Lite-Deck Fastener

2 5/8"–12" (65–305mm) lengths
6 lobe drive
G CWI deck types

Polymer GypTec®

2 1/2"–12" (60–305mm) lengths
1/4" (5mm) square drive
G CWI deck types

Masonry Anchor


7/8"–2" (22–50mm) lengths
3/16"–1/4" (4–6mm) diameters
Zinc plated pin
CNU M SC substrates

key


- S** Steel
- W** Wood
- G** Gypsum
- M** Masonry
- P** Purlins
- AL** Aluminum
- SC** Structural Concrete
- LC** Lightweight Concrete
- LWIC** Lightweight Insulating Concrete
- CNU** Concrete Masonry Unit
- CWF** Cementitious Wood Fiber

Fasteners and Plates

More than 40 years ago, **OMG** started as a fastener manufacturer for commercial roofing. Today, **OMG** offers the industry's widest assortment of specialty roof fasteners and plates for virtually every roofing application and deck type.

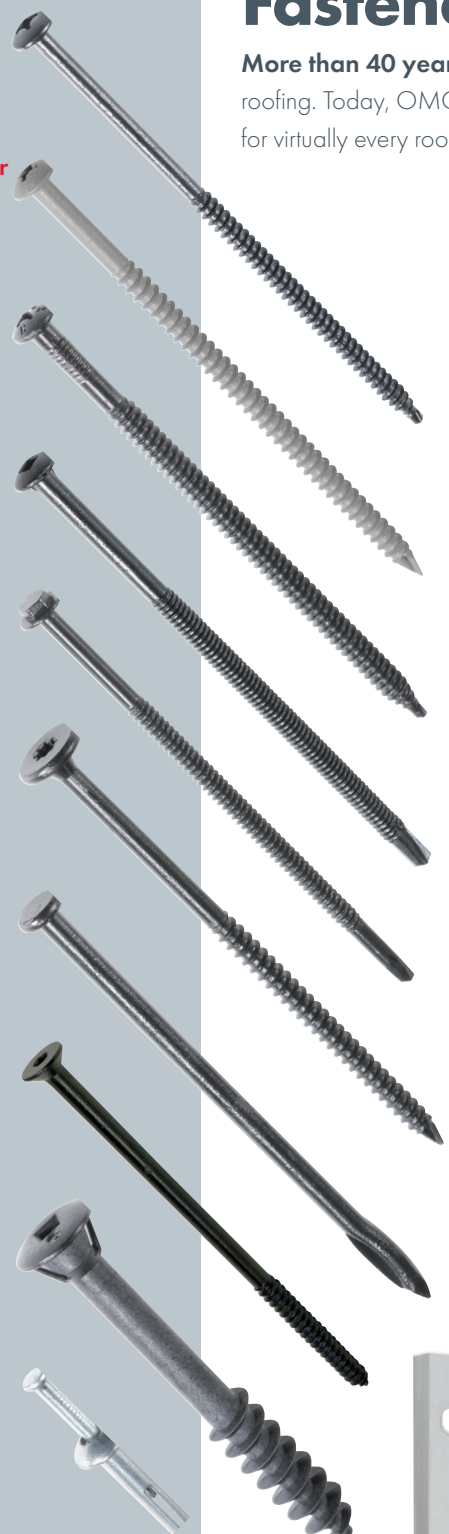

Steel Plate
2" and 3"
(50 and 75mm)
diameters available



Plastic Locking Plate
2" and 3" (50 and
75mm)
diameters available



AccuTrac® Plate
Use with AccuTrac tool
3" (75mm) square steel insula-
tion plate



GypTec® Plate
2" and 3" (50 and
75mm) diameter
plates available



LiteDeck® Plates
For use with LiteDeck
Fasteners
3" (80mm) diameter



RhinoBond® Plates
For PVC and TPO
membranes
3" (80mm) diameter
(PVC Plate is black)



**OlyLok Locking
Impact Nail**
1.4" and 1.8" (35 and
45mm) tube lengths
with 2.7" (70mm) plate
LWIC G CWI deck types



Base Sheet Fastener
1.2" and 1.75" (30 and
45mm) lengths
Available assembled with
2.75" (70mm) plate
LWIC G * deck types
* Restrictions apply.



Lip Bar
3/4" (19mm) wide,
3/16" (5mm) lip, .090"
(2.3mm) thick. Punched
6", 8", or 12"
(150, 200 or 300mm)
o.c. Terminates
single-ply membrane
at parapet walls.



Flat Bar
1" (25mm) wide, .090"
(2.3mm) thick. Punched
6", 8", or 12" (150,
200 or 300mm) o.c.
Terminates single-ply
membrane at parapet
walls.



Channel Bar
1" (25mm) wide, .100"
(2.5mm) thick. Punched
6", 8", or 12" (150,
200 or 300mm) o.c.
Terminates single-ply
membrane at parapet
walls.



**Lite-Deck
Batten Bar**
18 ga. (1.3mm) thick
Punched 6" or 12"
(150 or 300mm) o.c.
LC G CWI deck types.



RhinoTrac EZ

RhinoBond®

CHANGING THE WORLD, ONE ROOF AT A TIME

With wind ratings of FM 1-180 and higher, more evenly spaced fasteners and zero membrane penetrations, it's no wonder that RhinoBond is recognized as one of the best performing roofing systems in the industry. You might say it's revolutionizing the commercial roofing industry around the globe.

Based on patented Sinch® electromagnetic welding technology, RhinoBond is approved by Factory Mutual and all leading roofing system manufacturers.

The system uses the same fastener and plate to secure the insulation and the thermoplastic membrane. Since the fastening points are spread across the roof in a grid pattern, the uplift load is more evenly distributed. The result is higher wind ratings with fewer fasteners, fewer seams and zero penetrations of the new membrane.

RHINO BOND PERFORMANCE FROM START TO FINISH

Using the entire RhinoBond System including RhinoTrac® EZ, RhinoBond with OptiWeld, and the RhinoBond Hand Welder, in conjunction with OMG RhinoBond Plates, provides RhinoBond performance across the roof.

RhinoTrac is designed to drive fasteners straight and to the right depth every time. New OptiWeld Technology automatically calibrates the RhinoBond tool to provide the correct amount of energy required to generate consistent, high-performing, bonds with properly installed RhinoBond Plates. RhinoBond Hand Welders enable induction welding everywhere on the roof, including under raised structures and on vertical surfaces!

Check out our RhinoBond calculator to see how much material you can save on your next project.

Visit OMGRoofing.com



Hand Welder 3



GLOBAL USE

- World's Leading Induction Based Roofing System
- 3 Billion Sq. Ft. Installed
- 1,000's of Projects
- 42 Countries
- Accepted and supported by most roofing system manufacturers





OlyBond® Adhesives

OLYBOND – THE MOST TRUSTED NAME IN COMMERCIAL ROOFING ADHESIVES



OlyBond500

Small Canisters Kit

OlyBond® Adhesives are easy to use, hassle-free and designed to get you off the roof and onto the next job quickly. OlyBond is a fast-acting, two-component, low-rise polyurethane foam adhesive designed to adhere most insulation types to a wide selection of common roof decks and materials.

OlyBond can be used in both new and re-roofing applications, including projects that require multiple insulation layers, and projects with fleece back membrane. No matter the


PaceCart®3



PaceCart® PR015



Power Gun Applicator

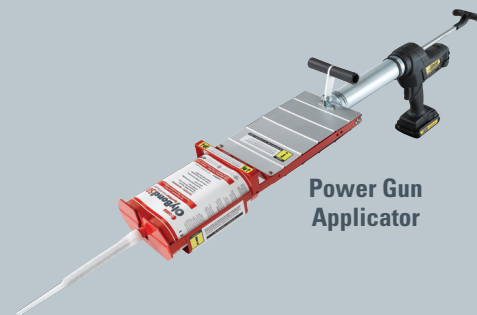

Product	Packaging	Application Equipment	Ideal Job Type
OlyBond Classic	50 Gallon Drum sets (100 gallon sets)	Spray Rig	Large production jobs and new construction.
OlyBond500® Drums	15 Gallon Drums (30 gallon sets)	PaceCart3 with Drum Conversion Kit	Large production jobs.
OlyBond500 Bag-in-Box	5 Gallon Bag-in-Box (10 gallon sets)	PaceCart3	Medium to large jobs.
OlyBond500 SpotShot	1,500 ml Cartridges (4 / box)	SpotShot Power Applicator or Hand Applicator	Small to medium jobs.
OlyBond500 Canisters	Two-Part Canister Sets	Self Contained	Medium jobs where large application equipment is not practical.
OlyBond500 Small Canisters Kit	Two-Part Canister Sets	Self Contained	Pequeños trabajos y reparaciones.



OlyBond500 Bag-in-Box and SpotShot Cartridges



OMG PowerGrip™

HARNESS THE SUN WITH POWERGRIP

When it comes to securing solar racking systems to commercial rooftops, nothing is as easy or practical as OMG's family of PowerGrip Products. OMG PowerGrip products are watertight attachment systems that provide a secure connection directly to the roof deck or structural members. Regardless of the roof system or assembly, OMG has a PowerGrip solution that works for every commercial roofing system.

OMG Roofing Products offers PowerGrip roof mounts in three configurations, and all can be installed without the need to cut open or 'core' the roof.

- PowerGrip Plus uses a traditional membrane flashing. It's designed to be used in both ballasted and non-ballasted systems.
- PowerGrip Universal 7 can be used on any type of commercial roof. PGU-7s have superb strength to resist tensile (uplift), shear and compressive forces. In addition, it's designed with a redundant water blocking system for long term performance.
- PowerGrip Universal 11 has all the qualities of the Universal 7, with even more strength.

Test	Plus	Universal 7	Universal 11
Tensile	2,013 lbf.	2,051 lbf. (9.1 kN)	3,343 lbf. (14.9 kN)
Shear	1,077 lbf.	1,581 lbf. (7.0 kN)	2,537 lbf. (11.3 kN)
Compressive	1,178 lbf.	2,214 lbf. (9.8 kN)	2,749 lbf. (12.2 kN)

OMG PowerGrip PLUS



OMG PowerGrip UNIVERSAL 11



OMG PowerGrip UNIVERSAL 7



OMG PowerGrip PLUS



OMG PowerGrip UNIVERSAL 7



OMG PowerGrip UNIVERSAL 11



OMG
PipeGuard
ROOFTOP PIPE SUPPORTS

UNIVERSAL PIPEGUARD FEATURES:

- Accommodates pipes and conduit from 1/2- to 6-inches (13 to 152 mm) in diameter, and heights from 1 1/2- to 10-inches (38 to 254 mm) above the roof.
- Compatible with steel and PVC pipes, copper tubing, as well as electrical, solar and HVAC conduit.
- Made of recycled materials and rubber, PipeGuard products will not rot or deteriorate on the roof like wood blocks.
- Triangle shape sheds water, provides superior stability and helps prevent damage to roof covers.
- Your choice of supports for single pipes or strut models for multiple pipes.
- Custom designs are also available. Call 800.633.3800 for details.




PipeGuard Pipe Supports

WE DO THE HEAVY LIFTING FOR YOU!

When it comes to supporting small rooftop pipes and conduit, nothing is faster or easier than OMG PipeGuard®. With nine models ranging in size and configuration, there's a PipeGuard for virtually every application. No wonder PipeGuard is the industry's preferred pipe support. Nothing is as fast, easy or economical.

The line of PipeGuard Pipe Supports is designed to hold rooftop pipes up to 6-inches (150 mm) in diameter. Plus PipeGuard Pipe Supports are better alternatives than wood blocks because they will not rot or deteriorate. Made of heavy duty EPDM and/or recycled HDPE, OMG PipeGuard units will not damage roof covers. Additionally, they are compatible with steel and PVC piping, conduit and copper tubing, as well as electrical, solar, gas and HVAC lines.

PipeGuard units install in seconds with no special tools! Nothing is faster or easier! Be sure to ask about our custom capabilities too!

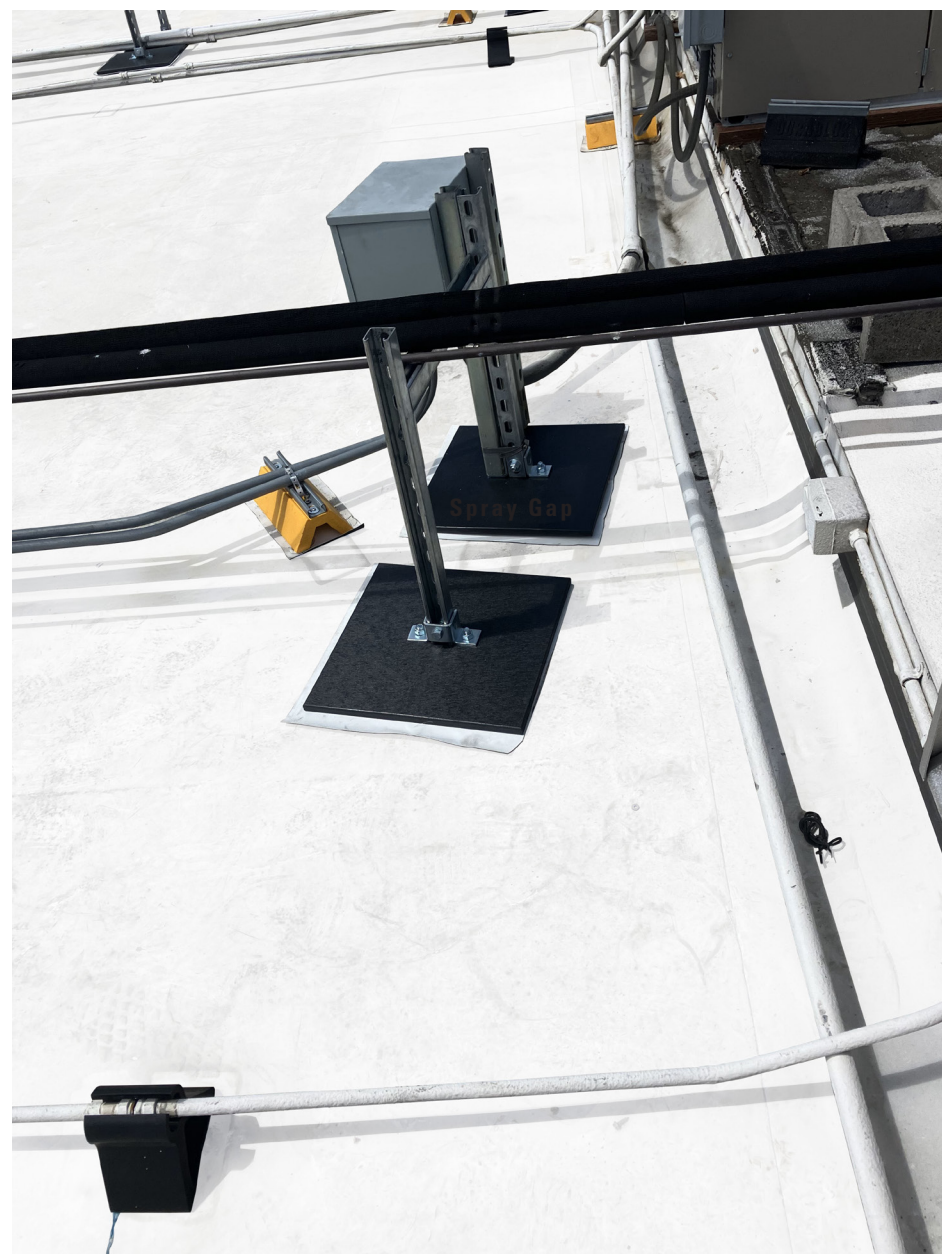

OlyFill™ Foam Sealant

GET THE PURPLE STUFF!

OlyFill™ Foam Sealant is a fast-curing, two-component closed-cell foam ideal for sealing gaps and penetrations on low-slope roofs. Available in large (600 board feet) and small (200 board feet) canisters, it covers up to 7,200 linear feet (1" wide) or 3,600 linear feet (2" wide) and includes bead and fan pattern mixing tips with extension tubes.

The foam is tack-free in 30 seconds and fully cured within minutes, making it perfect for quick applications. It's easy to cut or trim, fire-rated Class A (UL 723), and environmentally friendly, with no HFCs. Ideal for roof/wall junctions, rooftop penetrations, and temporary tie-ins, it also features Xtra Purple™ for easy identification during use.




Large Canisters



Small Canister Kit



Spray Gap



Allow to Rise



Trim to Size

OlyGlu™ Membrane Adhesive

GLU WITH CONFIDENCE

OlyGlu™ TPO/EPDM Canisters are fast-acting, low-VOC membrane adhesives that work in temperatures as low as 20°F (-6°C), making them ideal for year-round roofing. Large canisters cover up to 10 squares and small ones up to 3, with a spray wand and hose for quick, efficient application. The formula offers fast flash time, extended open time, and strong performance—even on vertical surfaces—reducing labor and simplifying installation compared to bucket adhesives.



Perfect Coverage
Web Patterns are Touching, Ensuring
100% Coverage

OMG
OlyFill
FOAM SEALANT



OMG
OlyGlu
MEMBRANE ADHESIVE



Good Choice



Hercules

OMG RetroDrain®

SO EASY TO INSTALL, YOU WON'T WANT TO REWORK!

OMG offers the broadest line of roof drains in the industry, all designed to provide a secure, watertight connection to the existing plumbing drain leader, for a better performing roof.

Durable and highly reliable, OMG's line of OlyFlow® Drains exceed industry standards and are engineered for easy installation from the rooftop without disturbing building occupants. Several OMG drains incorporate our exclusive Vortex Breaker Strainer™ technology for flow performance that rivals many traditional new connection drains. In addition, many OlyFlow Drains are "drop-in-ready" for installation directly from the box, and are made with a one-piece seamless body with extra-large flange and built in sump for improved performance.

When your job calls for drain work, call for an OlyFlow Drain from OMG Roofing Products!

CODE COMPLIANT AND EXCEEDS INDUSTRY STANDARDS!

OMG Hercules®, Hercules Plus and SpeedTite® Drains are certified to conform with the ASME 112.6.4 and CSA-B79-08 standards. As such, these drains meet both the International Plumbing Code (IPC) and the Uniform Plumbing Code (UPC) requirements for use in re-roofing applications in the U.S. and in Canada.



In addition, OlyFlow Insert Drains exceed ANSI/ SPRI RD-1, a national performance standard for retrofit roof drains. Most retrofit roof drains are not tested to this standard.



Accu-Tools NOW CORDLESS

THE RIGHT TOOL MAKES ALL THE DIFFERENCE

The new AccuTrac® EZ family of stand-up insulation attachment tools offers a more productive and healthier alternative for installing roofing fasteners.

AccuTrac EZ is designed for insulation attachment and RhinoTrac® EZ is for installing RhinoBond Plates. In one motion, the tool aligns the plate as the operator drives the fastener, doing the work of two and saving valuable time and resources. Since each fastener is properly aligned perpendicular to the surface of the roof, Accu-Tools help to ensure you get maximum thread engagement, pullout resistance, and a better overall installation.

COMPARE THE LABOR STEPS

AccuTrac EZ and RhinoTrac EZ can help you get ahead of schedule, allowing you to redistribute job-site labor to handle time-consuming detail work or other tasks. The chart below shows the possible productivity gains compared to the labor steps and time to install loose plates and screws or pre-assembled fasteners.

LABOR STEPS TIMELINE				
Method	Step 1	Step 2	Step 3	Step 4
Loose Screws & Plates	Place Board	Place Plate	Place Screw	Drive Screw
Time	→			
Assembled Screws & Plates	Place Board	Place ASAP	Drive ASAP	
Time	→			
AccuTrac or RhinoTrac System	Place Board	Install Screw & Plate using Tool	TIME SAVINGS	
Time	→			



OMG AccuTrac EZ FASTENING SYSTEM



MAXIMIZE ROOFTOP PRODUCTIVITY WITH ACCUTRAC EZ AND RHINOTRAC EZ

OMG RhinoTrac EZ FASTENING SYSTEM



BATTERY NOT INCLUDED

Best Option!



SpeedTite