



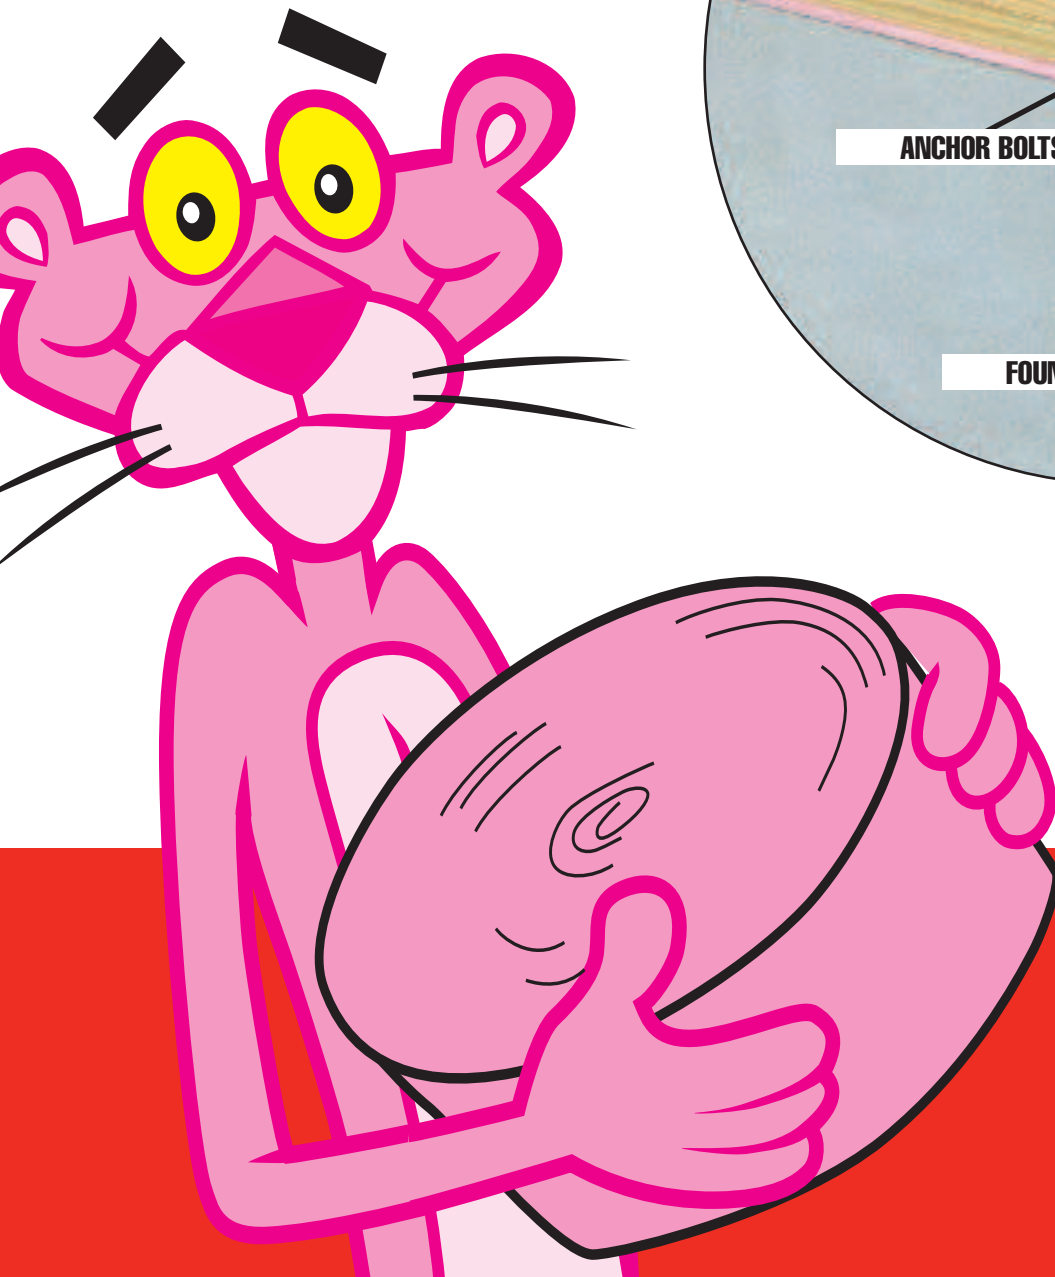

# FoamSealR™

**Multi-purpose sill plate gasket provides resilient sealing in new and retrofit construction**

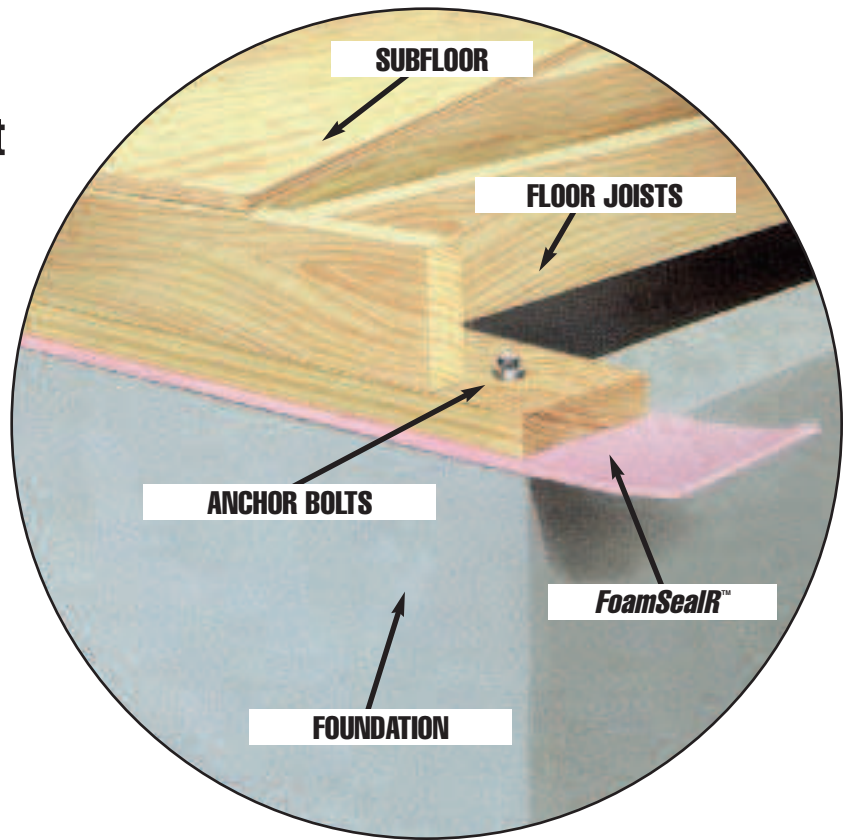

INNOVATIONS FOR LIVING™

- Fills gaps between sill plate and top of foundation wall for less air infiltration.
- Easy to install with no need for special tools.
- Resists moisture penetration to interior of structure.
- Helps seal out insects.
- Available in convenient 82' rolls.
- 3½" and 5½" widths x 3/16" thickness to fit most standard frame construction.

# FoamSealR...an effective, long-lasting solution to air infiltration.

A good percentage of a building's heat loss is directly attributed to air infiltration. A significant part of this loss can be prevented by using *FoamSealR*, Owens Corning's sill gasket, to fill the gap between the sill plate and foundation wall for a tight, uniform fit. As a polyethylene foam, *FoamSealR* is durable and moisture-resistant so it will remain intact for years of energy-saving performance

## Installation

1. Smooth top surface of foundation wall to no greater variation than  $\frac{1}{8}$ " and brush off loose debris.
2. Unroll *FoamSealR* on top surface of foundation wall or fasten to bottom of sill plate on tilt-up wall sections.
3. Butt all end and perpendicular joints tightly.
4. Pierce *FoamSealR* at anchor bolt locations.
5. Set and anchor sill plate to foundation wall.

## Packaging


Size ( $\frac{3}{16}$ " thick)	Rolls Per Bag	Bags Per Ctn	Ctns Per Unit
3½"W x 82'L	12	4	2
5½"W x 82'L	8	4	2

**Coverage: Approximately two (2) rolls per average house.**

Caution: *FoamSealR* is polyethylene foam. It is combustible and should not be exposed to flame or other ignition sources.

Trademark: *FoamSealR* is a trademark of UC Industries Inc., an Owens Corning Company.

Notice: We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by the application of these goods not in accordance with current print instructions or for other than the intended use. Our liability is expressly limited to the replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from the date the defect was or reasonably should have been discovered.

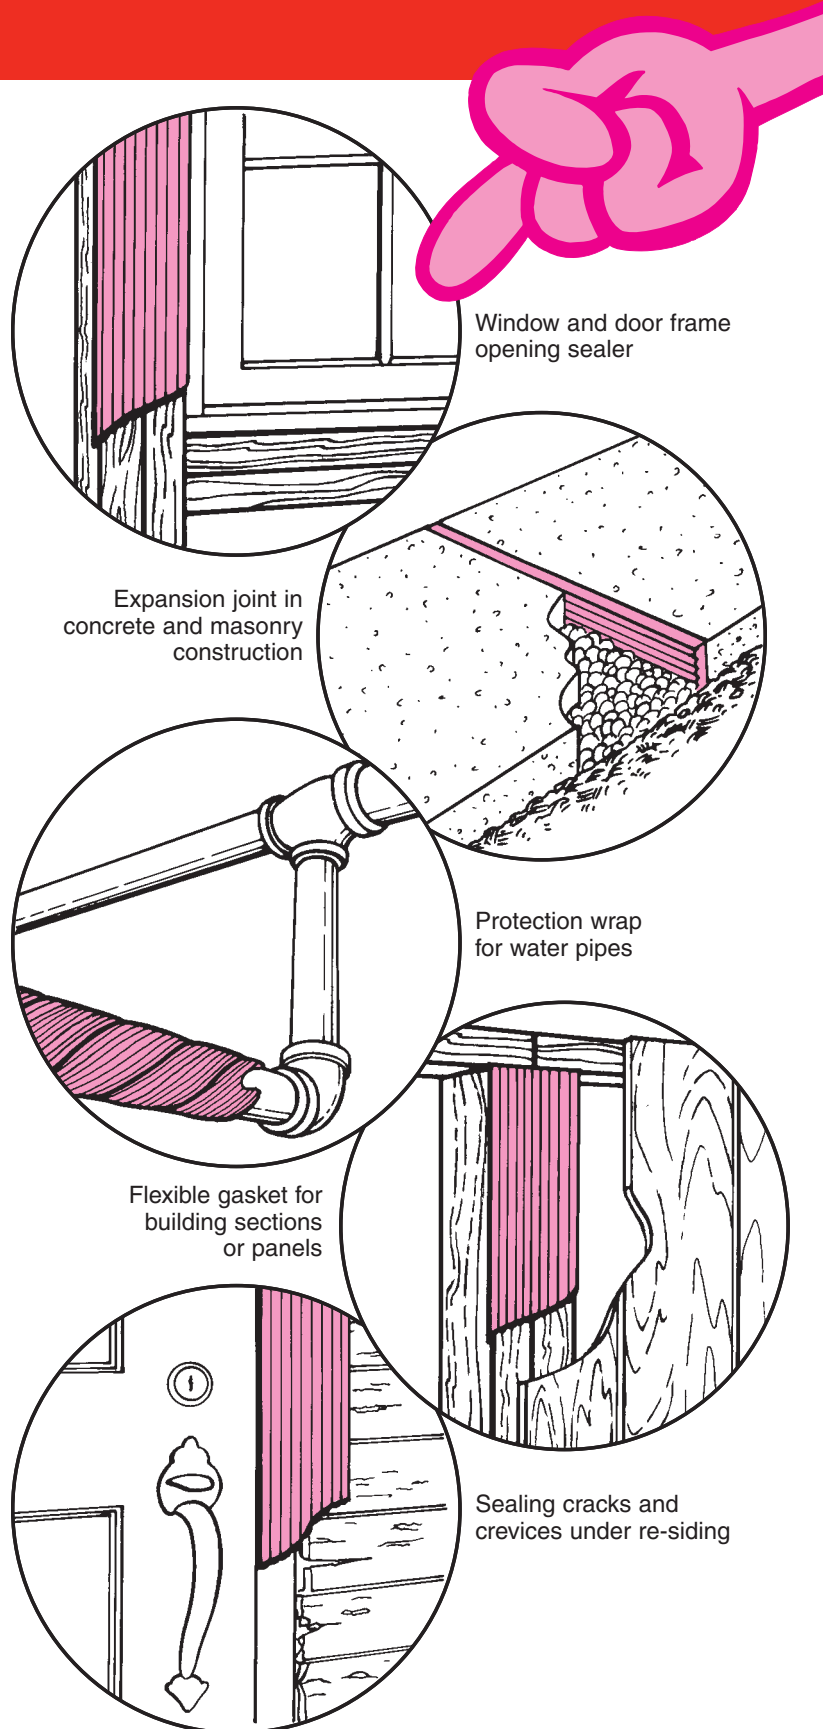

Window and door frame opening sealer

Expansion joint in concrete and masonry construction

Protection wrap for water pipes

Flexible gasket for building sections or panels

Sealing cracks and crevices under re-siding



OWENS CORNING CANADA LP  
3450 McNicoll Avenue  
Scarborough, ON M1V 1Z5

1-800-GET-PINK®  
www.owenscorning.ca

INNOVATIONS FOR LIVING™