


# QuietGlue® Pro

Acoustical Glue

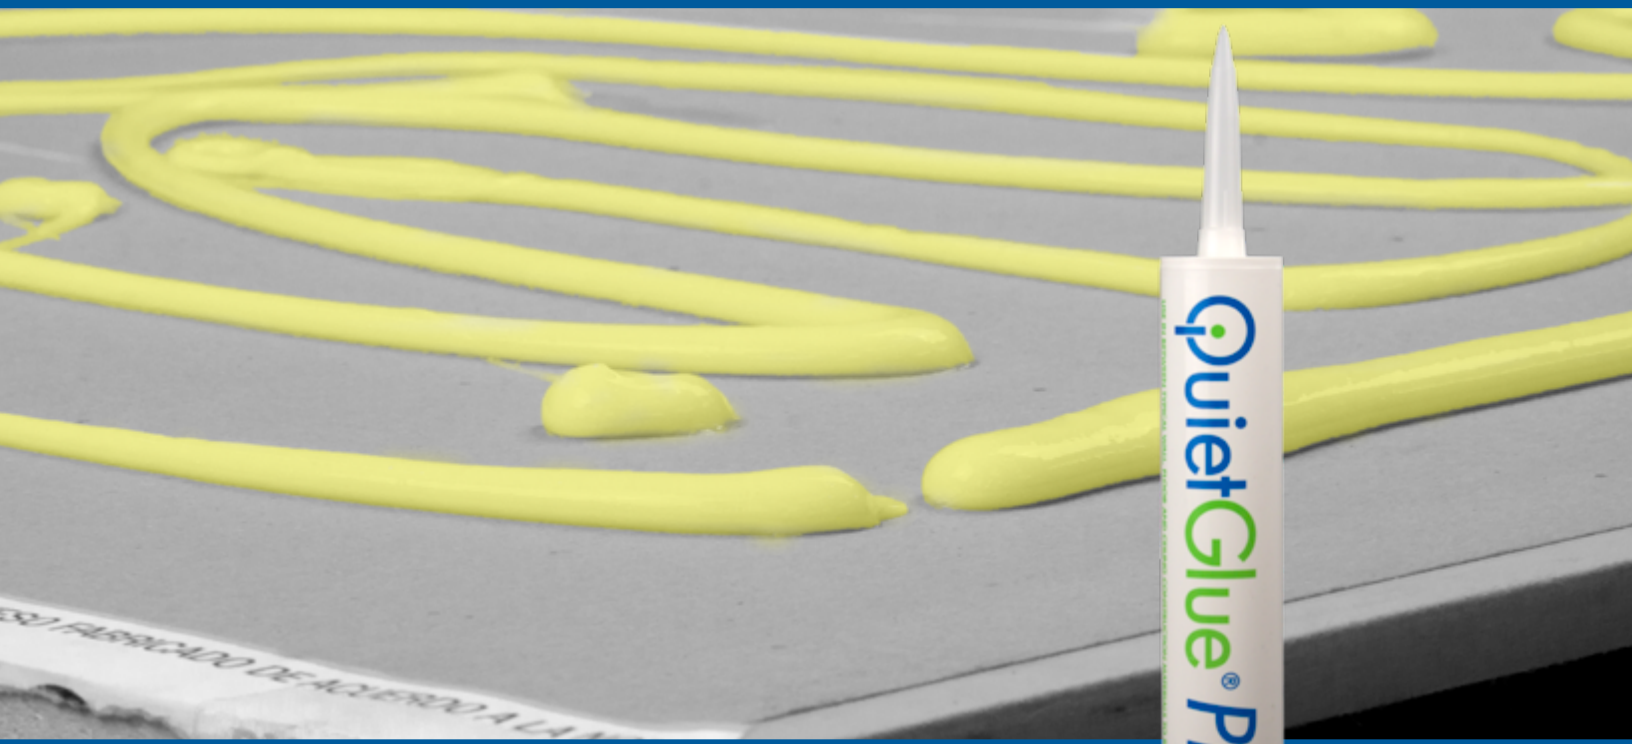


## High Performing Noise Reducing Glue

QuietGlue® Pro is a high performance, non-structural, acoustical product ideal for small to medium do-it-yourself projects.


### QuietGlue® Pro Benefits:

- Easy to use
- Ideal for use with virtually any kind of wood or drywall
- Does not require special training
- Low VOC, water-based compound, solvent-free
- Lab tested in accordance with ASTM D3273 and E90

### STOP THE NOISE IN 2 EASY STEPS



1 Dispense Glue



2 Screw onto wall

### Product Specifications:

<b>Model:</b>	QuietGlue® Pro
<b>Color:</b>	Yellow
<b>Density:</b>	8.3 lbs/gal
<b>Solid content:</b>	>70 wt %
<b>Viscosity:</b>	400,000 - 800,000 centipoise
<b>Drying time:</b>	24-48 hours
<b>Coverage:</b>	Use two (2) tubes per standard length (8'-12') panel
<b>Storage temp:</b>	40° F - 100° F (Do Not Freeze)
<b>Working time:</b>	1-2 hours
<b>Available sizes:</b>	28-oz tube, case of 12 28-oz tubes

*Note: Tubes require a standard caulking gun. Application of excess glue will not improve results and can potentially cause seepage of excess glue along the edges. Leave a clean 3" border around the panel edges and all cut outs. Fasteners are required as product is not a sealant or adhesive.*

Visit [www.QuietRock.com](http://www.QuietRock.com) for installation instructions and complete documentation.