


QuietGlue® Pro

Acoustical Glue

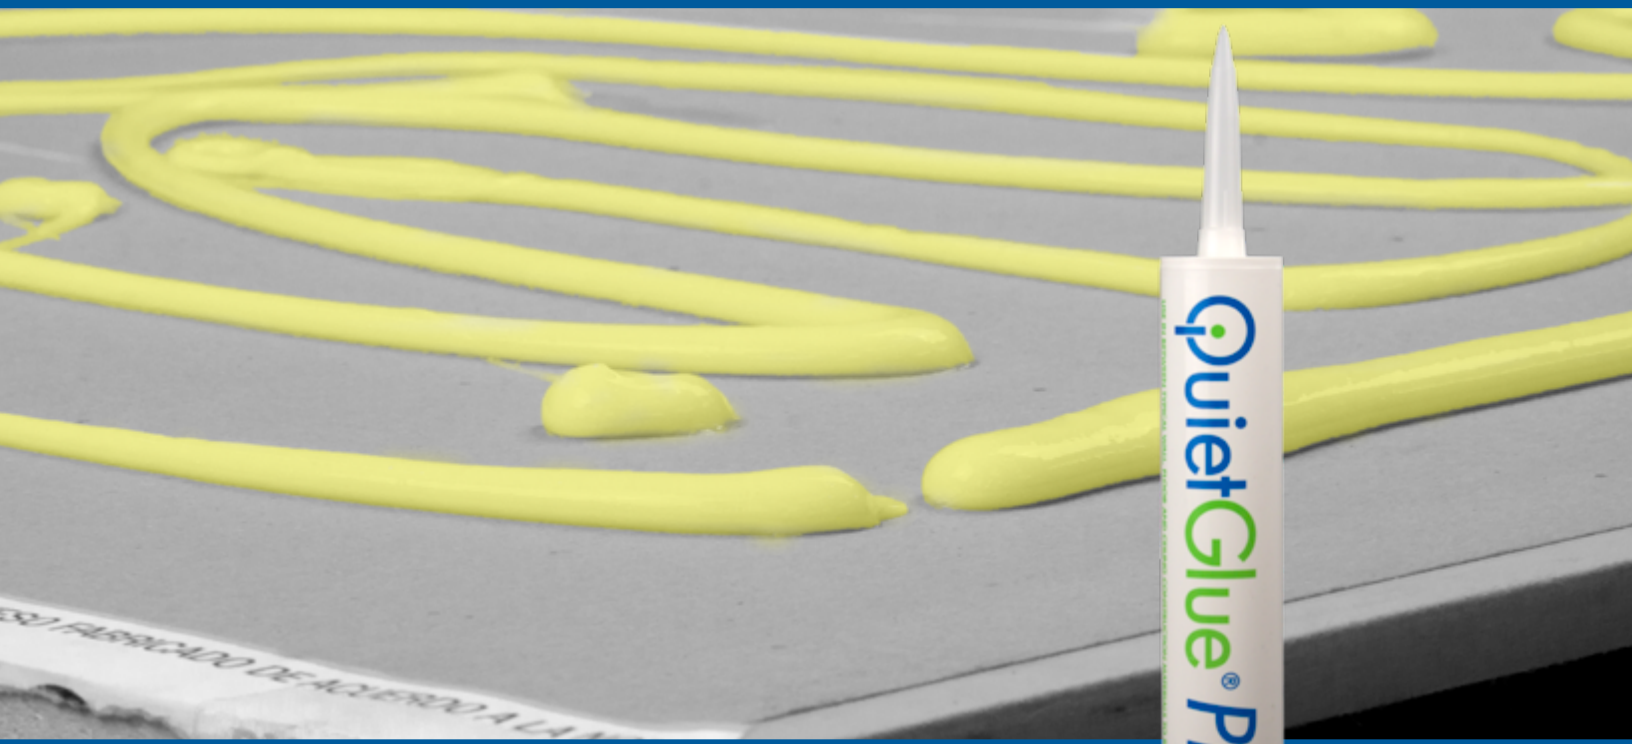


High Performing Noise Reducing Glue

QuietGlue® Pro is a high performance, non-structural, acoustical product ideal for small to medium do-it-yourself projects.


QuietGlue® Pro Benefits:

- Easy to use
- Ideal for use with virtually any kind of wood or drywall
- Does not require special training
- Low VOC, water-based compound, solvent-free
- Lab tested in accordance with ASTM D3273 and E90

STOP THE NOISE IN 2 EASY STEPS

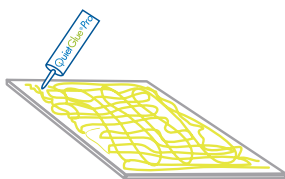

1 Dispense Glue



2 Screw onto wall

Product Specifications:

Model:	QuietGlue® Pro
Color:	Yellow
Density:	8.3 lbs/gal
Solid content:	>70 wt %
Viscosity:	400,000 - 800,000 centipoise
Drying time:	24-48 hours
Coverage:	Use two (2) tubes per standard length (8'-12') panel
Storage temp:	40° F - 100° F (Do Not Freeze)
Working time:	1-2 hours
Available sizes:	28-oz tube, case of 12 28-oz tubes

Note: Tubes require a standard caulking gun. Application of excess glue will not improve results and can potentially cause seepage of excess glue along the edges. Leave a clean 3" border around the panel edges and all cut outs. Fasteners are required as product is not a sealant or adhesive.

Visit www.QuietRock.com for installation instructions and complete documentation.