



3/4" Bullnose Kerf

3/4" Bullnose Kerf has a unique shortened back flange allowing for easy insertion into kerfed door jambs and window frames. This provides the smooth, round appearance associated with bullnose trims. Also available in 1-1/2" radius.

Product Data and Ordering Information

Material: .0.12 min thickness, minimum G40 galvanized
Part Number: BK3HDG

| Length | Pieces Per Carton | Cartons Per Pallet | Feet Per Carton |
|--------|-------------------|--------------------|-----------------|
| 7' | 58 | 40 | 406 |
| 8' | 50 | 40 | 400 |
| 9' | 45 | 40 | 405 |
| 10' | 40 | 40 | 400 |

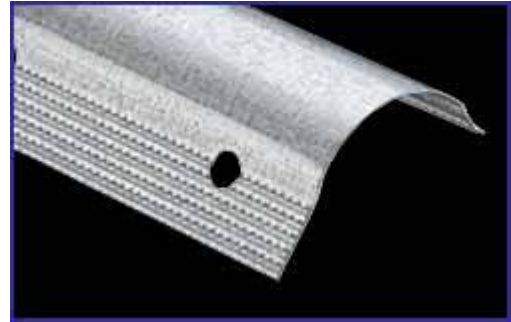

Drawing not to scale

All Phillips products are made in the U.S.A.

ASTM and Code Standards

Phillips 3/4" Bullnose Kerf meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at www.phillipsmfg.com.

Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%
Post-consumer recycled content: 25%
Pre-consumer recycled content: 5%

Storage

Avoid bending or other damage and store in a dry place protected from moisture.

Project Information

Name: test
Address:

Contractor Information

Name: buildsite.com
Contact: Sue Marek
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax:

