


## 1-1/2" Bullnose Kerf

1-1/2" Bullnose Kerf has a unique shortened back flange allowing for easy insertion into kerfed door jambs and window frames. This provides the smooth, round appearance associated with bullnose trims. Also available in 3/4" radius.

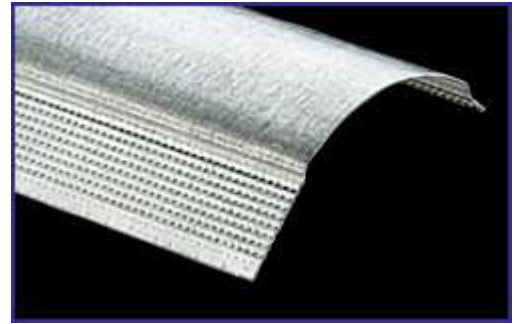

### Product Data and Ordering Information

Material: .0.12 min thickness, minimum G40 galvanized  
Part Number: BK5HDG

Length	Pieces Per Carton	Cartons Per Pallet	Feet Per Carton
7'	28	40	196
8'	24	40	192
9'	22	40	198
10'	20	40	200


All Phillips products are made in the U.S.A.

### ASTM and Code Standards

Phillips 1-1/2" Bullnose Kerf meet or exceed the following ASTM standards:

- ASTM C1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

SDS and other technical information available at [www.phillipsmfg.com](http://www.phillipsmfg.com).



*Drawing not to scale*

### Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%  
Post-consumer recycled content: 25%  
Pre-consumer recycled content: 5%

### Storage

Avoid bending or other damage and store in a dry place protected from moisture.