




gripSTIK® 3/4" Bullnose

gripSTIK® 3/4" Bullnose creates a smooth, rounded look to drywall corners. This easy-to-install 90° corner support can be nailed, stapled or applied with spray adhesive. The specially knurled and perforated flanges allow excellent joint compound adhesion. No mud additives or priming are needed prior to painting. Phillips bead is dent resistant, won't rust and easy to cut with shears, knife or fine-tooth hacksaw.

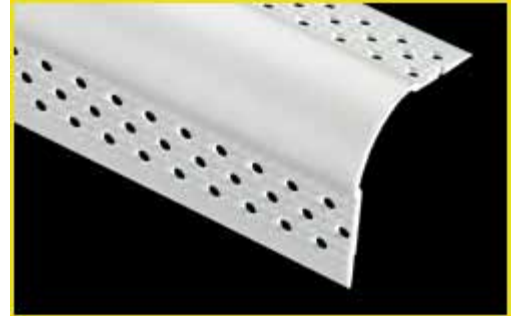


Product Data and Ordering Information

Material: Extruded rigid vinyl; contains no asbestos
 Dimensions: 7/8" leg x 7/8" leg, 3/4" radius
 Part Number: BN3VYL

| Length | Pieces Per Carton | Cartons Per Pallet | Feet Per Carton |
|--------|-------------------|--------------------|-----------------|
| 8" | 35 | 50 | 280 |
| 9' | 35 | 50 | 315 |
| 10' | 35 | 50 | 350 |

All Phillips products are made in the U.S.A.

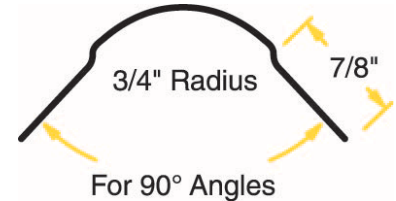

Drawing not to scale

ASTM and Code Standards

Phillips gripSTIK® 3/4" Bullnose meets or exceeds:

- ASTM C 1047 Standard Specification for Accessories for Gypsum Wallboard
- ASTM D 1784 Standard Specification for Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds
- ASTM D 3678 Standard Specification for Rigid Poly (Vinyl Chloride) (PVC) Interior-Profile Extrusions

SDS and other technical information available at www.phillipsmfg.com

Patents

U.S. Patents 6,295,776 and 6,691,476

Leed Credits for Recycled Content

MR2 – The steel and vinyl used in Phillips Manufacturing products is 100% recyclable.

MR4 – Phillips Manufacturing steel and vinyl products have a minimum of:

Total recycled content: 30%
 Post-consumer recycled content: 25%
 Pre-consumer recycled content: 5%

Storage

Avoid damage and store in a covered area away from direct sunlight.

Project Information

Name: test
 Address:

Contractor Information

Name: buildsite.com
 Contact: Sue Marek
 Phone:
 Fax:

Architect Information

Name:
 Contact:
 Phone:
 Fax:

